INCH-POUND


MS51823G
w/AMENDMENT 1
9 September 2026
SUPERSEDING
MS51823G
30 March 2022

DETAIL SPECIFICATION SHEET

NUT, TUBE COUPLING, FLARELESS TYPE, HYDRAULIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

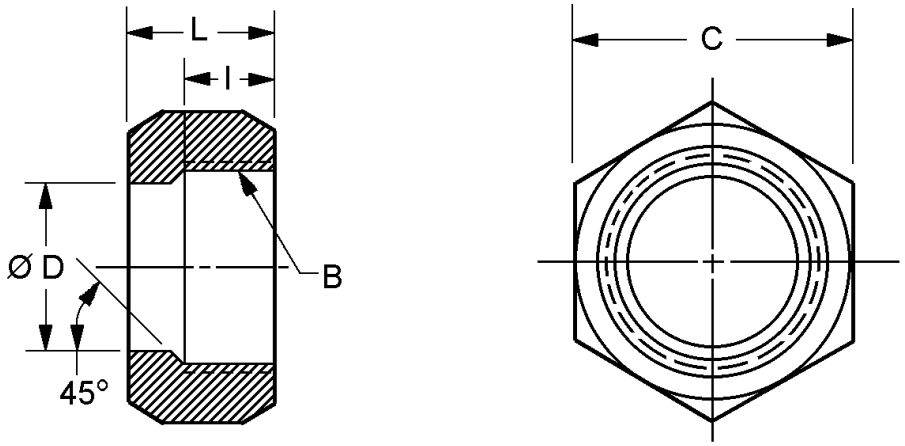

See notes at end of figure.

FIGURE 1. Nut, tube coupling.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Dash number	Tube OD Nom inches (mm)	B Straight thread Class 2B (see note 5)	C Hex flat Nom (see note 6)	D diameter inches (mm)	Tolerance inch (mm)
-1	.1250 (3.175)	.3125 - 24UNF	3/8	.130 (3.30)	+.004 (0.10) -.000
-2	.1875 (4.763)	.3750 - 24UNF	7/16	.193 (4.90)	+.004 (0.10) -.000
-3	.2500 (6.350)	.4375 - 20UNF	9/16	.255 (6.48)	+.004 (0.10) -.000
-4	.3125 (7.936)	.5000 - 20UNF	5/8	.318 (8.08)	+.004 (0.10) -.000
-5	.3750 (9.525)	.5625 - 18UNF	11/16	.380 (9.65)	+.004 (0.10) -.000
-6	.5000 (12.700)	.7500 - 16UNF	7/8	.505 (12.83)	+.005 (0.13) -.000
-7	.6250 (15.875)	.8750 - 14UNF	1	.631 (16.03)	+.005 (0.13) -.000
-8	.7500 (19.050)	1.0625 - 12UN	1 1/4	.756 (19.20)	+.005 (0.13) -.000
-9	.8750 (22.225)	1.1875 - 12UN	1 3/8	.881 (22.38)	+.005 (0.13) -.000
-10	1.0000 (25.400)	1.3125 - 12UN	1 1/2	1.006 (25.55)	+.005 (0.13) -.000
-11	1.2500 (31.750)	1.6250 - 12UN	2	1.260 (32.00)	+.006 (0.15) -.000
-12	1.5000 (38.100)	1.8750 - 12UN	2 1/4	1.510 (38.35)	+.006 (0.15) -.000
-13	2.000 (50.800)	2.5000 - 12UN	2 7/8	2.014 (51.16)	+.006 (0.15) -.000

Dash number	I inch (mm) +.015 (0.38) -.000	L inch (mm) ±.02 (0.5)
-1	.388 (9.86)	.53 (13.46)
-2	.459 (11.66)	.61 (15.49)
-3	.537 (13.64)	.70 (17.78)
-4	.552 (14.02)	.72 (18.29)
-5	.568 (14.43)	.75 (19.05)
-6	.599 (15.21)	.84 (21.34)
-7	.677 (17.20)	.92 (23.37)
-8	.677 (17.20)	.97 (24.64)
-9	.677 (17.20)	1.00 (25.40)
-10	.677 (17.20)	1.05 (26.67)
-11	.645 (16.38)	1.05 (26.67)
-12	.639 (16.23)	1.03 (26.16)
-13	.615 (15.62)	1.12 (28.45)

FIGURE 1. Nut, tube coupling - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Remove all burrs and slivers.
4. Dimensions and tolerances not shown shall be in accordance with SAE-J514-2.
5. ASME B1.1 - Unified Inch Screw Threads (UN and UNR Thread Forms)
6. Across flat widths shall fit standard wrench openings, see ASME B18.2.2.
7. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Nut, tube coupling – End.

REQUIREMENTS:


Nut, tube coupling shall be as specified on figure 1.

Materials and finish designators shall be in accordance with MIL-DTL-18866.

Unless otherwise specified in MIL-DTL-18866, all platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The tube coupling nuts shall show no evidence of red corrosion after 96 hours of salt spray. Internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514-2.

Part or Identifying Number (PIN): The PIN consists of the letters “MS”, the specification number, a dash, number for nut size, and a letter for material finish designator.

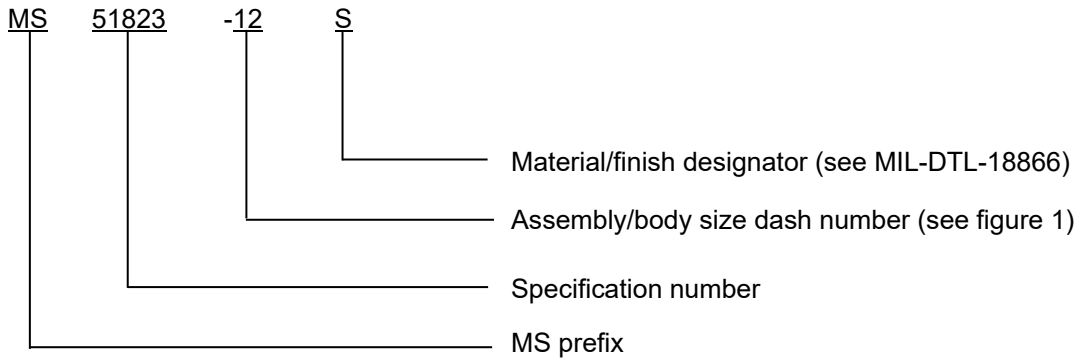

PIN example: MS51823-12S indicates a tube coupling nut for a .6250-inch (15.875 mm) tube OD, with .8750 -14UNF straight threads, corrosion resistant steel passivated.

Marking shall be in accordance with MIL-DTL-18866.

Class I and II ozone depleting substances (ODS) shall not be used in MS51823 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Referenced documents shall be of the issue in effect on date of invitations for bid.

NOTE: The following restrictions do not apply to manufacturers of the fittings and is applicable only to OEM's and users.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Army and Marine ground vehicle applications using zinc plating. PIN codes FC, FD, Z, and ZC finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended for Army and Marine ground systems. The use of coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement. For new designs PIN codes FC, FD, Z, and ZC are not to be supplied to Army and Marine ground forces. PIN code KA (MIL- PRF- 32647 Type K20) is intended as a hazardous free plating material and is a direct replacement for zinc plating with a hexavalent chromium conversion coating. PIN code KA has equivalent torque/tension behavior as the zinc plating it replaces.

Army and Marine ground vehicles. The use of cadmium plating for Army and Marine ground vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

Army and Marine ground vehicle applications using cadmium plating. Pin code J or KB may be substituted for cadmium ("Blank" PIN code) for Army ground vehicle applications. PIN code KB (MIL-PRF-32647 Type K16) is intended as a hazardous free plating material and is a direct replacement for cadmium plating ("Blank" PIN code). PIN code KB has an equivalent torque/tension behavior as the cadmium plating it replaces.

NAVSEA shipboard owned equipment. Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

Table II provides a detail reference data listing for MS39210 to MS51823. This table contains coordination of equivalent tube sizes, in both compression and hydraulic type nuts. Assembly replacement is authorized.

TABLE II. Assembly equivalency (for information only).

Compression MS39210	Hydraulic MS51823	Compression MS39210	Hydraulic MS51823
-1	-1	-7	-7
-2	-2	-8	-8
-3	-3	-9	-9
-4	-4	-10	-10
-5	-5	-11	-11
-6	-6	-12	-12

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

MIL-PRF-32647
MS39210
ASME B1.1
ASME B18.2.2
ASTM B117
SAE-J514-2
T9070-AL-DPC-020/077-2

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - OS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2026-058)

Review activities:
Army - AT, GL, MI
Navy - AS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.