FED. SUP CLASS
5305

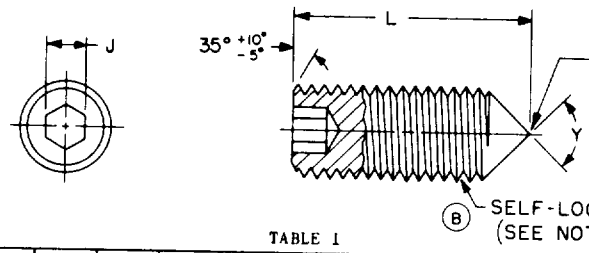


TABLE I

NOMINAL SIZE		.086	.112	.138	.164	.190	.250	.3125	.375	.500
THREADS PER INCH (UNF-3A)		64	48	40	36	32	28	24	24	20
J SOCKET WIDTH ACROSS FLATS	NOM	.035	.050	.062	.078	.094	.125	.156	.188	.250
Y CONE POINT ANGLE	118° ± 2° FOR LENGTHS UNDER	.109	.156	.188	.250	.250	.312	.375	.438	.562
	90° ± 2° FOR THESE LENGTHS AND OVER									

REVIEWER: AV, EL, IS, MI, MU
USER: AT, GL, MC, ME, OS, SH, YD

L LENGTH	TOL	DASH NUMBER													
		PLAIN	PLAIN	PLAIN	PLAIN	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK
.125	±.010	1*	8*	16*	25*		101*								
.188		2*	9*	17*	26*	34*	102		112*						
.250			10*	18*	27*	35*	103	44*	113		125*				
.312				19*	28*	36*	104	45*	114	55*	126				
.375						37*	105	46*	115	56*	127	65*	137		147*
.438							106*		116*						
.500						38*	107	47*	117	57*	128	66*	138	74*	148
.562							108*		118*						
.625							109	48*	119	58*	129	67*	139	75*	149
.750	±.020						110	49*	120	59*	130	68*	140	76*	150
.875									121		131		141		151
1.000							111		122		132		142		152
1.250									123		133		143		153
1.500									124		134		144		154
1.750											135		145		155
2.000											136		146		156
2.500	±.031														157
3.000															158

(B) * Inactive for new design after 29 DEC 1972.

(B) For changes see sheets 1 and 2.

APPROVED 29 JAN 1964 REVISED (A) 13 SEP 1966 (B) 29 DEC 1972

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC
Other Cust AS 82

TITLE
SETSCREW-HEXAGON SOCKET, CONE POINT, ALLOY STEEL, CADMIUM PLATED, UNF-3A, PLAIN AND SELF-LOCKING (B)

MILITARY STANDARD
MS 51974

PROCUREMENT SPECIFICATION
FF-S-200

SUPERSEDES: MS51035, MS51037 and in part MS18067, BCTX2.4, BCTX2.5, BCTX2.12, BCUX2, BCUX3 and BCUX4.3.

SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

To detach this form, cut along this line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: Alloy steel in accordance with procurement specification, having a Rockwell Hardness of C45-53.
2. PROTECTIVE COATING: Cadmium plated in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with MIL-S-7742.
4. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51974-34.
6. SELF-LOCKING ELEMENT:
   (a) The self-locking element shall be in accordance with MIL-F-18240.
   (B) (b) For design and usage limitations, see MS15981.
   (c) Location of effective locking area shall be in accordance with MS15981.
   (d) Maximum ring gage diameter that locking region of setscrew must pass thru freely or with finger pressure shall be the nominal size plus 0.010.
   (e) MIL-F-18240 doesn't establish torque requirements for lengths above the dashed line. Only a positive indication of torque is required.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: AV, EL, IS, MI, MC
USER: AT, GL, MC, ME, OS, SH, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 JAN 1964 REVISED (A) 13 SEP 1966 (B) FOR CHANGES SEE SHEETS 1 AND 2

INTERCHANGEABILITY

Screws covered by the dash numbers given in MS51035 and MS51037 are cancelled after 29 January 1964 and superseded by the screws covered on MS51974 having the same dash numbers. Cancelled screws may be used until existing stocks are depleted. Use only MS51974 screws for new design.

Screws covered by the dash numbers given in MS18067 in part are cancelled. Cancelled screws may be used until existing stocks are depleted. Use only the superseding screws for new design. Replacement shall be in accordance with Table II.

TABLE II (B)

CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING
MS18067	MS51974	MS18067	MS51974	MS18067	MS51974	MS18067	MS51974
DASH NUMBER		DASH NUMBER		DASH NUMBER		DASH NUMBER	
4	101	32	116	64	131	82	145
8	102	37	117	70	132	85	146
13	103	45	118	74	133	92	147
19	104	50	119	78	134	40	148
25	105	57	120	81	135	53	149
31	106	63	121	84	136	60	150
36	107	69	122	91	137	66	151
44	108	73	123	39	138	72	152
49	109	77	124	52	139	76	153
56	110	15	125	59	140	80	154
68	111	21	126	65	141	83	155
9	112	27	127	71	142	86	156
14	113	38	128	75	143	87	157
20	114	51	129	79	144	88	158
26	115	58	130				

P.A. WC Other Cust AS 82	TITLE SETSCREW-HEXAGON SOCKET, CONE POINT, ALLOY STEEL, CADMIUM PLATED, UNF-3A, PLAIN AND SELF-LOCKING (B)	MILITARY STANDARD MS51974
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES: MS51035, MS51037 and in part MS18067, BCTX2.4, BCTX2.5, BCTX2.12, BCUX2, BCUX3 and BCUX4.3.	SHEET 2 OF 2

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

To detach this form, cut along this

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.