INCH-POUND


MS52103G
w/AMENDMENT 1
12 September 2025
SUPERSEDING
MS52103G
2 April 2019

DETAIL SPECIFICATION SHEET

HOSE AND HOSE ASSEMBLY, TYPE III, NONMETALLIC: FUEL AND OIL, MEDIUM PRESSURE, FLARED TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-13444.

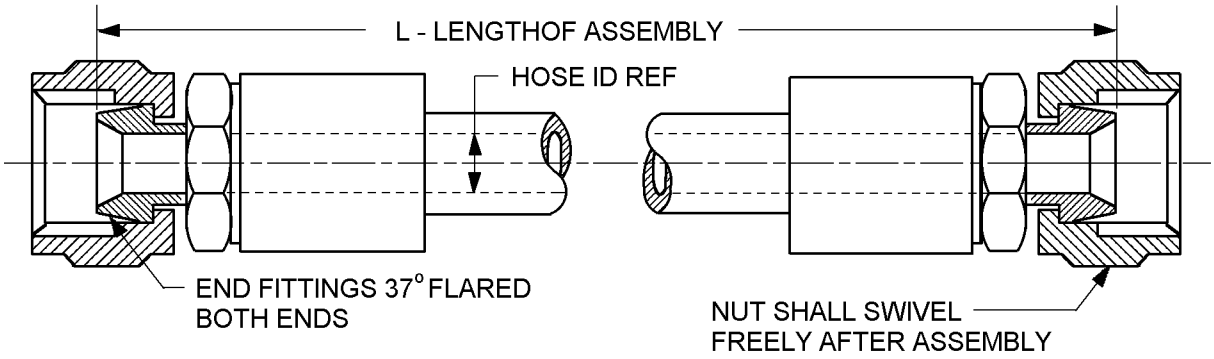

NOTES:
1. All undimensioned pictorial representations are for reference purposes only.
2. Dimension “L” is the defined length of the hose assembly.
3. Hose assemblies shall be specified in the following length increments:
   a. Under 24 inches - 1/2 (.500) inch increments (under 60.96 cm - 12.70 mm increments).
   b. 24 to 36 inches - 1 inch increments (60.96 to 91.44 cm - 25.40 mm increments).
   c. Over 36 inches - in not less than 2 inch increments (91.44 cm in not less than mm increments).
4. Tolerances shall be as specified in the following:
   a. ± 1/8 (.125) inch for length under 18 inches (±3.18 mm for lengths under 457 mm).
   b. ± 1/4 (.250) inch for lengths from 18 to 36 inches (±6.35 mm for lengths from 457 to 914 mm).
   c. ±1/2 (.500) inch for lengths from 36 to 50 inches ((±12.70 mm for lengths from 914 to 1270 mm).
   d. ± 1% for lengths over 50 inches (±1% for lengths over 1270 mm).

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

TABLE I. Hose and fitting thread sizes. 1/ 2/

Dash number	Hose ID ref.	Hose OD ref.	Fitting thread ref
-04	3/16 inch .188 inch 4.78 mm	.484 (12.29)	7/16 - 20UNF-2B
-05	1/4 inch .250 inch 6.35 mm	.547 (13.89)	1/2 - 20UNF-2B
-06	5/16 inch .313 inch 7.95 mm	.609 (15.47)	9/16 - 18UNF-2B
-08	13/32 inch .406 inch 10.31 mm	.734 (18.64)	3/4 - 16UNF-2B
-10	1/2 inch .500 inch 12.70 mm	.828 (21.03)	7/8 - 14UNF-2B
-12	5/8 inch .625 inch 15.88 mm	.953 (24.21)	1-1/16 - 12UN-2B
-16	7/8 inch .875 inch 22.23 mm	1.203 (30.56)	1-5/16 - 12UN-2B
-20	1-1/8 inch 1.125 inch 28.58 mm	1.484 (37.69)	1-5/8 - 12UN-2B
-24	1-3/8 inch 1.375 inch 34.93 mm	1.722 (43.74)	1-7/8 - 12UN-2B
-32	1-13/16 inch 1.813 inch 46.05 mm	2.143 (54.43)	2-1/2 - 12UN-2B

1/ Dimensions are in inches
2/ Metric equivalents are given for information only.

REQUIREMENTS

Design and configuration: See figure 1 and table I.

Hose material: The hose and hose used in assemblies shall be in accordance with MIL-DTL-13444, type III.

Fitting ends: Female fitting ends shall be in accordance with SAE-J514/1 female 37° flare.

Fitting material and finish shall be in accordance with MIL-DTL-13444.

Finish shall meet the salt spray requirements of MIL-DTL-13444.

Fitting material and finish designators, see table II.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

TABLE II. Fitting material/finish designators.

Designator	Material	Finish/plating
A	Carbon steel	Cadmium plated in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/
B	Brass	No Additional Finish
C	Carbon steel	No Additional Finish
H	Carbon steel	Zinc-aluminum in accordance with ASTM F1136/F1136M, grade 3, NC
Q	Carbon steel	Zinc plating in accordance with ASTM B633; type III, FeZn8. 2/ 3/
R	Carbon steel	Zinc plating in accordance with ASTM B633 V, Fe/Zn 8. 2/
S	Stainless steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7, free machining alloy UNS S30300 method 1, type 2 or 4.
Z	Carbon steel	Zinc plated. Zinc plating in accordance with ASTM B695, type II, class 8. 2/ 3/
ZN	Carbon steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/ 4/


1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems. Cadmium is prohibited from use in NAVSEA owned shipboard systems.
2/ Not for use in aircraft. Requires approval from the Program Office for all applications. Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook, "water glycol fluids are highly alkaline due to the presence of amine based corrosion inhibitors. As a result, these fluids can attack zinc, cadmium, magnesium, and non-anodized aluminum, forming sticky or gummy residues." Consequently, these metals should be avoided when selecting system components.
3/ These finishes have a chromate conversion coating or chromic acid rinse which includes hexavalent chromium and are not recommended.
4/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.

Part or Identifying Number (PIN). The PINs used for hose assemblies acquired to this specification are created as shown in the example below.

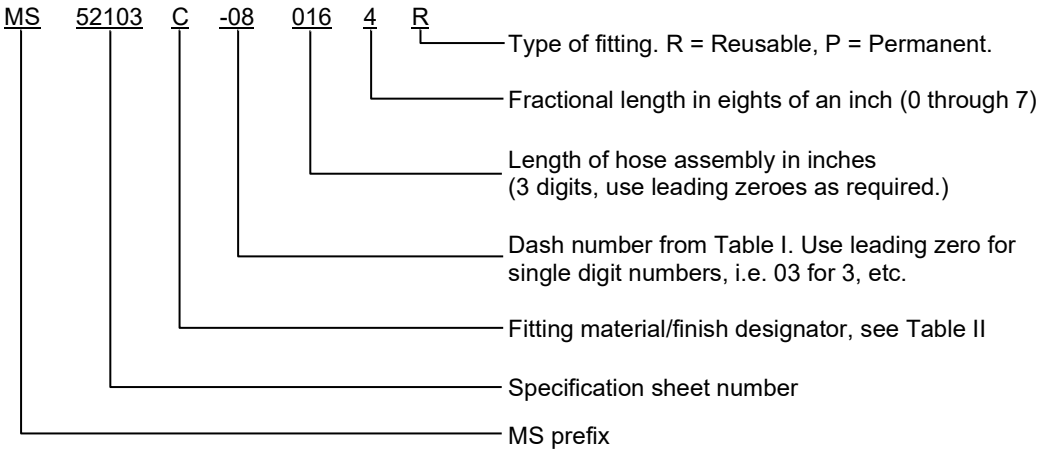

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

PIN. The PINs used for hoses acquired to this specification are created as shown in the example below.

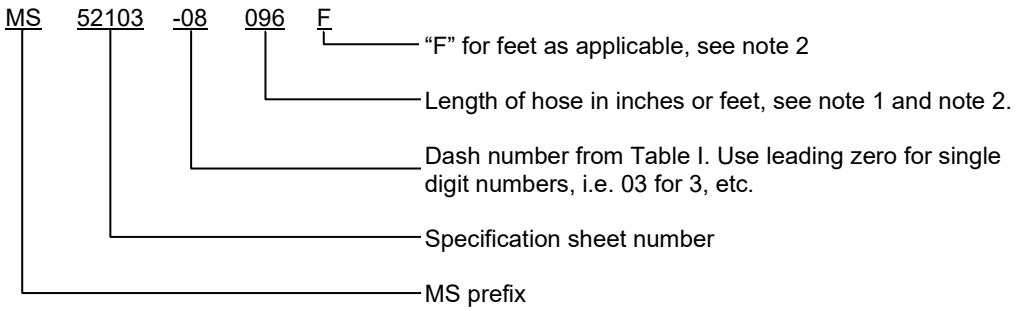

NOTES
1. Length of hose in inches always use three digits; use leading zeros as required. As and example, for 96 inches, use MS52103-08096.
2. When hose length is required in feet use the letter "F" after the required amount of feet. More than three digits may be used to indicate hose length. As an example, for one thousand feet, use MS52103-081000F.

Do not use undesignated PIN's.

Some existing MS PIN's do not completely fit the above layout, but they should continue to be used without change.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Cadmium is prohibited from use in NAVSEA owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2.

Class I and II ozone depleting substances (ODS) shall not be used in MS52103 or any referenced procedures.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-13444, this document references the following:

ASTM B633	SAE-AMS-QQ-P-416
ASTM B695	SAE-AMS2417
ASTM F1136/F1136M	SAE-AMS2700
ASTM MNL37	SAE-J514/1
SAE-AMS-C-81562	T9070-AL-DPC-020/077-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AT
Navy – YD

Review activities:
Army – AR, AV, MI
Navy – AS, MC, SH

Preparing activity:
DLA – CC

(Project 4720-2025-016)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.