
FED. SUP CLASS
2320

(A) INACTIVE FOR NEW DESIGN AFTER 13 FEBRUARY 1989.
FOR NEW DESIGN USE MS52301(AT).

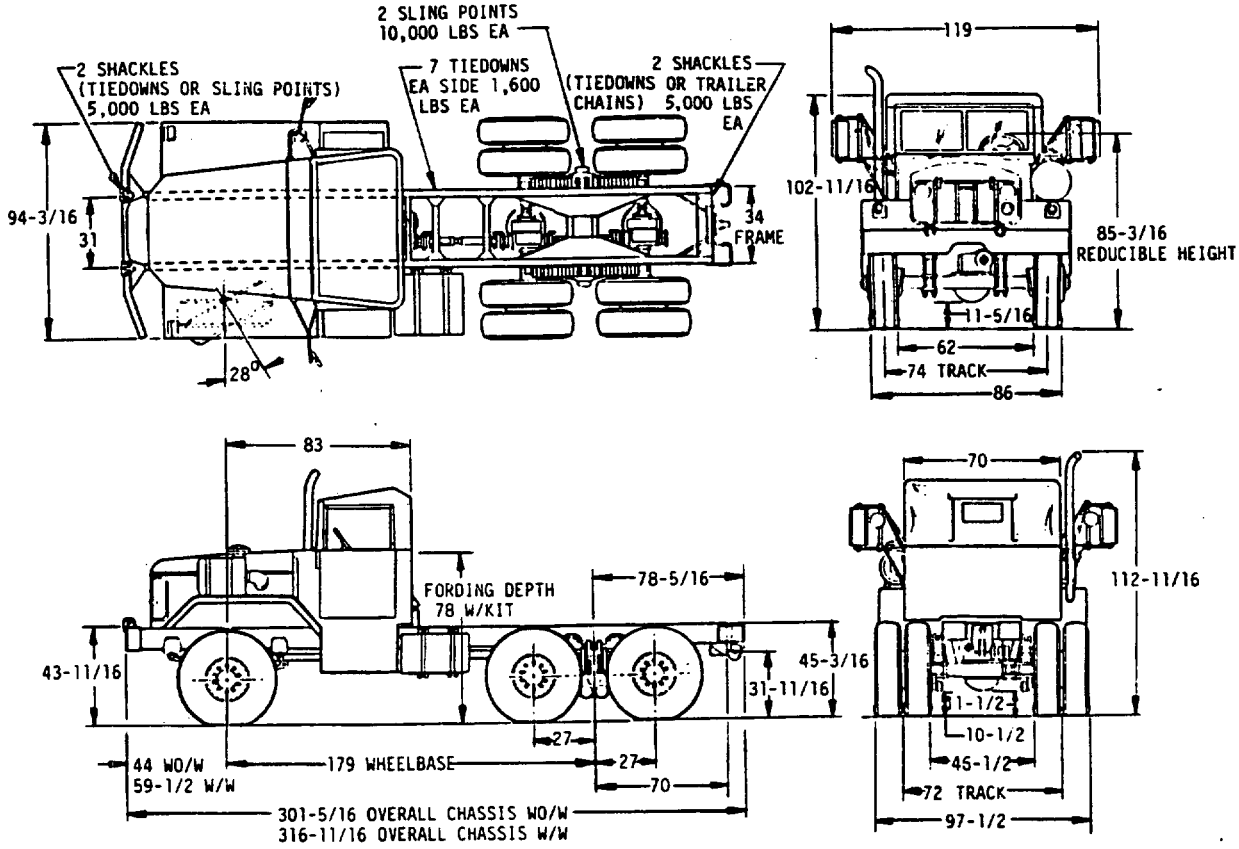

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

MS PART NO.	ENGINEERING DWG NO.	
MS52173-1	8736849	WITH WINCH
MS52173-2	8736850	LESS WINCH

APPROVED 3 MAY 85 REVISED (A) 13 FEB 1989

P. A. ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK: 5 TON, 6x6, M809	MILITARY STANDARD MS52173(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
2320-A392

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AMSC N/A

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22:22
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND CREW	W/O/W	W/W
FRONT	9,005 LBS	9,790 LBS
REAR	9,270 LBS	9,150 LBS
TOTAL	18,275 LBS	18,940 LBS

PAYLOAD: (MAX INCLUDING BODY) 12,500 LBS 12,500 LBS

TOWED LOAD ALLOWANCE: 15,000 LBS 15,000 LBS

SHIPPING DIMENSIONS:		
CUBIC FEET	1,449	1,522
SQUARE FEET	204	214

ANGLE OF APPROACH: (LOADED) 44° 33°

ANGLE OF DEPARTURE: (LOADED) 25° 25°

ANGLE OF BREAKOVER: (LOADED) 37° 37°

MINIMUM TURNING RADIUS: (WALL TO WALL) 488-9/16 507-5/8

FORDING DEPTH: WITH KIT 78 LESS KIT 30

ENGINE: 11664325-1
6 CYL IN-LINE
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 855 CU IN
BORE AND STROKE 5.5 X 6
COMPRESSION RATIO 15.8:1 FUEL DIESEL
OCTANE/CETANE #40
HORSEPOWER; GROSS 240 @ 2100 RPM
NET 210 @ 2100 RPM
TORQUE GROSS; 658 LB FT @ 1500 RPM
NET; 600 LB FT @ 1500 RPM
CRANK CASE CAPACITY; W/O FILTER 24 QTS
W/FILTER 28 QTS
GOVERNOR; TYPE AUTOMATIC
COOLING SYSTEM CAPACITY; 37-1/2 QTS
PUMP TYPE DRIVE 2 V BELTS
GOVERNED SPEED; 2100 RPM AT FULL LOAD

FUEL SYSTEM: FUEL TANK CAPACITY - 78 GALS
FUEL PUMP, IN TANK; FUEL INJECTION.

CLUTCH: TYPE SINGLE DRY DISC DIA 15
EFFECTIVE AREA 70.2 SQ IN
PRESSURE PLATE 8735507
DRIVEN MEMBER 11664387

TRANSMISSION: MANUAL 8333627-1
NO OF SPEEDS - 5 FWD, 1 REV; RATIOS;
1ST - 6.07; 2ND - 3.40; 3RD - 1.79;
4TH - 1.00; 5TH - .78; REV. - 6.09
PTO OPENINGS 2 SAE 6 BOLT, EACH SIDE
OF TRANSMISSION. LUBRICANT CAPACITY;
W/PTO 11 QTS; WO PTO 9 QTS.

TRANSFER CASE: WO/PTO 7748580
NO. OF SPEEDS 2 FRONT; HIGH - 1.07:1
LOW - 2.16:1, REAR; HIGH - 1.00:1,
LOW - 2.02:1 CONTROL OF FRONT AXLE
DRIVE, AUTOMATIC OVERRUNNING, LUB-
RICANT CAPACITY 7 QTS ONE PTO OPENING.

PINTLE: MS51117-1
MAX. VERTICAL LOAD (STATIC) 1,500 LBS

BRAKES: PARKING TYPE INTERNAL/EXTERNAL
DRUM SIZE 14 DIA X 3 WIDE
EFFECTIVE AREA 68 SQ IN

AXLES: FRONT; 11664273
REAR; 8758346
QTY 2, TYPE SINGLE SPEED, DOUBLE REDUC-
TION RATIO 6.443:1, LUBRICANT CAPACITY
12 QTS EACH

FRAME: 11664500
TYPE RAIL CHANNEL SIDE RAIL DIMENSIONS
9 X 3 X 5/16 SECTION MODULUS 10.71 CU IN
NO. OF CROSSMEMBERS 6

FRONT SPRINGS: 7411110
3 WIDE X 50 LONG; NO OF LEAVES 12; RATE
2,271 LB/IN; TYPE SEMI-ELLIPTICAL;
SHOCK ABSORBERS DIRECT ACTING, QTY 2.

REAR SPRINGS: 7409613
SIZE 4 WIDE X 59-1/4 LONG NO. OF LEAVES
13, RATE 5,983 LB/IN; TYPE SEMI-ELLIPTICAL
INVERTED, QTY 2

TIRES W/FLAP AND TUBE: MIL-T-12459
SIZE 11.00 X 20 LOAD RATING F
TREAD DESIGN NDCC NO. OF SPARES 1
TUBE ZZ-I-550

WHEELS: TYPE STEEL DISC, 7388820
SIZE 20 DIA X 7-1/2 WIDE RING 7389061
FRONT SINGLE, REAR DUAL, OFFSET 6-3/4

BRAKES: SERVICE, TYPE AIR ASSISTED
HYDRAULIC, INTERNAL EXPANDING DRUM
SIZE 16-1/2 X 5-1/2, EFFECTIVE AREA
FRONT 339 SQ IN REAR 678 SQ IN

ELECTRICAL SYSTEM: WATERPROOFED, RADIO
SUPPRESSED PER MIL-STD-461.
POTENTIAL 24 V STARTING MTR MS53011-1
ALTERNATOR 10929868
RATING 60 AMP; DRIVE 2 V BELTS
BATTERIES; QTY 4 TYPE 12V 6TN MS35000-3
TRAILER COUPLING SOCKET 7363002
TURN SIGNAL; SOLID STATE FLASHER
11613631
CONTROL 11613632
LIGHTING; HEADLAMPS 8741462
B.O. DRIVING LAMP 8747988
COMPOSITE LAMPS; FRONT 11614156
REAR 11614157

PERFORMANCE: APPROX 4.4 MILES PER GALLON
350 MILES CRUISING RANGE GRADEABILITY;
WITH GVW OF 31,840 LBS 4TH GEAR 3.9%
1ST 60% MAXIMUM SPEED 52 MPH AT ENGINE
GOVERNED SPEED 2100 RPM
W/DIESEL FUEL, TYPE VV-F-800

CAB: TYPE STD CANVAS; ARCTIC HARDTOP
KIT; CAPACITY 2.

WINCH: CAPACITY 9,500 LBS 7412382
WIRE ROPE CABLE 0.6 IN DIA CABLE LENGTH
200 FT

STEERING: TYPE HYD W/POWER ASSIST;
RATIO 23.4:1 11664535

TIEDOWNS: 16 W/W, 8 EACH SIDE 10883223
14 WO/W 7 EACH SIDE;
2 FRONT LIFTING SHACKLES 12301040
2 REAR SHACKLES 7409523

ACCESSORY/SUPPLEMENTAL KITS: 12300925

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZED LIST ITEMS
12300998

Ⓐ INACTIVE FOR NEW DESIGN AFTER 13 FEBRUARY 1989.
FOR NEW DESIGN USE MS52301(AT).

MS PART NO.	ENGINEERING DWG NO.	
MS52173-1	8736849	WITH WINCH
MS52173-2	8736850	LESS WINCH

APPROVED 3 MAY 85 REVISED Ⓐ 13 FEB 1989

P. A. ARMY - AT
Other Cust

INTERNATIONAL INTEREST

TITLE
CHASSIS, TRUCK:
5 TON, 6x6, M809

MILITARY STANDARD
MS52173(AT)

PROCUREMENT SPECIFICATION
MIL-T-740

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2320-A392

USER ACTIVITIES:

REVIEWER ACTIVITIES:

AHSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.