

FED. SUP CLASS
2540

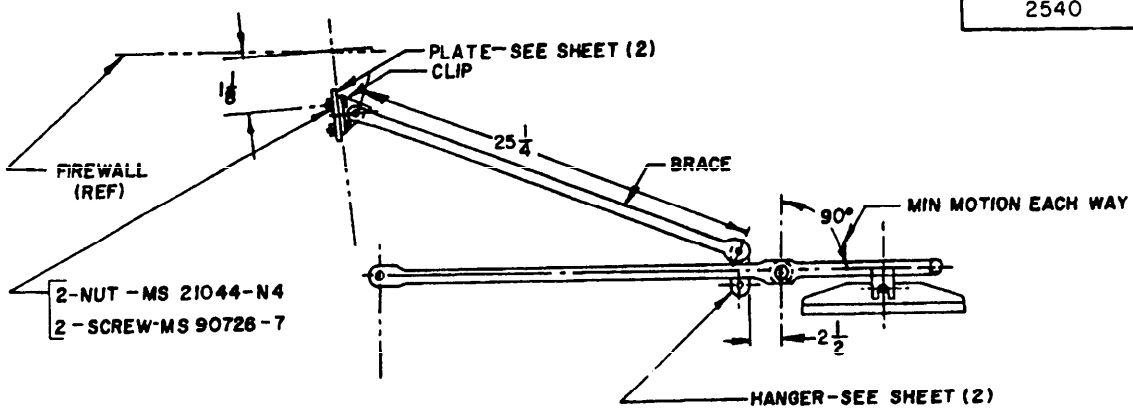

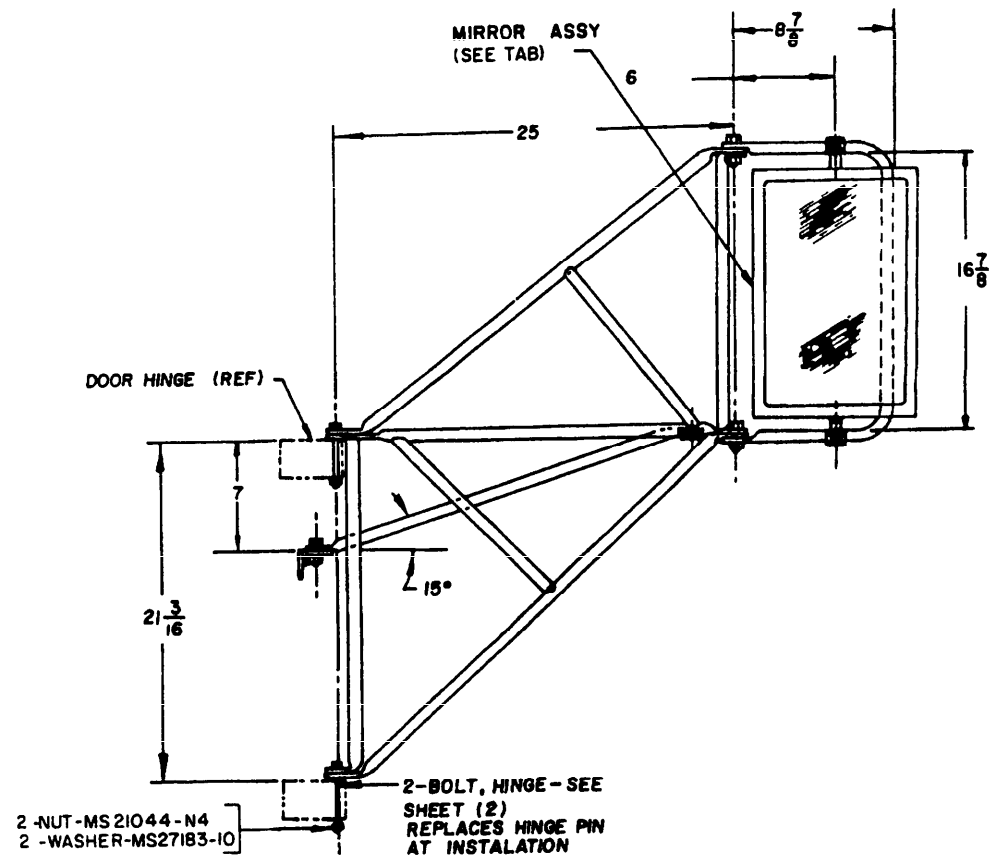

Ⓒ

MS53016 DASH NO.	ARMY DRAWING NO.	MIRROR ASSY NO.	POSITION
-1	7018838	MS53015-2	RIGHT HAND
-2	7018839	MS53015-2	LEFT HAND
-3	7018838*	MS53015-3	RIGHT HAND
-4	7018839*	MS53015-4	LEFT HAND

MS53016-1 SHOWN

Ⓒ DENOTES CHANGE

* EXCEPT USE MS53015-3 AND -4 AS REQUIRED.

APPROVED 28 JUNE 1962 REVISED (A) 17 MAY 1966 (B) 24 JULY 1969 (C) 26 MARCH 1979

REVIEW ACTIVITIES: DLA-CS
USER ACTIVITIES: AFIMY-ME; NAVY-MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. ARMY-AT	TITLE	MILITARY STANDARD
Other Cust AF-99	MIRROR AND BRACKET ASSEMBLY, REARVIEW	MS53016
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2


DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


2540-0270


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2540

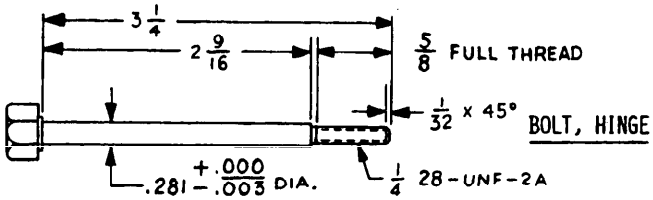



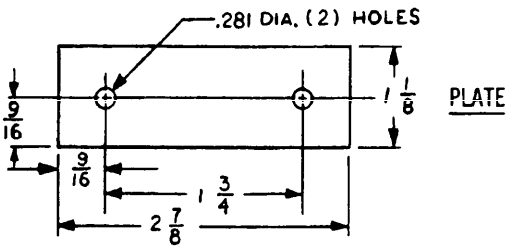

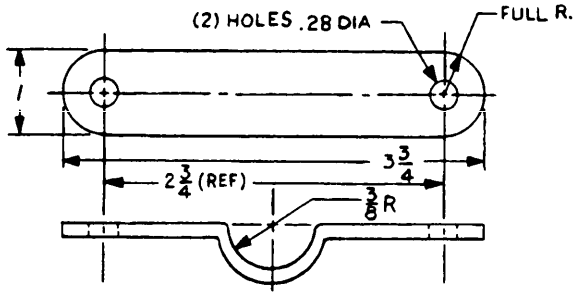

HANGER (ALTERNATE)

REQUIREMENTS:

© 1. MATERIALS:

A. TUBING FOR BRACKET ASSEMBLY: STEEL, CARBON, SEAMLESS, ANNEALED OR WELDED, .750 O.D. X .065 MIN WALL, QQ-T-830.

B. BOLT: STEEL, CARBON, FF-B-575, TYPE II, GRADE 5.

C. REMAINING PARTS: STEEL, CARBON, STRIP, H.R., P. & O., OR C.R., 1009-1020, .125 THICK, QQ-S-698 TEMPER OPTIONAL.

2. PROTECTIVE FINISH:

A. BOLT: CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3.
OPTIONAL: ZINC PLATE, QQ-Z-325, TYPE II, CLASS 3.

B. ALL OTHER PARTS AND EXPOSED SURFACES: PREPARATION TREATMENT, TT-C-490, TYPE I OR III: PRIME, TT-P-636; ENAMEL, OLIVE DRAB OR BLACK, AS SPECIFIED IN CONTRACT, TT-E-529 OR TT-E-485.

3. BRACKET ASSEMBLY SHALL BE WELDED IN ACCORDANCE WITH MIL-STD-1261, CLASS 1 OR MIL-W-12332.

4. REMOVE ALL BURRS AND SHARP EDGES.

5. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

6. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED. TOLERANCES ARE ±1/32 ON FRACTIONS, ± .01 ON DECIMALS, AND ±1° ON ANGLES.

7. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

© NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.

3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE ON INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 28 JUNE 1962 REVISED © FOR CHANGES SEE SHEETS 1-2

P.A. Other Cust	TITLE MIRROR AND BRACKET ASSEMBLY, REARVIEW	MILITARY STANDARD MS53016
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.