
METRIC

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, SLOTTED, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63477.

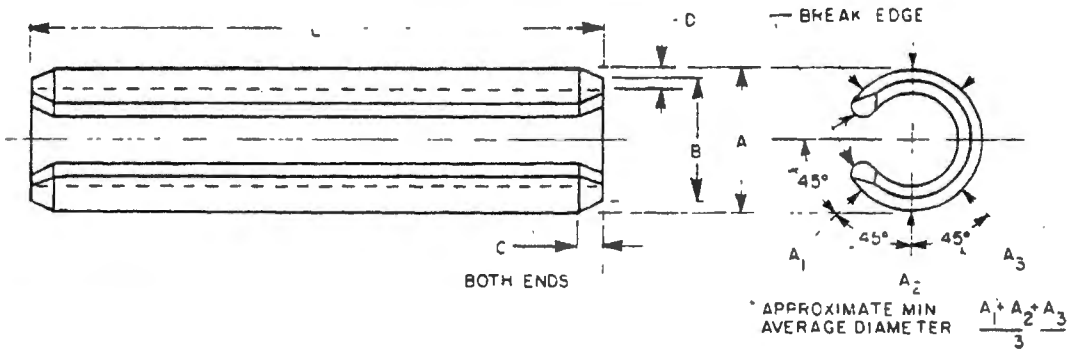

NOTE:

Unless otherwise specified, dimensions are in millimeters.

FIGURE 1. Pin, spring, tubular, slotted.

REQUIREMENTS

1. Material: Carbon steel, 1070 thru 1095.
2. Protective finish: Plain (code N); Cadminum Plating (code C); Phosphate Coating (code P); Zinc Coating (Code Z).
3. Part number: Consists of the letter "D" the basic number of this specification sheet, the dash number taken from table I and a finish code identifier.

Example: D63477/1-33N

- finish code identifier
- dash number
- specification sheet number

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Nominal size		1.5	2	2.5	3	4	5	6	8	10	12
A Diameter	max	1.68	2.20	2.72	3.25	4.28	5.33	6.36	8.40	10.43	12.48
	min	1.60	2.12	2.63	3.15	4.15	5.17	6.20	8.22	10.25	12.28
B Chamfer diameter	max	1.4	1.9	2.4	2.9	3.9	4.8	5.8	7.8	9.7	11.7
C Chamfer length	max	0.70	0.80	0.90	1.00	1.20	1.40	1.60	2.00	2.40	2.80
	min	0.15	0.20	0.20	0.20	0.30	0.30	0.40	0.40	0.50	0.60
D Thickness	ref	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.6	2.0	2.5
Recommended hole size	max	1.57	2.07	2.58	3.10	4.10	5.12	6.13	8.15	10.15	12.18
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00
Min double shear force (kN)		1.7	3.0	4.4	7.1	13.2	20.3	29.2	52.8	84.0	106.0

L - Length	Tol	Dash numbers									
4	±0.40	3	33								
5	±0.40	4	34	64							
6	±0.40	5	35	65	95						
8	±0.40	6	36	66	96	126					
10	±0.40	7	37	67	97	127	157				
12	±0.40	8	38	68	98	128	158	188			
14	±0.40	9	39	69	99	129	159	189			
16	±0.40	10	40	70	100	130	160	190	220		
18	±0.40	11	41	71	101	131	161	191	221		
20	±0.40	12	42	72	102	132	162	192	222	252	
25	±0.40	13	43	73	103	133	163	193	223	253	283
30	±0.50		44	74	104	134	164	194	224	254	284
35	±0.50		45	75	105	135	165	195	225	255	285
40	±0.50		46	76	106	136	166	196	226	256	286
45	±0.50			77	107	137	167	197	227	257	287
50	±0.50				108	138	168	198	228	258	288
55	±0.60					139	169	199	229	259	289
60	±0.60					140	170	200	230	260	290
65	±0.60							201	231	261	291
70	±0.60							202	232	262	292
75	±0.60							203	233	263	293
80	±0.75								234	264	294
90	±0.75								235	265	295
100	±0.75								236	266	296

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - ER, MI
DLA - IS
NSA-NS

User activities:
Army - AV, CE, ME
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5315-0320)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.