MILITARY SPECIFICATION

LUBRICANT, CLEANER AND PRESERVATIVE
FOR WEAPONS AND WEAPONS SYSTEMS

THIS AMENDMENT FORMS A PART OF MIL-63460D, DATED 5 AUGUST 1985, AND IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PAGE 2

2.1.1, SPECIFICATIONS, MILITARY: Add the following military specifications:

| | |
|---|---|
| "MIL-P-51408 | - Paper, Chemical Agent Detector, VGH, ABC-M8 |
| MIL-P-51493 | - Paper, Chemical Agent Detector: M9" |
| MIL-P-51518 | - Paper, Chemical Agent Detector, M9" |

STANDARDS MILITARY: Change the title of MIL-STD-290 to "Packaging of Petroleum and Related Products."

PAGE 3

2.2: After listing of "ASTM A109" include "ASTM D56 - Flash Point by Tag Closed Tester".

Change title of "ASTM D97" to "Pour Point of Petroleum Oils."

Delete reference to "ASTM D3278 - Flash Point of Liquids by Setaflash Closed Tester."

Change title of "ASTM D4057" to "Manual Sampling of Petroleum and Petroleum Products."

PAGE 4

3.2.1, line 1: DELETE "FORMUTATION" and SUBSTITUTE "FORMULATION".

PAGES 4 AND 5

3.4: DELETE entire paragraph.



AMSC N/A FSC 9150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

PAGE 6

3.13: DELETE paragraph and SUBSTITUTE:

"3.13 WORKMANSHIP. After shaking until all visible residue has been removed from the bottom of a translucent unit container, but for a period of time not to exceed 30 seconds, CLP shall be uniform in color and appearance when examined in reflected light. Failure of residue on bottom of container to disperse after shaking container for 30 seconds shall be cause for rejection."

PAGE 7

4.3.2: DELETE reference to "D1477" and SUBSTITUTE "D4177".

PAGE 9

TABLE II: DELETE "D3278" and INSERT "D56"

TABLE II, NOTE 2/, line 6: DELETE reference to "milipore" and SUBSTITUTE "pore diameter".

4.7, line 6: DELETE "naptha" and SUBSTITUTE "naphtha".

PAGE 10

4.8: DELETE entire paragraph

4.9, line 1: DELETE "5 ± .05 grams (.1g precision)" and SUBSTITUTE "5.0 ± .5 grams".

line 19: DELETE "75cc" and SUBSTITUTE "75ml".

PAGE 11

4.10, line 8 (after list of metals): DELETE "naptha" and SUBSTITUTE "naphtha".

PAGE 13

4.13, line 2: DELETE "naptha" and SUBSTITUTE "naphtha".

PAGE 14

4.16, first sentence: CHANGE to read "This test shall be conducted using three different 3 inch strips each of ABC M8, per MIL-P-51408, and M9, per MIL-P-51492 or MIL-P-51518, Chemical Agent Detector Papers".

4.18.1, line 6: DELETE "naptha" and SUBSTITUTE "naphtha".



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

PAGE 16

Insert new "SECTION 5" paragraphs as follows:

"5.1.1 Container Color. All containers of CLP shall be translucent high density polyethylene.

5.1.2 Bottle, 0.5 oz. When the unit container specified is of the 0.5 oz size, the bottle material and dimensions shall conform to Figure 2.

5.1.2.1 Container Integrity. After shaking container in conformance to 3.13, containers shall show no evidence of leakage. Containers shall show no evidence of leakage either before or after initial use i.e., after using the CLP and securing cap, container shall show no evidence of leakage after shaking.

PAGES 16 AND 17

6.3, lines 10 and 11. CHANGE address of activity responsible for the Qualified Products List to "U.S. Army Armament Research, Development and Engineering Center, ATTN: SMCAR-ESC-S, Picatinny Arsenal, NJ 07806-5000".

PAGE 17

6.6: DELETE reference to "9150-01-079-6123" and "1.1 fl oz plastic bottle IAW drawing", and INSERT in place "9150-01-102-1473" and "0.5 oz plastic bottle (See Figure 2)".



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

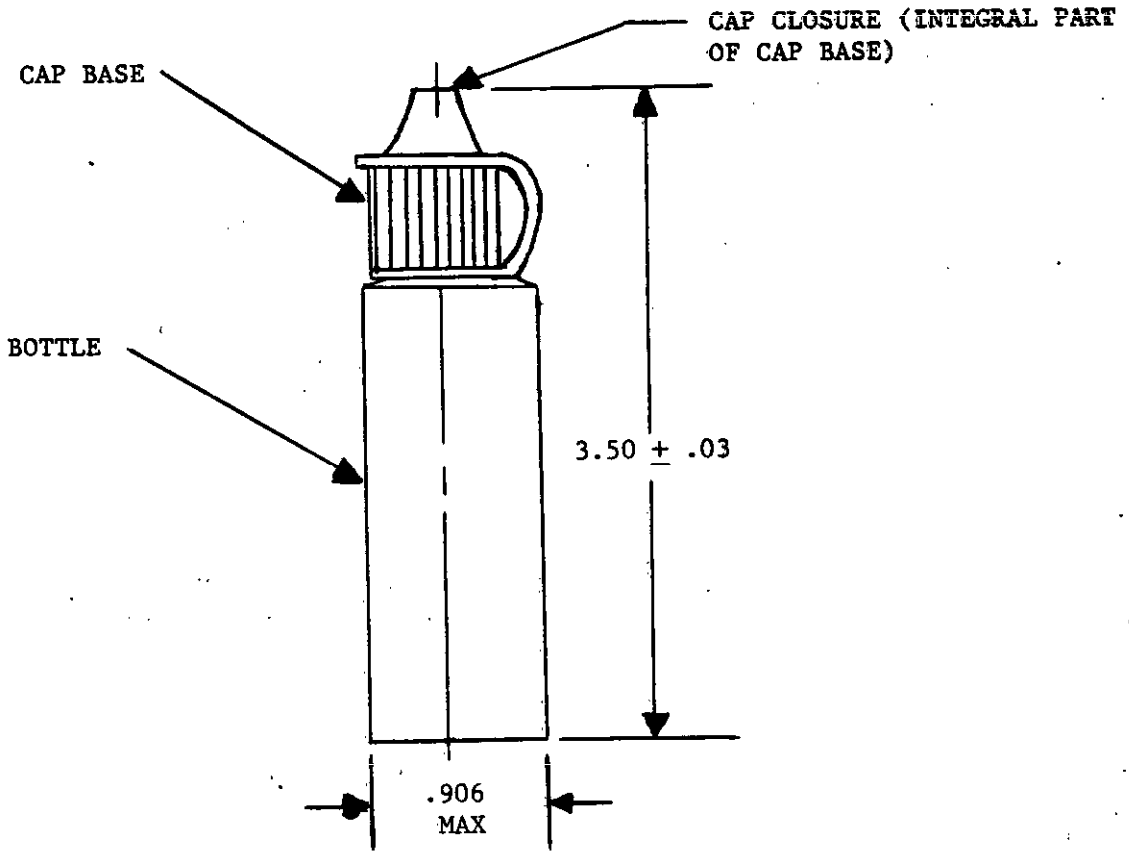



FIGURE 2. BOTTLE, 0.5 OZ CYLINDRICAL

NOTES:

1. Plastic, Polyethylene, Type I, Class H, Grade 2, Translucent, per L-P-390.

2. Bottle shall have a minimum capacity after oven drying of .68 fluid ounces when filled to overflow.

3. Thread shall be free from flash, rough parting lines and other defects which will interfere with proper sealability.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

AMENDMENT 3

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous amendment.

Custodians:
Army - AR
Navy - AS
Air Force - 20

Review activities:
Army - ME, MD, SM
Air Force - 68
DLA - GS

Preparing Activity:
Army - AR

(Project No. 9150-1005)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.