MILITARY SPECIFICATION

SWITCH, INERTIA, MARK 104 MOD 1

(For Torpedo Mark 46 Mods 0 through 5)

This amendment forms a part of Military Specification MIL-S-81031B(OS) of 18 December 1967, and is approved for use within the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

* Wherever appearing in the specification, delete "Naval Ordnance Systems Command" and substitute "Naval Sea Systems Command".

* Wherever appearing in the specification, delete "cycles per second" and substitute "Hertz"; delete "cps" and substitute "Hz".

PAGE 1

* Title, delete and substitute: "SWITCH, INERTIA, MARK 104 MOD 1 (For Torpedo Mk 46 Mods 0 through 5)".

1.1, delete "Mk 104 Mod 0" and substitute "Mk 104 Mod 1".

* Add the following at the bottom center of the page:

"Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization/Documentation Division (Code 524), Indian Head, MD 20640-5000 by using the self-addressed Standardization Documentation Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter."

PAGE 13

4.5.2.5.1, line 5, delete "(except do not conduct 4.7.2)" and substitute "(except for tests 4.7.2 and 4.7.5 which shall not be conducted)".

4.5.2.5.2, line 5, delete "(except do not conduct 4.7.2)" and substitute "(except for tests 4.7.2 and 4.7.5, which shall not be conducted)".

FSC 1355
DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Encl (1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

PAGE 14

Table VIII, delete and substitute:

"Table VIII

Test	Sample and Test Sequence 1, 4, etc.	2, 5, etc.	3, 6, etc.
Vibration (4.5.2.1)	1*		1*
Acceleration (4.5.2.3)		1*	2*
Shock (4.5.2.2)	2*		3*
Temperature & Humidity (ready non-operating) (4.5.2.4)		2	4
Hi-Temperature (operate) (4.5.2.5.2)	3		5
Lo-Temperature (operate) (4.5.2.5.1)		3	6
Vibration Sensitivity (4.5.3)		4	7
Shock Sensitivity (4.5.4)	4	5	8
Final Acceptance (4.7, but excluding 4.7.2)	5	6	9

*Visual check after testing"

PAGE 15

* 4.7.2(a), delete and substitute:

"4.7.2(a) Turn on the oscilloscope, 10 volt dc power supply, and 15 volt dc power supply. Short circuit TB2 to TB5 and operate the centrifuge at an average test rpm (80 to 100)."

PAGE 18

* 5, delete and substitute:

"PACKAGING"

PAGE 19

6.1.1, line 1, delete "Switch Mk 104 Mod 0" and substitute "Switch Mk 104 Mod 1".

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

FIGURE 3, delete and substitute:

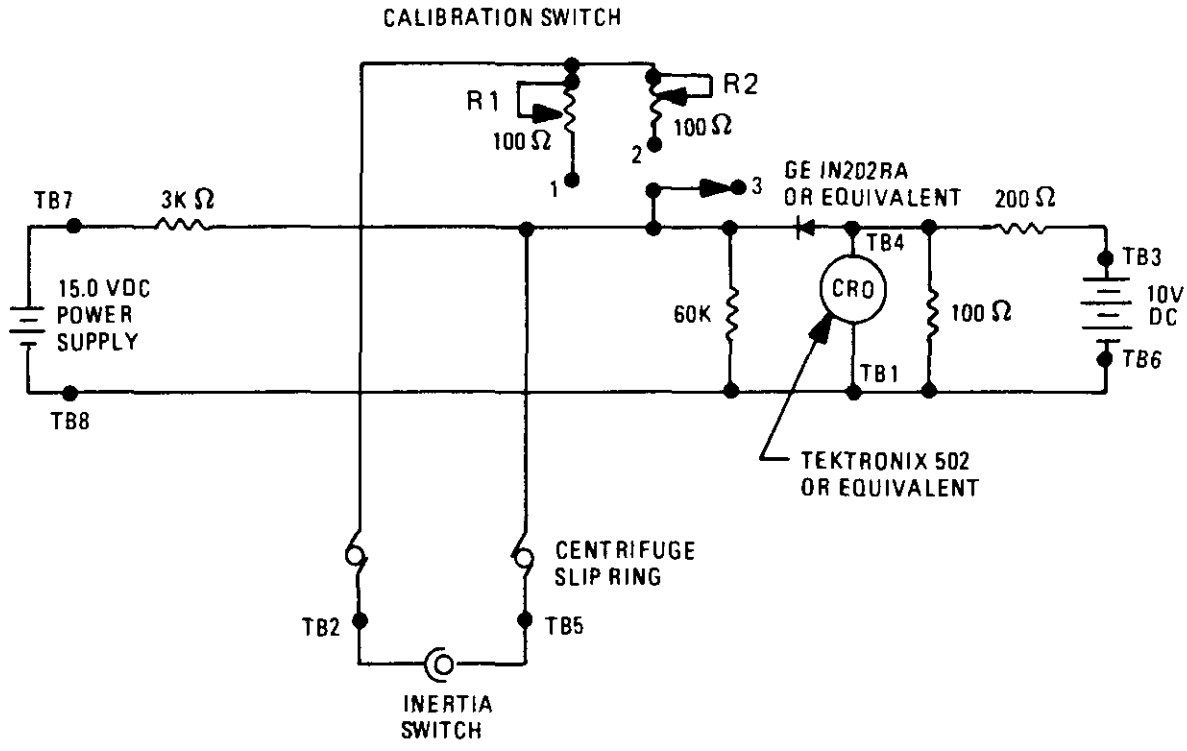


FIGURE 3. SENSITIVITY AND CONTACT RESISTANCE TEST CIRCUIT
(10 VOLT OPEN SWITCH POTENTIAL)

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing Activity
Navy - OS
Project No. 1355-N464

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.