[INCH–POUND]
A–A–59590/3C
3 October 2010
SUPERSEDING
A–A–59590/3B
7 April 2006


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .225 X .260 INCH BODY SIZE, WITH VISUAL LOCK INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59590.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

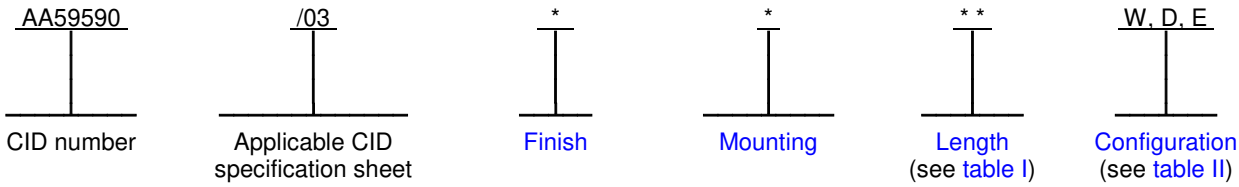

Example: AA59590/03EK63 is the PIN for a nickel finished, 6.3 inch (160.0 mm) long card holder with a retained actuating screw. The card holder also has three counterbored through holes for use with rivet fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly firmly in its installed position. When the card holder is installed properly, it is capable of withstanding 60g/6ms of shock, 25 G–rms of vibration, and provides from 2 to 4 degrees C/W/inch thermal resistance transfer between the circuit card assembly and the heat sink surfaces.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59590.


Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified on figures 1, 2, 3, 4, in table I, and A–A–59590.

Visual lock indicator (see figure 2). Card holders shall have a visual indicator to show when the card holder is in its relaxed (unlocked) state. When the card holder is in the unlocked (relaxed) state, the actuating end of the screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened (assembly expanded) so that the assembly is in the locked position, this red band shall be concealed.

Actuating screw hex drive socket. The across flats dimension for the hex drive socket shall be as follows: .094 inch (2.38 mm) for mounting options "J", "K", "N", "T", "R", "V", and "S" and 2.5 mm (0.098 inch) for mounting options "G" and "M".

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be as follows: 6 inch-pounds (0.68 N-m) for assemblies using no options or option "W" and 7.2 inch-pounds (0.81 N-m) for assemblies using options "E" or "D".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

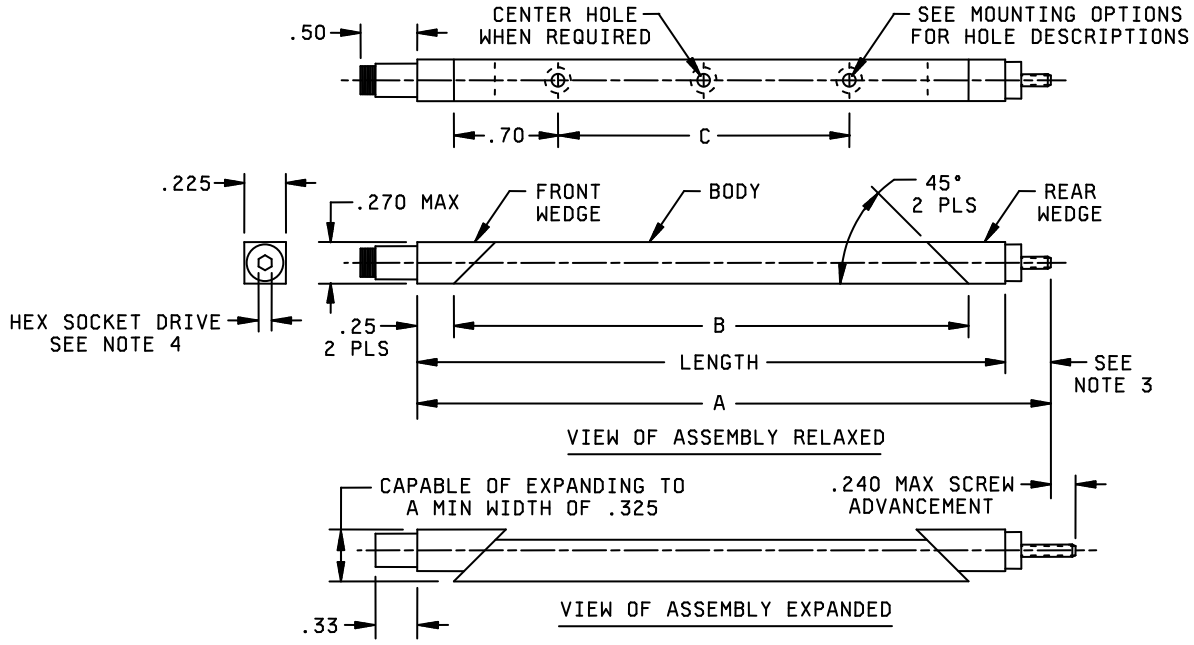

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.20	5.1	.240	6.1	.270	6.9	.33	8.4	.70	17.8
.225	5.7	.25	6.4	.325	8.3	.50	12.7		

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Dimension shall be .20 (5.1 mm) maximum on card holders without option "W" or "D" and .30 (7.6 mm) maximum on card holders with option "W" or "D".
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm) for mounting options "J", "K", "N", "T", "R", "V", and "S". The across flats dimension for hex drive socket shall be a metric dimension of 2.5 mm (.098 inch) across flats for mounting options "G" and "M".

FIGURE 1. Relaxed and expanded dimensions.

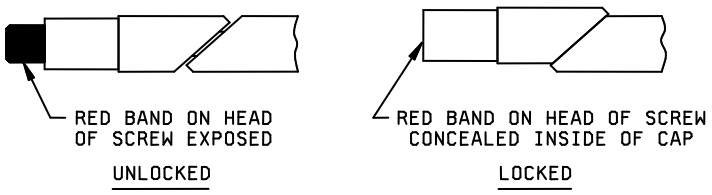


FIGURE 2 Visual lock indicator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE I. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension "LENGTH" ±.02 (0.5)	Dimension "A" +.02 / –.09 (+0.5 / –2.3)		Dimension "B" ±.03 (0.8)	Dimension "C" ±.005 (0.13)
		Without options "W" or "D"	With options "W" or "D"		
18	1.8 (45.7)	2.20 (55.9)	2.30 (58.4)	1.30 (33.0)	.75 (19.1)
23	2.3 (58.4)	2.70 (68.6)	2.80 (71.1)	1.80 (45.7)	.40 (10.2)
28	2.8 (71.1)	3.20 (81.3)	3.30 (83.8)	2.30 (58.4)	.90 (22.9)
30	3.0 (76.2)	3.40 (86.4)	3.50 (88.9)	2.50 (63.5)	1.10 (27.9)
33	3.3 (83.8)	3.70 (94.0)	3.80 (96.5)	2.80 (71.1)	1.40 (35.6)
35	3.5 (88.9)	3.90 (99.1)	4.-0 (101.6)	3.00 (76.2)	1.60 (40.6)
38	3.8 (96.5)	4.20 (106.7)	4.30 (109.2)	3.30 (83.8)	1.90 (48.3)
43	4.3 (109.2)	4.70 (119.4)	4.80 (121.9)	3.80 (96.5)	2.40 (61.0)
48	4.8 (121.9)	5.20 (132.1)	5.30 (134.6)	4.30 (109.2)	2.90 (73.7)
53	5.3 (134.6)	5.70 (144.8)	5.80 (147.3)	4.80 (121.9)	3.40 (86.4)
55	5.5 (139.7)	5.90 (149.9)	6.00 (152.4)	5.00 (127.0)	3.60 (91.4)
58	5.8 (147.3)	6.20 (157.5)	6.30 (160.0)	5.30 (134.6)	3.90 (99.1)
61	6.1 (154.9)	6.50 (165.1)	6.60 (167.6)	5.60 (142.2)	4.20 (106.7)
63	6.3 (160.0)	6.70 (170.2)	6.80 (172.7)	5.80 (147.3)	4.40 (111.8)
67	6.7 (170.2)	7.10 (180.3)	7.20 (182.9)	6.20 (157.5)	4.80 (121.9)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Cold plate slot width dimensions. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Finish. The finish designator shall be as specified in A–A–59590. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "E" (electroless nickel), "H" (hard black anodize), and "R" (clear chemical film).

Mounting options. The mounting designators shall be as specified in A–A–59590. The mounting options available for this CID specification sheet are as follows: "J" (rivet mounting holes), "N" (no mounting holes), "R" or "T" (tapped 0–80 UNF 2B holes), "V" or "S" (tapped 2–56 UNC 2B holes), or "G" or "M" (tapped M2.5 x.45 metric holes). Card holders using mounting option "J" may be shipped unassembled. See figure 1 and table I for mounting hole spacing requirements.

Mounting holes (when required). Two mounting holes are required on card holders less than 5.30 inches (134.6 mm) in length. Three mounting holes are required on card holders 5.30 inches (134.6 mm) or greater in length. The third mounting hole shall be centered on the mounting body. See figure 1 and table I for mounting hole locations and spacing requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Rivet mounting holes. The holes used for rivet mounting shall be .066 to .073 inch (1.68 to 1.85 mm) diameter through holes, countersunk 100 degrees by .140 inch (3.56 mm) diameter with an access/clearance counterbore hole of .156 inch (3.96 mm) diameter by .200 inch (5.08 mm) deep.

Rivets. This card holder uses rivet style B as specified in A–A–59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A–A–59590 and the available lengths for this specification sheet are listed in table I.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figures 1, 2, 3,and 4. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configurations.

Configuration	Applicable figures	Hardware options
---	1 and 2	No added options
W	1, 2, and 3	Lockwasher and flat washer
E	1, 2, and 4	Screw self-locking element
D	1, 2, 3, and 4	Lockwasher, flat washer and screw self-locking element

Lockwasher and flat washer (see figure 3). A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flat washer shall include a configuration suffix "W" in the PIN (see classification and notes).

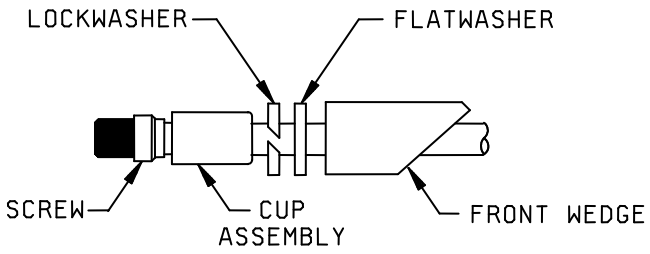


FIGURE 3. Lockwasher and flat washer details.

Screw self-locking element (see figure 4). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock and vibration. Card holders requiring a screw self-locking element shall include a configuration suffix "E" in the PIN (see classification and notes).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

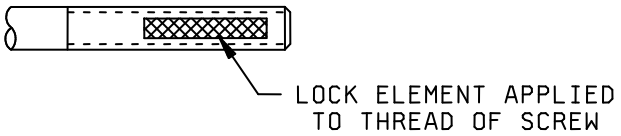


FIGURE 4. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element option shall include a configuration suffix "D" in the PIN (see classification and notes).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59590 – Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or https://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data is as specified in A–A–59590.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher – A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 (URL): www.birtcherproducts.com
61081	Calmark – A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 Electronic mail: sales@calmark.com URL: www.calmark.com
5BG68	Card Locks Unlimited, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@clumfg.com URL: www.clumfg.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Part number supersession data. This CID specification sheet part numbers supersede the following manufacturer's part numbers in table III and on DESC Drawing 84103 (table IV) as shown. The CID PINs listed in table III are only for length designator "28". See table V for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59590/03	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28	40VI–6–B	VA225CR2.80H	3225VBA–2.80H
BN28	40VI–6–B–A	VA225CR2.80	3225VBA–2.80
BT28	40VI–6–B–T	VA225CR2.80T0	3225VBA–2.80T0
BV28	40VI–6–B–S	VA225CR2.80T2	3225VBA–2.80T2
BG28	40VI–6–B–M	MVA225CR2.80TM2.5	3225MVBA–2.80TM2.5
BJ28E	40VI–6–B–L	VA225CR2.80HL	3225VBA–2.80HL
BN28E	40VI–6–B–A–L	VA225CR2.80L	3225VBA–2.80L
BT28E	40VI–6–B–T–L	VA225CR2.80T0L	3225VBA–2.80T0L
BV28E	40VI–6–B–S–L	VA225CR2.80T2L	3225VBA–2.80T2L
BG28E	40VI–6–B–M–L	MVA225CR2.80TM2.5L	3225MVBA–2.80TM2.5L
BJ28W	40VI–6–B–LF	WVA225CR2.80H	3225VWBA–2.80H
BN28W	40VI–6–B–LF–A	WVA225CR2.80	3225VWBA–2.80
BT28W	40VI–6–B–LF–T	WVA225CR2.80T0	3225VWBA–2.80T0
BV28W	40VI–6–B–LF–S	WVA225CR2.80T2	3225VWBA–2.80T2
BG28W	40VI–6–B–LF–M	MWVA225CR2.80TM2.5	3225MVWBA–2.80TM2.5
BJ28D	40VI–6–B–LF–L	WVA225CR2.80HL	3225VWBA–2.80HL
BN28D	40VI–6–B–LF–A–L	WVA225CR2.80L	3225VWBA–2.80L
BT28D	40VI–6–B–LF–T–L	WVA225CR2.80T0L	3225VWBA–2.80T0L
BV28D	40VI–6–B–LF–S–L	WVA225CR2.80T2L	3225VWBA–2.80T2L
BG28D	40VI–6–B–LF–M–L	MWVA225CR2.80TM2.5L	3225MVWBA–2.80TM2.5L
CJ28	40VI–6	V225CR2.80H	3225VCG–2.80H
CN28	40VI–6–A	V225CR2.80	3225VCG–2.80
CT28	40VI–6–T	V225CR2.80T0	3225VCG–2.80T0
CV28	40VI–6–S	V225CR2.80T2	3225VCG–2.80T2
CG28	40VI–6–M	MV225CR2.80TM2.5	3225MVCG–2.80TM2.5

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/03	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
CJ28E	40VI–6–L	V225CR2.80HL	3225VCG–2.80HL
CN28E	40VI–6–A–L	V225CR2.80L	3225VCG–2.80L
CT28E	40VI–6–T–L	V225CR2.80T0L	3225VCG–2.80T0L
CV28E	40VI–6–S–L	V225CR2.80T2L	3225VCG–2.80T2L
CG28E	40VI–6–M–L	MV225CR2.80TM2.5L	3225MVCG–2.80TM2.5L
CJ28W	40VI–6–LF	WV225CR2.80H	3225VWCG–2.80H
CN28W	40VI–6–LF–A	WV225CR2.80	3225VWCG–2.80
CT28W	40VI–6–LF–T	WV225CR2.80T0	3225VWCG–2.80T0
CV28W	40VI–6–LF–S	WV225CR2.80T2	3225VWCG–2.80T2
CG28W	40VI–6–LF–M	MWV225CR2.80TM2.5	3225MVWCG–2.80TM2.5
CJ28D	40VI–6–LF–L	WV225CR2.80HL	3225VWCG–2.80HL
CN28D	40VI–6–LF–A–L	WV225CR2.80L	3225VWCG–2.80L
CT28D	40VI–6–LF–T–L	WV225CR2.80T0L	3225VWCG–2.80T0L
CV28D	40VI–6–LF–S–L	WV225CR2.80T2L	3225VWCG–2.80T2L
CG28D	40VI–6–LF–M–L	MWV225CR2.80TM2.5L	3225MVWCG–2.80TM2.5L
EJ28	40VI–6–EN	VEN225CR2.80H	3225VEN–2.80H
EN28	40VI–6–EN–A	VEN225CR2.80	3225VEN–2.80
ET28	40VI–6–EN–T	VEN225CR2.80T0	3225VEN–2.80T0
EV28	40VI–6–EN–S	VEN225CR2.80T2	3225VEN–2.80T2
EG28	40VI–6–EN–M	MVEN225CR2.80TM2.5	3225MVEN–2.80TM2.5
EJ28E	40VI–6–EN–L	VEN225CR2.80HL	3225VEN–2.80HL
EN28E	40VI–6–EN–A–L	VEN225CR2.80L	3225VEN–2.80L
ET28E	40VI–6–EN–T–L	VEN225CR2.80T0L	3225VEN–2.80T0L
EV28E	40VI–6–EN–S–L	VHEN25CR2.80T2L	3225VEN–2.80T2L
EG28E	40VI–6–EN–M–L	MVEN225CR2.80TM2.5L	3225MVEN–2.80TM2.5L
EJ28W	40VI–6–EN–LF	WVEN225CR2.80H	3225VWEN–2.80H
EN28W	40VI–6–EN–LF–A	WVEN225CR2.80	3225VWEN–2.80
ET28W	40VI–6–EN–LF–T	WVEN225CR2.80T0	3225VWEN–2.80T0
EV28W	40VI–6–EN–LF–S	WVEN225CR2.80T2	3225VWEN–2.80T2
EG28W	40VI–6–EN–LF–M	MWVEN225CR2.80TM2.5	3225MVWEN–2.80TM2.5

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/03	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
EJ28D	40VI–6–EN–LF–L	WVEN225CR2.80HL	3225VWEN–2.80HL
EN28D	40VI–6–EN–LF–AL	WVEN225CR2.80L	3225VWEN–2.80L
ET28D	40VI–6–EN–LF–TL	WVEN225CR2.80T0L	3225VWEN–2.80T0L
EV28D	40VI–6–EN–LF–SL	WVEN225CR2.80T2L	3225VWEN–2.80T2L
EG28D	40VI–6–EN–LF–ML	MWVEN225CR2.80TM2.5L	3225MVWEN–2.80TM2.5L
HJ28	40VI–6–B3	VHA225CR2.80H	3225VBH–2.80H
HN28	40VI–6–B3–A	VHA225CR2.80	3225VBH–2.80
HT28	40VI–6–B3–T	VHA225CR2.80T0	3225VBH–2.80T0
HV28	40VI–6–B3–S	VHA225CR2.80T2	3225VBH–2.80T2
HG28	40VI–6–B3–M	MVHA225CR2.80TM2.5	3225MVBH–2.80TM2.5
HJ28E	40VI–6–B3–L	VHA225CR2.80HL	3225VBH–2.80HL
HN28E	40VI–6–B3–A–L	VHA225CR2.80L	3225VBH–2.80L
HT28E	40VI–6–B3–T–L	VHA225CR2.80T0L	3225VBH–2.80T0L
HV28E	40VI–6–B3–S–L	VHA225CR2.80T2L	3225VBH–2.80T2L
HG28E	40VI–6–B3–M–L	MVHA225CR2.80TM2.5L	3225MVBH–2.80TM2.5L
HJ28W	40VI–6–B3–LF	WVHA225CR2.80H	3225VWBH–2.80H
HN28W	40VI–6–B3–LF–A	WVHA225CR2.80	3225VWBH–2.80
HT28W	40VI–6–B3–LF–T	WVHA225CR2.80T0	3225VWBH–2.80T0
HV28W	40VI–6–B3–LF–S	WVHA225CR2.80T2	3225VWBH–2.80T2
HG28W	40VI–6–B3–LF–M	MWVHA225CR2.80TM2.5	3225MVWBH–2.80TM2.5
HJ28D	40VI–6–B3–LF–L	WVHA225CR2.80HL	3225VWBH–2.80HL
HN28D	40VI–6–B3–LF–AL	WVHA225CR2.80L	3225VWBH–2.80L
HT28D	40VI–6–B3–LF–TL	WVHA225CR2.80T0L	3225VWBH–2.80T0L
HV28D	40VI–6–B3–LF–SL	WVHA225CR2.80T2L	3225VWBH–2.80T2L
HG28D	40VI–6–B3–LF–ML	MWVHA225CR2.80TM2.5L	3225MVWBH–2.80TM2.5L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/03	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
RJ28	40VI–6–CC	VR225CR2.80H	3225VCC–2.80H
RN28	40VI–6–CC–A	VR225CR2.80	3225VCC–2.80
RT28	40VI–6–CC–T	VR225CR2.80T0	3225VCC–2.80T0
RV28	40VI–6–CC–S	VR225CR2.80T2	3225VCC–2.80T2
RG28	40VI–6–CC–M	MVR225CR2.80TM2.5	3225MVCC–2.80TM2.5
RJ28E	40VI–6–CC–L	VR225CR2.80HL	3225VCC–2.80HL
RN28E	40VI–6–CC–A–L	VR225CR2.80L	3225VCC–2.80L
RT28E	40VI–6–CC–T–L	VR225CR2.80T0L	3225VCC–2.80T0L
RV28E	40VI–6–CC–S–L	VR225CR2.80T2L	3225VCC–2.80T2L
RG28E	40VI–6–CC–M–L	MVR225CR2.80TM2.5L	3225MVCC–2.80TM2.5L
RJ28W	40VI–6–CC–LF	WVR225CR2.80H	3225VWCC–2.80H
RN28W	40VI–6–CC–LF–A	WVR225CR2.80	3225VWCC–2.80
RT28W	40VI–6–CC–LF–T	WVR225CR2.80T0	3225VWCC–2.80T0
RV28W	40VI–6–CC–LF–S	WVR225CR2.80T2	3225VWCC–2.80T2
RG28W	40VI–6–CC–LF–M	MWVR225CR2.80TM2.5	3225MVWCC–2.80TM2.5
RJ28D	40VI–6–CC–LF–L	WVR225CR2.80HL	3225VWCC–2.80HL
RN28D	40VI–6–CC–LF–AL	WVR225CR2.80L	3225VWCC–2.80L
RT28D	40VI–6–CC–LF–TL	WVR225CR2.80T0L	3225VWCC–2.80T0L
RV28D	40VI–6–CC–LF–SL	WVR225CR2.80T2L	3225VWCC–2.80T2L
RG28D	40VI–6–CC–LF–ML	MWVR225CR2.80TM2.5L	3225MVWCC–2.80TM2.5L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE IV. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84103	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84103	Superseding (new) CID PIN
84103–08B	AA59590/03BJ28	84103–08C	AA59590/03CJ28
84103–09B	AA59590/03BJ30	84103–09C	AA59590/03CJ30
84103–10B	AA59590/03BJ35	84103–10C	AA59590/03CJ35
84103–11B	AA59590/03BJ38	84103–11C	AA59590/03CJ38
84103–12B	AA59590/03BJ48	84103–12C	AA59590/03CJ48
84103–13B	AA59590/03BJ53	84103–13C	AA59590/03CJ53
84103–14B	AA59590/03BJ58	84103–14C	AA59590/03CJ58

TABLE V. Example of PIN with available length designators.

PIN designator AA59590/03	Vendor similar designator or type part number 1/ 2/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
EJ18	40VI–4–EN	VEN225CR1.80H	3225VEN–2.80H
EJ23	40VI–5–EN	VEN225CR2.30H	3225VEN–2.30H
EJ28	40VI–6–EN	VEN225CR2.80H	3225VEN–2.80H
EJ30	3/	VEN225CR3.00H	3225VEN–3.00H
EJ33	40VI–7–EN	VEN225CR3.30H	3225VEN–3.30H
EJ35	3/	VEN225CR3.50H	3225VEN–3.50H
EJ38	40VI–8–EN	VEN225CR3.80H	3225VEN–3.80H
EJ43	40VI–9–EN	VEN225CR4.30H	3225VEN–4.30H
EJ48	40VI–10–EN	VEN225CR4.80H	3225VEN–4.80H
EK53	40VI–11–EN	VEN225CR5.30EH	3225VEN–5.30EH
EK55	3/	VEN225CR5.50EH	3225VEN–5.50EH
EK58	40VI–12–EN	VEN225CR5.80EH	3225VEN–5.80EH
EK61	3/	VEN225CR6.10EH	3225VEN–6.10EH
EK63	40VI–13–EN	VEN225CR6.30EH	3225VEN–6.30EH
EK67	3/	VEN225CR6.70EH	3225VEN–6.70EH

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
2/ Other lengths are available on request.
3/ Consult manufacturer for part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project 5998–2010–033

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.