INCH-POUND

A-A-60004A
30 JUN 2015
SUPERSEDING
A-A-60004
27 AUG 1997

COMMERCIAL ITEM DESCRIPTION

TRUCK, LIFT, PLATFORM, ENGINE-DRIVEN, TELESCOPING BOOM

The General Services Administration has authorized the use of this Commercial Item Description (CID) as a replacement for sizes I, II and III of MIL-M-87973 and types I, II, III, IV and V of MIL-T-29218 for all federal agencies

1. SCOPE. This Commercial Item Description (CID) covers self-propelled personnel, telescopic boom type, aerial work platforms (herein after, referred to as the work platform). The work platform is used for various types of overhead construction and maintenance work.

2. CLASSIFICATION. The primary distinguishing feature of the work platforms is the length of the boom.

2.1 The work platforms shall be of the following types:

Type I	40 foot (12.2 meter (m)) boom
Type II	60 foot (18.3 m) boom
Type III	80 foot (24.4 m) boom
Type IV	90 foot (27.4 m) boom
Type V	100 foot (30.5 m) boom

2.2 Ordering data and defining characteristics (see 7.2).

Comments, suggestions, or questions on this document should be addressed to: WR-ALC/404th SCMS/GUEEA, Robins AFB GA 31098-1813 or email SPEC99@us.af.mil Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.,mil.

AMSC N/A FSC 3930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The work platform shall be hydrostatic drive (see 3.10 and 7.2), gasoline- engine- or diesel-engine-driven, four wheels and two axles, two-wheel-driven type. The work platform shall consist of a telescopic boom, with a basket type enclosed platform. The platform shall be capable of rotating 360 degrees with a 500-pound (lb) 227 kilogram (kg)) rated work load at maximum boom reach, and a chassis. The work platform shall be provided with, but not limited to: a swing brake, chassis brakes, alternating power supply, two-wheel steering, horn, ground work area controls for all platform functions, and forward and reverse speeds.

3.2 Standard Commercial Product. The work platform shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this CID, but which are a part of the manufacturer's standard commercial product, shall be included in the work platform being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

3.4 Safety. An emergency engine shutdown shall be provided for the operator. An electric- driven pump shall be provided to allow emergency use of hydraulic system. All moving parts and all parts subject to high operational temperatures that are of such a nature or so located as to become a hazard to the operating personnel shall be insulated, enclosed, or guarded to the extent necessary to eliminate the hazard. When incorporated by the manufacturer's design, a manual descent valve shall be provided for lowering and retracting boom simultaneously and shall be in easy reach of the ground. All safety and warning devices shall comply with SAIA A92.5 requirements. An alarm shall be installed at the work platform which will be activated automatically when the machine base is more than 5 degrees out of level in any direction. Pilot- operated holding valves shall be provided in the lift cylinders to prevent uncontrolled descent in the event of hose or hydraulic failure.

3.4.1 Fall Arrest System. On occasion, users must leave the basket to walk onto a nearby aircraft or building. When specified (See 7.2), the work platform shall include a fall arrest system as applicable per AFI 91-203, Chapter 13 and OSHA 1910.66 (see 29 CFR Part 1910 Subpart F, Appendix C). The fall arrest system shall allow the operator to safely perform work outside the platform basket.

3.4.2 Wind Stability. When specified (see 7.2), the work platform shall be rated to steady winds of 80 miles per hour (mph) and wind gusts of 90 mph. Wind stability for the platform, shall meet Aerospace Recommended Practice (ARP) SAE ARP1328.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.5 Engine. The manufacturer's standard commercial, gasoline or diesel engine shall be furnished. The engine shall be complete with a 12-volt (V) starting and charging system. An air cleaner shall be provided. The power and speed rating of the engine shall be such that the operation of the work platform under any of the requirements or conditions specified herein will not be greater than the engine manufacturer's published maximum horsepower. A spark arresting muffler shall be provided. The muffler shall direct noise and exhaust fumes away from the operator, however, exhaust noise and fumes shall not effect or interfere with an operator at the ground control panel. The manufacturer's standard commercial storage battery normally furnished to make a complete electrical system shall be furnished. When specified (see 7.2 for required ordering information), batteries furnished shall be dry charged and moisture sealed to prevent intrusion of atmospheric moisture. Electrolyte shall not be furnished.

3.6 Fuel tank. The fuel tank shall have sufficient capacity to operate the work platform for not less than eight hours.

3.7 Steering. The steering shall be of the two-wheel type and shall be controlled from the work platform.

3.8 Chassis Brakes. The work platform shall be provided with automatic spring-applied, hydraulically released brakes on not less than two wheels. The brakes shall be designed to hold the work platform in the maximum grade for which the platform was designed to negotiate.

3.9 Ground Control. A control panel shall be located at the base work platform for ground control operation for all powered functions of the work platform. Ground controls shall be provided for lift, telescopic boom swing, rotation of basket work area, engine off and start, platform/ground control selector switch, and platform leveling or tilting control.

3.10 Chassis Drive. Unless otherwise specified (see 7.2 for required ordering information), the chassis shall be hydrostatically driven. The chassis shall be capable of forward and reverse movement. Type I work platforms shall be self-propelled up to 3 miles per hour (4.83 kilometre per hour (km/h) travel speed. Types II, III, IV, and V shall be self-propelled from 2.5 to 4 miles per hour (4.02 km/h to 6.44 km/h) travel speed.

3.11 Hydraulic System. The main pump shall have a filter and shall be engine driven with an operating pressure as specified by the manufacturer for the type work platform furnished.

3.12 Electrical System. When specified (see 7.2 for required ordering information), an electrical system for work platform electrification shall be provided. An electrical materials shall bear the Underwriters Laboratories (UL) listing mark and be listed in the UL Electrical Construction Materials Directory. All electrical equipment and receptacles shall be connected to a 120V, 60 Hertz, 2-pole, 3-wire, ground, single phase power provided by the manufacturer's standard generator. All wiring and equipment shall be provided with over-current circuit breaker protection. All duplex receptacles shall be hospital grade. All

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

distribution wiring shall be adequately supported and protected with grommets wherever passing through sheet metal, supports, or framework. All receptacles provided with the work platform shall be weatherproof and shall have ground-fault protection. A receptacle shall be provided in the work platform area.

3.13 Outriggers. Outriggers or powered extendible axles may be provided to meet the stability requirements specified herein.

3.14 Wheels and Tires. The work platform shall be mounted on four wheels of the manufacturer's current standard type and size. The tires shall be pneumatic or polyurethane- filled, as specified (see 7.2 for required ordering information). The tires shall have individual rated load capacities equal to the maximum tire loading imposed by the operation. When tube type tires are furnished, tubes shall be of heavy-duty type and shall be of proper size for tires.

3.15 Horn. The work platform shall be equipped with an electrical horn with push button located in the work platform. The horn shall be protected against moisture and adverse weather conditions.

3.16 Platform. The platform shall be hydraulically controlled and shall be elevated by a telescoping boom. The platform shall be automatically self-leveling and shall be able to rotate not less than 160 degrees. The platform shall contain all operating controls to allow the operator to perform all functions. These shall include work platform drive (forward, reverse movement, and braking), platform lift and lower, boom extension and retraction; 360 degrees continuous turntable swings (either direction), and start and stop engine. The platform area shall be provided with emergency shutdown devices, and deadman control that must be depressed before operator control can be activated.

3.16.1 Aircraft protection device. When specified (See 7.2), the work platform shall include an aircraft protection device. The system shall include a proximity sensor as applicable per AFI 91-203, Chapter 16 to halt any platform basket operations in the prevention of any damage to an aircraft.

3.17 Boom. The boom shall be of the telescoping type with a swing of 360 degrees. Rated work load shall be not greater than 500 lb (227 kg). Workloads are rated with work platform positioned on level ground and boom at maximum reach. The boom, when fully extended, shall be capable of reaching a platform height of 40 feet (12.2 m) for type I, 60 feet (18.3 m) for type II, 80 feet (24.4 m) for type III, 90 feet (27.4 m) for type IV, and 100 feet (30.5 m) for type V. The boom shall be provided with a swing brake and shall operate smoothly. The boom shall have 360 degrees continuous turntable swing in either direction. When the rated work load varies according to multiple configurations of the work platform, the manufacturer shall clearly describe these configurations, including the rated work load of each on the work platform.

3.18 Cleaning, Treatment, and Painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. Surfaces to be painted shall be cleaned and dried to ensure that they are free from contaminants such as oil,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

grease, welding slag and spatter, loose mill scale, water, dirt corrosion product, or any other contaminating substances. As soon as practicable after cleaning and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to ensure the adhesion of the coating system. The painting shall consist of at least one coat or primer and one finish coat of acrylic-based or polyurethane enamel. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects. The end item, allied equipment, and attachments shall be the same color.

3.19 Nameplate. A nameplate will be furnished by the contracting officer for each work platform. The contractor shall stamp all necessary data in the blank spaces provided for that purpose and securely affix it to each work platform in a conspicuous place with nonferrous metal screws, bolts, or rivets not less than 0.125-inch (3 millimeter (mm)) in diameter shall be used to affix the plate to the equipment.

3.20 Instruction Plates. The unit shall be equipped with instructions plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the equipment with nonferrous screws or bolts or not less than 0.125-inch (3 mm) in diameter.

3.21 Identification Marking. Identification shall be permanently and legibly marked directly on the unit or on a corrosion-resisting metal plat securely attached to the unit at the source of manufacture. Identification shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer.

3.22 Workmanship.

3.22.1 Steel Fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to ensure uniformity of size and shape.

3.22.2 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the casting's ability to perform its intended function.

3.22.3 Bolted Connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lock washers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.22.4 Riveted Connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and uniform size for the same diameter or rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes and in full contact with the surface of the member.

3.22.5 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings. Copies of welder qualification record shall be made available to authorized Government inspectors.

4. REGULATORY REQUIREMENTS.

4.1 Recycled recovered. or environmentally preferable materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term “recovered materials” means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Green Procurement Program. Green Procurement Program (GPP) is a mandatory federal acquisition program that focuses on the purchase and use of environmentally preferable products and services. GPP requirements apply to all acquisitions using appropriated funds, including services and new requirements. FAR 23.404(b) applies and states the GPP requires 100% of EPA designated product purchase that are included in the Comprehensive Procurement Guidelines list that contains recovered materials, unless the item cannot be acquired: a) competitively within a reasonable timeframe; b) meet appropriate performance standards, or c) at a reasonable price. The prime contractor is responsible for ensuring that all subcontractors comply with this requirement.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product Conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance before first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

within the specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this CID are met. If a product manufactured to metric dimensions exceeds the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Sources of Documents.

7.1.1 The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh PA 15250-7954. Electronic copies of the FAR may be obtained from https://www.acquisition.gov/far/.

7.1.2 The SAIA document can be obtained online at http://www.saiaonline.org/ or at SAIA – Scaffold & Access Industry Association, 1617 E. Rairvan Lane, Suite 5, PO Box 20574, Phoenix AZ 05034, Phone: 602-257-1144.

7.1.3 Military Specifications, Standards, and Handbooks referenced herein may be obtained from the Standardization Documents Order Desk, 700 Robbins Ave, Bldg 4, Section D, Philadelphia, PA 19111-5094 or online at http://quicksearch.dla.mil/ .

7.1.4 Underwriters Laboratories (UL) copies may be obtained online at http://ulstandardsinfonet.ul.com/ or from: COMM 2000, 1414 Brook Drive, Downers Grove, IL 60515-5000.

7.1.5 Air Force (AF) Manual. Copies of AF manuals may be obtained online at http://www.e-publishing.af.mil/ or from the Air Force Departmental Publishing Office (AFDPO) customer service phone at (202) 404-2438.

7.1.6 OCCUPATIONAL SAFETY AND HEALTH ASSOCIATION (OSHA). Copies of Standards should be sent to the OHSA Publication Office, 200 Constitution Avenue N. W., N-1301, Washington DC 20210, (202) 693-1888 or online at http://www.osha.gov (go to Publication and follow instructions for ordering).

7.1.7 The Society of Automotive Engineers (SAE) documents may be obtained online at http://www.sae.org/ or from SAE, 400 Commonwealth Drive, Warrendale, PA 15096.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.2 Ordering Data. The contract or order should specify the following:

a. CID document number, title and revision date.
b. Type of work platform required (see 2.1).
c. When batteries furnished are to be shipped dry charged and moisture sealed (see 3.5).
d. When a chassis is other than hydrostatically driven (see 3.10).
e. When a hydraulic driven chassis is required (see 3.10).
f. When an electrical system for electrification of work platform is required (see 3.12).
g. Types of tires to be furnished (see 3.14).
h. When a Fall Arrest Basket (FAB) is required (see 3.4.1).
i. When Wind Resistance (WR) is required (3.4.2)
j. Aircraft Protection Device (APD) is required (3.16.1)

7.3 Supersession Data. This CID supersedes Military Specifications MIL-M-87973 dated 08-FEB-1985 and MIL-T-29218A dated 29-AUG-1989:

SUPERSEDING CROSS REFERENCE			
BOOM HEIGHT	MIL-M-78973	MIL-T-29218	A-A-60004
40 foot	SIZE I	TYPE I	TYPE I
60 foot	SIZE II	TYPE II	TYPE II
80 foot	SIZE III	TYPE III	TYPE III
90 foot		TYPE IV	TYPE IV
100 foot		TYPE V	TYPE V

7.4 Part or Identifying Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PIN to be used for items acquired to this description is created as follows:

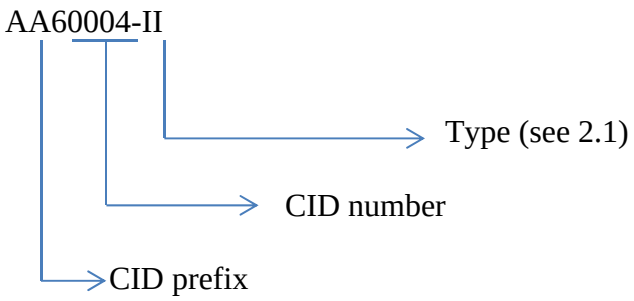

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.5 National Stock Number NSN. The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN
4940-01-213-7847
4940-01-083-6052
4940-01-089-0129
4940-01-586-9704

7.6 Key Words.

Chassis
Electrical system
Self-propelled
Work platform

7.8 Changes from previous issue. Marginal notations are not used in this in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MILITARY INTEREST

Custodians:
Army - AT
Air Force - 84

Preparing Activity:
Air Force - 84

Reviewer:
Navy - SH
DLA – CC, IS
Air Force - 99

Agent:
Air Force – 99
(Project 3930-2015-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.