INCH-POUND
A-A-60018A
13 May 2021
SUPERSEDING
A-A-60018
17 December 2020

COMMERCIAL ITEM DESCRIPTION

SPILL CONTAINMENT UNIT, HAZARDOUS MATERIALS

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers spill containment units to contain spills and leaks of aromatic hydrocarbons and other chemicals from vehicles, tankers, drums, intermediate bulk containers, and other equipment.

2. CLASSICATION

2.1 Type. The Type of spill containment unit shall be as specified in the contract (see 7.1).

Type I – Units that are one piece with no additional parts except accessories (see 3.5) and require no assembly beyond unfolding the unit and lifting the walls to the upright position.

Type II – All units meeting the salient characteristics outlined in section 3; including those which have multiple pieces or require additional assembly steps.

2.2 Size. The internal length, width, and height of the spill containment unit shall be as specified in the contract (see 7.1). For berms with walls that do not stand up on their own, the area covered by the walls shall not count towards the internal length and width. Type I berms shall not have any other features on the inside that obstructs this area.

2.3 Color. The color of spill containment unit shall be as specified in the contract (see 7.4(b)). If requested in the contract, the color of all support braces and hardware shall be sufficiently different from the color of the berm lining so that they can be immediately distinguished from each other in order to assist in identification of system failures.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 4235

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

Berm lining. Unless otherwise specified in the contract, the berm shall be lined with an 8130 XR5® reinforced geomembrane or equivalent. Equivalency shall be tested using the properties and tests outlined in Table I and the chemical resistance requirements outlined in 3.1.1. If 1932 PTFF is specified in the contract, the fabric shall be coated with a polyester based polyurethane and meet the relevant requirements specified in Table I. If PVC is specified in the contract, the fabric shall be coated with a Polyvinyl Chloride (PVC) coating (non-laminated) and meet the relevant requirements specified in Table I. All seams shall be at least 1inch (in.) welds and tested using an air lance in accordance with ASTM D4437 to ensure there are no leaks. The lining shall wrap around the corners in such a way that there are no leaks and the end walls can be raised or lowered. The top of the berm shall have at least a 1in. hem for additional support.

TABLE I. Lining properties

Property	Test Method[1]	Details	8130 XR5	1932 PTFF	PVC
Thickness	ASTM D751		0.029 in min	.033 in min	0.019 in min
Tear strength	ASTM D4533	Trapezoid tear	40/55 lbf min	75/75 lbf min	90/70 lbf min[1]
Breaking strength	ASTM D751	Grab test method	550/550 lbf min	1000/1000 lbf min	410/410 lbf min[2]
Low temperature resistance	ASTM D2136	4 hrs. 1/8 in. mandrel	Pass @ -30°F	Pass @ -50°F	Pass @ -22°F
Adhesion heat sealed seam	ASTM D751	Dielectric weld	17.5 lbf/in min	50 lbf/in min	7.5 lbf/in min
Dead load seam strength	ASTM D751	4 hrs. 2 in. seam 1 in. strip	Pass 240 lbf @ 70 °F Pass 120 lbf @ 160 °F	250 lbf min @ room 125 lbf min @ 160 °F	NA
Bursting strength	ASTM D751	Ball burst method	750 lbf min	1200 lbf min	NA
Hydrostatic resistance	ASTM D751	Method A	800 psi min	1500 psi min	660 psi min
Bonded seam strength	ASTM D751	Grab test method	550 lbf min	1000 lbf min	410 lbf min[2]
Abrasion resistance	ASTM D3389	H-18 wheel, Load 1000 g	Min 3000 cycles before fabric exposure Max 50 g/100 cycles weight loss	Min 10000 cycles before fabric exposure Max 2.9 g/100 cycles weight loss	Min 4000 cycles before fabric exposure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

Puncture resistance	ASTM D751	Screwdriver Method	100 lbf min	194 lbf min	NA

[1] Tested in accordance with ASTM D2261
[2] Tested in accordance with ASTM D5035
[3] Tested in accordance with ASTM D3884 using a Taber H-18 Wheel, 1,000 gram load, 70 rpm, and no suction.

3.1.1 8130 XR5 chemical resistance. 8130 XR5 linings shall be chemically resistance to each of the following chemicals: Kerosene (ASTM D3699), diesel fuel (ASTM D975), naphtha (TT-N-95), JP-8 turbine fuel (MIL-DTL-83133), 160 °F saltwater (ASTM D1141), gasoline (ASTM D910), 50% hydrochloric acid, 50% sulfuric acid, and 60% sodium hydroxide. Unless otherwise stated, solutions are to be made with technical grade chemicals and freshly prepared distilled water. When a specification covers multiple grade, any grade is acceptable. Chemical resistance shall be tested by immerging a sample of the lining in the chemical at question for 28 days. Samples shall be at least 2 in. by 4 in. and have exposed edges on each side. The weight, breaking strength, and tear strength (determined in accordance with Table I) after testing shall not vary by more than 15% from the original values.

3.2 Type I entry/exit walls. Type I berms shall have entry/exit walls which shall allow vehicles to drive through in either direction without damage or significant wear to the unit. The berms shall show no signs of damage, wear, or leaks after being driven through by vehicles in excess of 5 tons. If the wall does not automatically return to the vertical position after driven on by a vehicle, a mechanism such as a floatation device shall be included which will raise the wall in the event of a spill or precipitation without letting any of the liquid escape, even if the berm is filled to capacity.

3.3 Construction. The berm shall show no signs of damage, wear, or leaks when filled to capacity with liquid for 24 hours. All materials used shall be tested and suitable for military environments. Sidewalls shall have braces placed at a maximum (max) of 2 feet (ft.) on center. If braces are used for the entry/exit walls, they shall also be placed at a max of 2 ft. on center. All braces for Type I berms shall include a grommet stake down point and be able to be restrained with sandbags. Braces for Type I berms shall not have any diagonal support legs. Type II berms shall have a way to be secured by stakes and/or sandbags. When staked down or secured with sandbags, each side shall be capable of withstanding 4 pounds of force (lbf.) per square foot in both directions without failure. Walls which automatically rise in case of a spill do not need to meet this strength requirement, provided they can fully contain a spill of water when the berm is completely covered in 6 lbf./ft.^{2} of sand or snow. The unit shall not require inflation to assemble.

3.4 Foldability and weight. The unit shall be able to fold to a compact, stowed position for transportation. Exact folded dimensions and weight will depend on the size and are to be specified in the contract if necessary.

3.5 Optional accessories. The following accessories shall be included with the berm if specified in the contract (see 7.4(d)). They shall be furnished as follows unless otherwise specified in the contract. These accessories do not apply to the single-piece construction requirement of Type I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

berms. Berm kits shall include at least two tire mats, sufficiently sized ground tarp(s) to fit the berm (see 3.5.1), a filter, and a repair kit.

3.5.1 Tire Mats and Ground Tarps. Tire mats and ground tarps shall protect the berm from puncture and wear from objection lodged in tires or on the ground respectively. The minimum dimensions of tire mats and ground tarps shall be 0.065 in. thick and as long as the berm. Tire mats shall be 3 ft. wide. Ground tarps shall consist of either two 6 ft. wide tarps or one tarp which is wider than the berm. The materials for both shall have a puncture resistance of at least 85 lbf when tested in accordance with ASTM D751.

3.5.2 Filter. Filters shall filter all organic hydrocarbons from drain-off water to less than 5 parts per million when tested in accordance with EPA Method 1664. The filter shall have a manual shutoff valve and an automatic shut off system for when the filter has reached its absorption capacity. Tests shall be performed using pure JP-8 or other military grade fuels as well as a 1% mixture of the fuel with water. The fluids shall be supplied by gravity with a minimum initial pressure head equivalent to the height of the berm. Drain-off from the 1% mixture shall be tested at multiple points throughout the test. Drain-off from the pure fuel test usually constitutes a failure but may be tested if it appears to be residual water.

3.5.3 Repair kit. Repair kits shall include at least 10 $ft.^2$ of 8130 XR5 (unless otherwise stated in the contract), a heat gun capable of bonding the lining material, scissors, a knife, sandpaper, at least 8 ounces of PVC cement, and an instructions sheet.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.


6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(e)).

7. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. Height and material should not be included in ground tarp or tire mat PINs. Length, width, height, and material should not be included in filter and repair kit PINs.

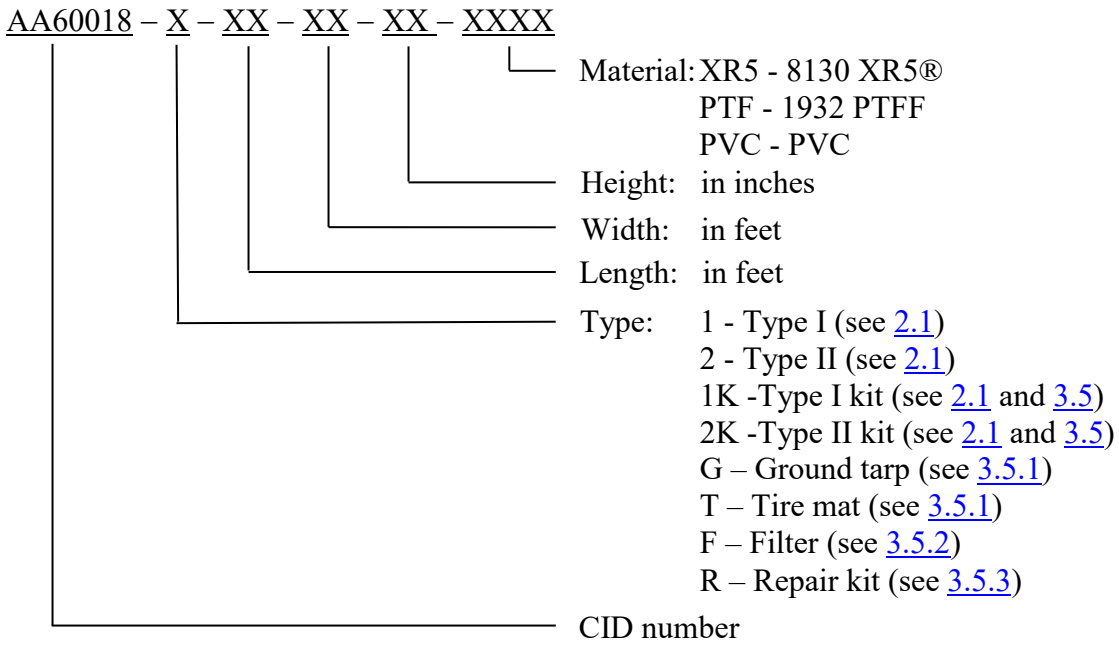

Examples of reference part numbers:

AA60018-1-36-12-12-XR5
AA60018-G-36-6
AA60018-F

7.2 Sources of documents.

7.2.1 Electronic copies of the FAR may be obtained from https://www.acquisition.gov/far/.

7.2.2 Electronic copies of government documents may be obtained from https://quicksearch.dla.mil/.

7.2.3 Electronic copies of ASTM documents may be obtained from https://www.astm.org/.

7.2.4 Electronic copies of EPA documents may be obtained from https://www.epa.gov/.

7.3 National Stock Numbers (NSNs). Table II gives a list of NSNs assigned that correspond to this CID and the Type, size, and material associated with these NSNs. The details provided for each NSN are nonbinding and subject to changes. Users should refer to the contract to verify these details. The list may not be indicative of all possible NSNs associated with the CID.

TABLE II. List of NSNs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

NSN	Type	Length (ft.)	Width (ft.)	Height (in.)	Part	Material
4235013871381	1	6	4	12	Berm	8130 XR5
4235013871498	1	10	10	12	Berm	8130 XR5
4235015788978	1	16	10	12	Berm	8130 XR5
4235016701849	1	16	10	12	Berm	8130 XR5
4235015698818	1	26	12	12	Berm	8130 XR5
4235015698792	1	30	12	12	Berm	8130 XR5
4235015698833	1	36	12	12	Berm	8130 XR5
4235015503802	1	54	14	12	Berm	8130 XR5
4235015698848	1	56	14	12	Berm	8130 XR5
4235016217309	1K	6	4	12	Berm kit	8130 XR5
4235016217227	1K	10	10	12	Berm kit	8130 XR5
4235016217327	1K	16	10	12	Berm kit	8130 XR5
4235016217217	1K	26	12	12	Berm kit	8130 XR5
4235016217317	1K	30	12	12	Berm kit	8130 XR5
4235016217288	1K	36	12	12	Berm kit	8130 XR5
4235016217290	1K	54	14	12	Berm kit	8130 XR5
4235016217292	1K	56	14	12	Berm kit	8130 XR5
4235014194798	2	12	12	12	Berm	8130 XR5
4235015428169	2	4	4	12	Berm	PVC
4235015626025	2	6	4	8	Berm	PVC
4235015623899	2	6	6	8	Berm	PVC
4235015480855	2	8	6	8	Berm	PVC
4235200011867	2	25	15	12	Berm	1932 PTF
4235014194801	2K	40	14	12	Berm kit	8130 XR5
4235016188532	G	4	6		Ground tarp	
4235016187901	G	10	6		Ground tarp	
4235016188264	G	16	6		Ground tarp	
4235016187881	G	26	6		Ground tarp	
4235016187917	G	30	6		Ground tarp	
4235016188190	G	36	6		Ground tarp	
4235016187891	G	54	6		Ground tarp	
4235016186850	G	56	6		Ground tarp	
4235016187897	T	10	3		Tire mat	
4235016187902	T	16	3		Tire mat	
4235016187906	T	26	3		Tire mat	
4235016187911	T	30	3		Tire mat	
4235016188187	T	36	3		Tire mat	
4235016188193	T	54	3		Tire mat	
4235016188542	T	56	3		Tire mat	
4330015549493	F				Filter	
4235015500900	R				Repair kit	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. Acquisition documents must specify the following information:
a. CID document number, revision, and CID PIN
b. Color (see 2.3).
c. Material (see 3.1).
d. Optional accessories, if required (see 3.5).
e. Packaging requirements (see 6.1 and 3.4).

7.5 Approval of equivalent test methods. Prior approval of the Contracting Officer is required for use of equivalent test methods. A description of the proposed method should be submitted through the Contracting Officer to the technical agency. This description should include but not be limited to the procedures used, the accuracy and precision of the method, test data to demonstrate the accuracy and precision and drawings of any special equipment required.

7.6 Subject term (key word) listing.

Aromatic hydrocarbons
Drums
Ground tarp
Intermediate bulk containers
Petroleum Products
Polyvinyl Chloride
Tire mat
Tanker
Vehicle

MILITARY INTERESTS:
Custodian:
Army - AV
Navy - SH
DLA - GS

Reviewers:
Navy – MC

CIVIL AGENCY
COORDINATING ACTIVITY:
GSA - FAS

Preparing activity:
DLA – GS3

(Project 4235-2021-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.