INCH-POUNDS

A-A-60019

February 16, 2021

COMMERCIAL ITEM DESCRIPTION

GAITERS, BOOT, COLD WEATHER

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers the requirements for waterproof boot gaiters that provide protection to the lower leg in wet cold (20° F) to intense cold weather (-25° F) environments.

2. CLASSIFICATION. The finished gaiters will be of one (1) type in the following sizes:

SIZE SCHEDULE

SIZE Army Cold Weather Combat Boot size	SMALL (S) 3 – 7	MEDIUM (M) 6 – 9	LARGE (L) 8 – 11	X-LARGE (XL) 10 – 13	XX-LARGE (XXL) 13 – 16

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. The boot gaiters shall be designed to be worn over the trousers and cover the shin, calf, and top of the boot. The bottom shall be wider than the top, to fit uniformly over Army-issued Cold Weather Combat Boots (CWCB). The top opening shall be adjustable to accommodate layered clothing and stay secure during moderate physical activity. A front entry closure shall run the length of the gaiters, top to bottom, for ease of donning and doffing. The front closure is intended to prevent snow from penetrating between clothing layers. An adjustable stirrup shall fit under the boot and secure the gaiter to the boot. The gaiters shall each have one (1) lace hook to secure the bottom of the gaiter to the laces of the boot. The gaiters shall be a multi-fabric design using four (4) separate cloths; one (1) for the upper portion, one (1) for the exterior of the inner leg, one (1) for the exterior of the lower foot, and one (1) for the interior of the lower foot portion of the gaiter (see Figures 2 and 3).

3.2 Basic materials.

3.2.1 Upper. The finished cloth for the upper portion of the gaiter shall be a waterproof, moisture vapor permeable, multi-layer laminate. The finished material shall conform to the requirements specified in Table I, when tested as specified in Table I.

TABLE I. Physical requirements, upper.

Characteristic	Requirement	Test Method
Weight, oz./yd^2 (maximum)	7.0	ASTM D3776/D3776M
Water vapor transmission rate, g/m^2/24 hrs. (minimum)	2,000	ASTM E96, Method BW, 1/
Hydrostatic resistance	No leakage below hydrostatic height of 50 cm	AATCC TM127 or ASTM D751, 2/, 3/
Spray Rating, initial	90, 90, 80	AATCC TM22
Dimensional stability, percent (maximum) Warp Filling	 5.0 5.0	AATCC TM96, Test VIc, A, 0

1/ The back side of the laminate (interior of gaiter) shall face the water. The free stream air velocity shall be 550 + 50 fpm as measured 2-inches above the fabric specimen. The air flow shall be measured at least 2-inches from any other surface. The test shall run for 2 hours and weight measurements shall be taken at only the start and completion of the test. The specimen shall be sealed in any manner which prevents wicking and/or leaking of water out of the cup.

2/ Leakage is defined as the appearance of water at three (3) or more different places within the 4-1/2-inch diameter test area at a hydrostatic height of 50.0 centimeters.

3/ In cases of dispute, the ASTM method prevails.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.2.2 Exterior, inner leg. The finished cloth for the exterior of the inner leg shall be a woven cloth consisting of synthetic fiber and treated with a durable water repellant finish. The finished material shall conform to the requirements specified in Table II, when tested as specified in Table II.

TABLE II. Physical requirements, exterior, inner leg.

Characteristic	Requirement	Test Method
Weight, oz./yd^2	8.5 - 9.5	ASTM D3776/D3776M
Breaking strength, lbs. (minimum) Warp Filling	 500 300	ASTM D5034
Colorfastness Crocking (minimum) Wet Dry Perspiration (acid & alkaline) Laundering (after three (3) cycles)	 3.5 3.5 3 – 4 3 – 4	 AATCC TM8, 1/ AATCC TM15, 2/ AATCC TM61, Test 1A, 2/
Dimensional stability, percent (maximum) Warp Filling	 4.0 3.0	AATCC TM96, Test VIc, A, 0
Dynamic water absorption, initial, percent (maximum)	25	AATCC TM70
Spray Rating, initial	90, 90, 80	AATCC TM22

1/ Rated using the AATCC EP8, AATCC 9-Step Chromatic Transference Scale.
2/ Rated using the AATCC EP1, Gray Scale for Color Change and AATCC EP2, Gray Scale for Staining.

3.2.3 Exterior, lower foot. The finished cloth for the exterior of the lower foot shall be a woven cloth consisting of synthetic fiber and treated with a durable water repellant finish. The cloth shall be treated on the back side only with a suitable clear polyurethane coating compound. The finished material shall conform to the requirements specified in Table III, when tested as specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE III. Physical requirements, exterior, lower foot.

Characteristic	Requirement	Test Method
Weight, oz./yd^2	11.0 - 12.0	ASTM D3776/D3776M
Breaking strength, lbs. (minimum) Warp Filling	 500 300	ASTM D5034
Colorfastness Crocking (minimum) Wet Dry Perspiration (acid & alkaline) Laundering (after three (3) cycles)	 3.5 3.5 3 – 4 3 – 4	 AATCC TM8, 1/ AATCC TM15, 2/ AATCC TM61, Test 1A, 2/
Dimensional stability, percent (maximum) Warp Filling	 4.0 3.0	AATCC TM96, Test VIc, A, 0
Dynamic water absorption, initial, percent (maximum)	20	AATCC TM70
Spray Rating, initial	90, 90, 80	AATCC TM22

1/ Rated using the AATCC EP8, AATCC 9-Step Chromatic Transference Scale.
2/ Rated using the AATCC EP1, Gray Scale for Color Change and AATCC EP2, Gray Scale for Staining.

3.2.4 Interior, lower foot. The finished cloth for the interior of the lower foot shall be a woven cloth, consisting of synthetic fiber, coated on one side with a clear, waterproof compound, and treated with a durable water repellant finish.

3.2.5 Front entry closure. The finished material for the front entry closure shall be hook and loop fastener tape, at least 1-1/2-inches in width. The length of the fastener tapes shall be, at a minimum, equal to the height of the gaiter minus 1-inch (see 3.4).

3.2.6 Stirrup. The finished material for the stirrup shall be a coated webbing, high tensile-strength fabric laminate, or equivalent material, at least 1/2-inch in width.

3.2.7 Lace hook. The lace hook shall be a corrosion resistant material.

3.3 Color. The color of all cloths shall be Coyote 498. Hardware, webbing, and fasteners shall be either Coyote 498 or Black 557.

3.4 Measurements. The gaiters shall conform to the finished measurements and weight requirements specified in Table IV. The sizes Small, Medium, Large, X-Large, and XX-Large may be abbreviated to S, M, L, XL, and XXL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurements.

Size	Small	Medium	Large	X-Large	XX-Large
Weight/pair (±) 2 oz.	11.5	11.5	12.5	12.5	13.5
(A) Height (±) 1.5 in.	14.5	15	16	17	18
(B) Maximum top circumference (±) 1.5 in.	16.5	17.5	18.5	19.5	20.5

(A) Undo all fasteners and straps before placing right-footed gaiter on a flat surface, with the interior side facing up. With the gaiter in this position, measure height in a straight line from bottom left corner to top left corner (see Figure 3).
(B) With the gaiter positioned as indicated above, measure maximum top circumference in a straight line along top of the gaiter, starting at the top left edge of the gaiter and finishing at the left edge of the hook/loop fastener (see Figure 3).

3.5 Labels. Each gaiter shall have commercially acceptable identification, size, and care labels attached. The labels may be combined. The labels shall be in accordance with MIL-DTL-32075, Type V or Type VI. Class 4 of MIL-DTL-32075 shall be used for the identification and size labels, and Class 3 shall be used for the care label. When the labels are combined, the item description shall be omitted from the Class 3 label. The label(s) shall be attached to the inside of the gaiters so that they are not visible when the gaiters are worn.

3.5.1 Identification and size label. The label shall contain the item description, size, National Stock Number (NSN), contract number, contractor's name, and Fur, Wool, or Fiber Products Act information.

3.5.2 Care label. The care label shall include the following information:

Machine wash gentle, mild soap, cold water. No bleach or fabric softener. Drip dry.

3.5.3 Barcode label/hang tag. Unless otherwise specified in the contract or purchase order, each packaged pair of gaiters (see 6.1) shall have a barcode label/hang tag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar coding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSN's by the contracting activity. The initials "UPC" must appear beneath the code. The bar code for NSN and UPC type shall be a medium to high density and shall be located so it is completely visible on the gaiters when they are folded and/or packaged as specified. The barcodes shall be clearly legible and readable by a scanner. The label's location shall cause no damage to the item.

3.6 Figures. Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall control.

3.7 Toxicity. The finished material shall not present a health hazard and shall show compatibility with prolonged direct skin contact when tested as specified in 5.6. Chemicals

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

3.8 Workmanship. The gaiters shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. REGULATORY REQUIREMENTS. Unless otherwise specified the offer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The gaiters provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specification, standards and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract or purchase order. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract or purchase order.

5.2 Market acceptability. The gaiters offered must have been sold to the commercial market or the Government.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.3).

5.4 Visual examination. The gaiters shall be examined for the defects listed in Table V. The lot size shall be expressed in units of gaiters. The sample unit is one (1) pair of gaiters. The inspection level and AQL shall be as specified in the contract or purchase order. Unless otherwise specified, scoring shall be performed on defects visible from a normal inspection distance of 3-feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE V. Visual defects.

Examine	Defect
Material and workmanship	Any hole, cut, tear, delamination, missing, broken, or loose yarn, needle chew, or weakening defect in the material Seams: puckered, distorted, pleated, wavy, twisted, irregular or open, loose stitch tension resulting in loose seam; raw edges. Stitches: broken or missing thread or stitch, any run or dropped stitches Any thin areas, mends, or patches Any cracked, broken, or damaged hardware Any material defects, distorted parts, or poor workmanship Noticeable variation in size in a pair Any component part omitted or not as specified, distorted, full, tight or twisted parts. Any defect not specified in this table which affects, form, fit or function.
Color	Any shade variation within a part or between two (2) gaiters of a pair Color not as specified
Cleanliness	Any spot or stain on outside clearly noticeable Any excessive thread ends not trimmed or removed, raw edges Any odor affecting serviceability
Labels	Omitted, incorrect, illegible, not attached where specified; barcodes omitted, not readable by scanner; human-readable interpretation (HRI) omitted or illegible; barcode not visible on folded, packaged item; bar code attachment causes damage to the item
Marking	Marking missing, incorrect or illegible
Packaging	Any gaiters not packaged in accordance with the contract or purchase order

5.5 End item dimensional examination. The gaiters shall be examined for conformance to the finished measurements specified in Table IV. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of gaiters. The sample unit shall be one (1) pair of gaiters. The inspection level, expressed in terms of defects per hundred units, shall be as specified in the contract or purchase order.

5.6 Toxicity test. When required (see 7.6), an acute dermal irritation study and a skin sensitization study shall be conducted. When the results of the studies indicate the gaiters are not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with the Modified Draize Procedure (see 7.2.5). If the toxicity requirement (see 3.7) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required.

5.7 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Packaging. Preservation, packing, and marking shall be specified in the contract or purchase order (see 7.6).

7 NOTES.

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available online at https://www.aatcc.org.

7.2.2 ASTM Standard Test Methods are available online at https://www.astm.org.

7.2.3 ASQ/ANSI Z1.4 – Sampling Procedures and Tables for Inspection of Attributes are available online at https://asq.org.

7.2.4 Repeat Insult Patch Test - Modified Draize Procedure -Principles and Methods of Toxicology, A Wallace Hayes (editor) are available online at https://www.crcpress.com.

7.3 Standard samples. For access to standard samples address the contracting activity issuing the invitation for bids or request for proposal.

7.4 Intended use. These gaiters are intended for wear by male and female military personnel of the Department of Defense operating in cold weather environments.

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for stated requirement.

7.6 Ordering data. The contract or purchase order should specify the following:

a. Title, number, and date of this Commercial Item Description.
b. Size required (see 2.1).
c. Labeling information (see 3.5).
d. When toxicity testing is required (see 3.7 and 5.6).
e Regulatory requirements (see 4).
f. Product conformance provisions (see 5.1).
g. Acceptance criteria (see 5.7).
h. Packaging requirement (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.7 Subject terms.

Abrasion resistant
Crampons
Skis
Snow protection
Waterproof

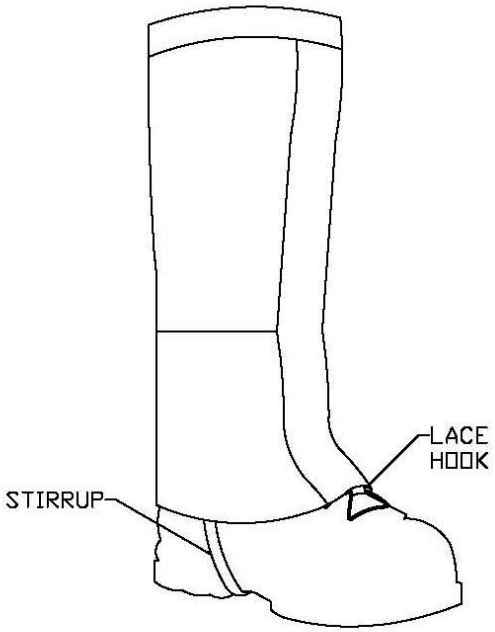


FIGURE 1. Gaiters, Cold Weather (right foot).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

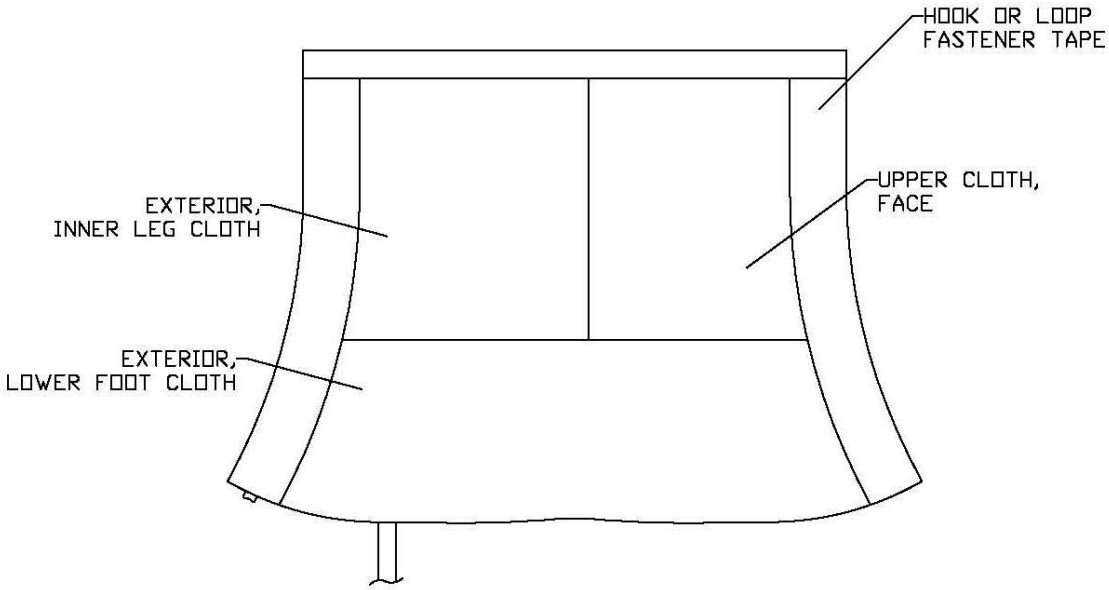


FIGURE 2. Gaiters, Cold Weather (right foot, exterior, laid flat).

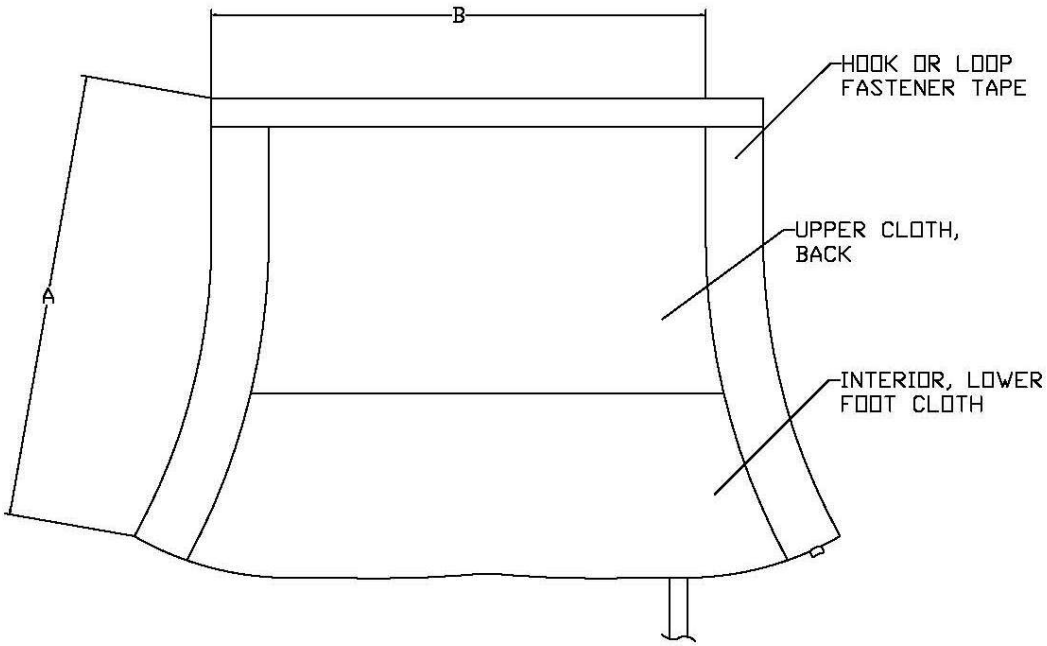


FIGURE 3. Measurement Guidelines (right foot, interior, laid flat).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - GL

CIVIL AGENCY COORDINATING ACTIVITY: GSA - FAS

Preparing Activity:
DLA - CT

(Project: 8415-2021-020)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.