INCH-POUND
A-A-60026
December 2, 2021

COMMERCIAL ITEM DESCRIPTION

UNDERSHIRT, MATERNITY

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers the requirements for a maternity undershirt for wear by pregnant female military personnel of the Department of Defense.

2. CLASSIFICATION. The undershirt covered by this commercial item description shall be one type and the following classes and sizes, as specified (see 7.3).

2.1 Classes.

Class 1 – OD Green 522

Class 2 – Tan 499

Class 3 – Blue CG 3362

Class 4 – White

2.2 Sizes.

X-Small

Small

Medium

Large

X-Large

XX-Large

3. SALIENT CHARACTERISTICS.

3.1 Description. The maternity undershirts shall have a crew neck style with neck trim and a hemmed bottom. The neck trim shall be made of double thickness rib material to finish 1 inch wide. The side seams shall be gathered with elastic sewing tape ruching starting 4 inches up from the bottom hem (see figures 1 and 2).

3.2 Standard sample. The finished undershirt shall match the standard sample, as applicable to the specified class, for appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced.

3.2.1 Class 1 color. The color of the class 1 undershirt shall be a good match to color chip 24119 of AMS-STD-595.

3.2.2 Class 2 color. The color of the class 2 undershirt shall be a good match to color chip 20180 of AMS-STD-595.

3.2.3 Class 3 color. The color of the class 3 undershirt shall be a good match to CG 3362.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 8425

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.2.4 Class 4 color. The color of the class 4 undershirt shall be a good match to color chip 27885 of AMS-STD-595.

3.3 Materials.

3.3.1 Basic material. The knit material for the undershirt shall be a synthetic and cotton blend, not exceeding 50 percent synthetic. The cloth shall conform to the requirements in table I and 3.3.3.

TABLE I. Material requirements – all classes.

Characteristic	Requirement	Test Method
Weight (oz per square yard)	3.0 to 4.5	ASTM D3776/D3776M
Bursting strength (pounds, min.)	80	ASTM D3787
Dimensional stability (5 cycles) (max.)		
Wales	8.0%	AATCC TM135 (1)(IV)(Ai)
Courses	5.5%	
Colorfastness, rating (min.)		
Laundering (3 cycles) 1/		
Color change	4	AATCC TM61 test 2A and AATCC EP1
Staining	4	AATCC TM61 test 2A and AATCC EP2
Light (40 AATCC Fading Units or 170 kilojoules)	3	AATCC TM16.3 option 3 and AATCC EP1
Crocking (dry and wet)	3	AATCC TM8 and AATCC EP8
Moisture vapor transmission, g/m^2/24 hours (min.)		
Initial	1550	ASTM E96/E96M test B
After 5 launderings	1450	AATCC TM135 (1)(IV)(Ai)
Seam smoothness, rating (min.)	SS-3	AATCC TM143 or TM88B(1)(IV)(Ai)
Seam strength, pounds (min.)	80	ASTM D3787 2/
Pilling (visual appearance after five laundering cycles) (min.)	4	AATCC TM135 (1)(IV)(Ai) 3/
Visual shade matching		
Daylight D65 (6500±200 Kelvin [K]) (with illumination of 100±20 foot candles) 4/	Good match to standard sample	AATCC EP9, Option C 5/
Incandescent (2856±200K)	Good match to standard sample	AATCC EP9, Option C 5/

FOOTNOTES:

1/ Laundering shall have no detrimental effect on the durability of the materials, including the ruching elastic.

2/ The procedure for ASTM D3787 shall be followed except that knit seam strength shall be evaluated, with the seam in the middle and facing up. Seam strength shall be measured at the shoulder and underarm seams.

3/ Pilling visual appearance shall be measured using the pilling standard scale in ASTM D3511/D3511M.

4/ See 7.4.1.

5/ See 7.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.3.2 Neck trim material. The neck trim cloth shall be a 1 x 1 rib knit cloth made of a synthetic and cotton blend, with a synthetic percentage between 25 and 50 percent. Materials having a tendency to cause latent tendering or yellowing of the cloth shall not be used in any of the dyeing or finishing operations. Resin finishes shall not be used. The cloth shall be preshrunk and the cloth shall conform to the requirements in table II and 3.3.3.

TABLE II. Neck trim requirements.

Characteristic	Requirement	Test Method
Construction		
Wales	32±1 wales per inch	ASTM D8007
Courses	24±1 courses per inch	ASTM D8007
Dimensional stability (5 cycles)		
Wales	±10%	AATCC TM135 (1)(IV)(Ai)
Courses	±10%	AATCC TM135 (1)(IV)(Ai)
Colorfastness, rating (min.)		
Laundering (3 cycles) 1/		
Color change	4	AATCC TM61 test 2A and AATCC EP1
Staining	4	AATCC TM61 test 2A and AATCC EP2
Light (40 AATCC Fading Units or 170 kilojoules)	3	AATCC TM16.3 option 3 and AATCC EP1
Crocking (dry and wet)	3	AATCC TM8 and AATCC EP8

FOOTNOTE:

1/ Laundering shall have no detrimental effect on the durability of the materials, including the ruching elastic.

3.3.3 Labile sulfur. Dyes and compounds containing sulfur capable of oxidation to sulfuric acid shall not be used. The cloth shall be "Free" (see 3.3.3.1.a) of labile sulfur when tested as specified in 3.3.3.1.

3.3.3.1 Presence of labile sulfur test. In the determination of labile sulfur in textile materials with lead acetate, two 1.50±0.01-gram samples from each material submitted for evaluation shall be tested. Each of the two samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of American Chemical Society (ACS) grade stannous chloride crystals in 100 milliliters of ACS grade hydrochloric acid (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over the top of the test tube. The lead acetate solution shall contain 5.0 grams of chemically pure (CP) reagent grade lead acetate and enough distilled water to make up a 100-milliliter solution; if the solution is not clear, a few drops (one at a time) of glacial acetic acid shall be added until the solution is clear. The test tube containing the textile sample, stannous chloride, and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

a. Free – the filter paper shows no discoloration or staining of any kind.
b. Slight – the filter paper shows a light tan to light brown discoloration stain.
c. Moderate – the filter paper shows a dark brown discoloration stain.
d. Severe – the filter paper shows a black discoloration stain.

The rating shall be recorded. The results shall be recorded as "pass" or "fail".

3.3.4 Elastic tape. The elastic sewing tape shall be clear 1/4-inch-wide elastic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

3.3.5 Thread. Thread for all seaming and stitching shall be in accordance with standard commercial practice. The color of the thread shall be a good match to the basic material and shall meet the colorfastness requirements specified for the basic material. The finished thread shall have no chemical finishes or treatments, other than those commonly used on commercial threads.

3.4 Labels.

3.4.1 Label and marking. A label meeting the requirements of MIL-DTL-32075, type III, class 14 shall be placed at the upper back inside of the undershirt, centered, and 1/2 inch below the seam join of the neck trim and back panel. The label shall include size, manufacturer's style number, fiber content, lot number, and manufacturing date, as well as laundering (care) information. If service-specific markings are requested, these should be specified in the contract or purchase order (see 7.3). When tested in accordance with AATCC TM135 (1)(IV)(Ai), the label shall have a colorfastness rating of "good" to laundering.

3.4.2 Bar code label. The undershirt shall be coded with a tag meeting the specifications of MIL-DTL-32075, type VIII, class 17; alternatively, a label meeting the requirements of type VII, class 17 may be adhered to the outside of the individual poly bag.

3.5 Figures. Figures 1 and 2 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figures, the written document shall govern.






3.6 Finished measurements. The undershirts shall conform to the finished measurements in table III when measured in accordance with the guidance in table IV. Garments shall be laid flat, allowed to rest, and measurements shall be taken from the wearer's left without stretching or bunching. The sizes may be abbreviated as XS, S, M, L, XL, and XXL.

TABLE III. Finished measurements (inches).

Measurement	Tol.	X-Small	Small	Medium	Large	X-Large	XX-Large
A Neck Opening	±1/2	6-1/2	6-3/4	7	7-1/4	7-1/2	7-3/4
B Across Shoulder	±1/2	14	14-1/2	15	15-5/8	16-1/4	16-7/8
C Front Neck Drop	±1/4	3-3/4	3-7/8	4	4-1/8	4-1/4	4-3/8
D Back Neck Drop	±1/8	1	1-1/8	1-1/4	1-3/8	1-1/2	1-5/8
E Sleeve Length	±1/2	6-1/2	6-3/4	7	7-1/4	7-1/2	7-3/4
F Sleeve Opening Width	±1/2	5-3/4	6-1/8	6-1/2	7	7-5/8	8-1/4
G Length at Front High Point Shoulder	±1/2	28	28-1/2	29	29-1/2	30	30-1/2
H Half Chest	±1/2	17-1/2	18-1/2	19-1/2	20-3/4	22	23
I Ruching Length, Relaxed	±3/8	7	7	7	7	7	7
J Ruching Length, Stretched	-3/8, +1	11	11	11	11	11	11
K Bottom Sweep	±1/2	17-1/2	18-1/2	19-1/2	20-3/4	22	23


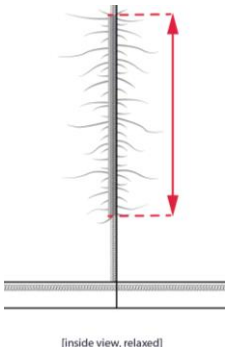
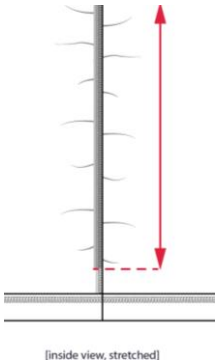
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurement guidance.

Measurement	Description	Measurement Guidance
Neck Opening (see table III, A)	Measurement from the high point shoulder (HPS) 1/ straight across to opposite HPS.	
Across Shoulder (see table III, B)	Measurement straight from wearer's left shoulder seam join point to wearer's right shoulder seam join point.	
Front Neck Drop (see table III, C)	Measurement from a line formed by a straightedge from HPS to HPS 1/ to center front of seam join of neck trim at front neckline.	
Back Neck Drop (see table III, D)	Measurement from a line formed by a straightedge from HPS to HPS 1/ to center of seam join of neck trim at back neckline.	
Sleeve Length (see table III, E)	Measurement from outer shoulder seam join of sleeve to the bottom of sleeve opening along natural fold.	
Sleeve Opening Width (see table III, F)	Measurement along sleeve opening, edge-to-edge at natural fold.	
Length at Front High Point Shoulder (see table III, G)	Measurement taken from HPS 1/ at front straight down to the bottom edge.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurement guidance – Continued.

Measurement	Description	Measurement Guidance
Half Chest (see table III, H)	Measurement taken 1 inch below armhole measured straight across, edge-to-edge.	
Ruching Length, Relaxed (see table III, I)	Measurement of the side seam, while relaxed (not stretched), from beginning of ruching elastic to end of ruching elastic along the side seam. Note: Measurement should be taken on the inside of the shirt to better see the elastic ends.	
Ruching Length, Stretched (see table III, J)	Measurement of the side seam, while stretched, from beginning of ruching to end of ruching along the side seam. Note: Measurement should be taken on the inside of the shirt to better see the elastic ends.	
Bottom Sweep (see table III, K)	Measurement taken straight across the bottom from edge to edge at natural fold.	

FOOTNOTE:

1/ High point shoulder is at the junction of the shoulder seam and the collar.

3.7 Patterns. Commercial patterns shall be used and shall conform to the design requirements specified herein. Patterns shall be properly balanced when in accordance with the measurements listed in table III.

4. REGULATORY REQUIREMENTS. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the government or commercial market.

5.3 Visual examination. Each undershirt shall be examined for the defects listed below. Defects in excess of the manufacturer's own quality assurance standards shall be cause for failure of the undershirt.

a. Material defects – any hole, cut, tear, mend, drop stitch, loose knit, miss knit, slub, streak, knitted in waste, permanent fold, pleat, or crease; any spot or stain, discoloration, or color not as specified; any shaded part; or any objectionable odor.

b. Seams and stitching – loose or tight stitching tension, broken or missing thread or stitch, needle chew; any part caught in an unrelated operation or stitching; raw edge, thread breaks, or thread ends not removed; or any seam puckered, distorted, pleated, irregular, or open.

c. Workmanship – any component part omitted, twisted, not specified size, misplaced, poorly shaped, or not lying flat. Measurement of item not as specified.

d. Labels – label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation omitted or illegible; bar code not visible on folded, packaged item; or bar code label causes damage to the item.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Intended use. The undershirt is intended for wear by pregnant female military personnel of the Department of Defense.

7.2 Source of documents.

7.2.1 American Association of Textile Chemists and Colorists (AATCC). AATCC test methods are available from www.aatcc.org or P.O. Box 12215, Research Triangle Park, NC 27709.

7.2.2 ASTM International. ASTM standards are available from www.astm.org or ASTM International, 100 Barr Harbor Dr., P.O. Box C700, West Conshohocken, PA 19428.

7.2.3 Defense specifications. Defense specifications are available online at https://quicksearch.dla.mil.

7.2.4 SAE International. SAE standards are available from www.sae.org or SAE World Headquarters, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

7.3 Ordering data. The contract or order should specify the following:

a. CID document number and revision.

b. Quantity required.

c. Class(es) and size(s) required (see 2).

d. Service-specific markings, if requested (see 3.4.1).

e. Product conformance provisions (see 5.1).

7.4 Visual shade matching. In 2019, option A of AATCC EP9 was changed to option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35±5-degree angle relative to the horizontal. The observer will view the specimens at a 90-degree angle, relative to the plane of the specimens."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

7.4.1 Use of D75 illuminant. The use of D75 illuminant with a color temperature of 7500±200K illumination of 100±20 foot candles in lieu of the specified D65 illuminant is permitted.

7.5 Standard samples. Standard samples for shade or appearance can be obtained through the contracting agency.

7.6 Key words.

Cotton
Pregnant
Ruching
Synthetic

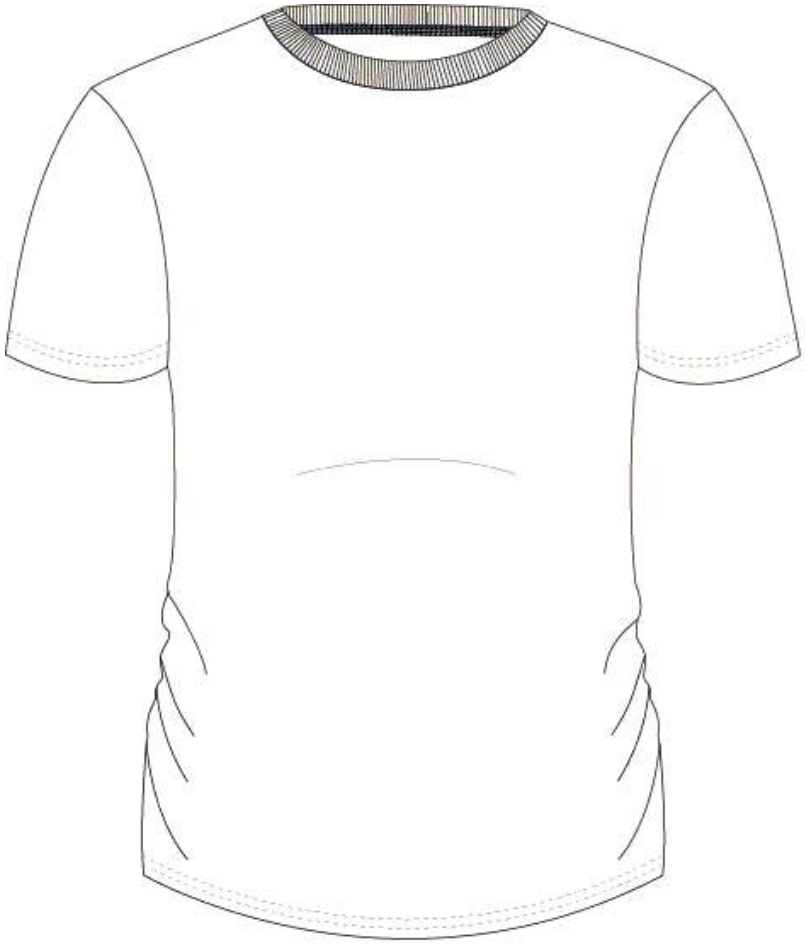


FIGURE 1. Undershirt, maternity (front view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

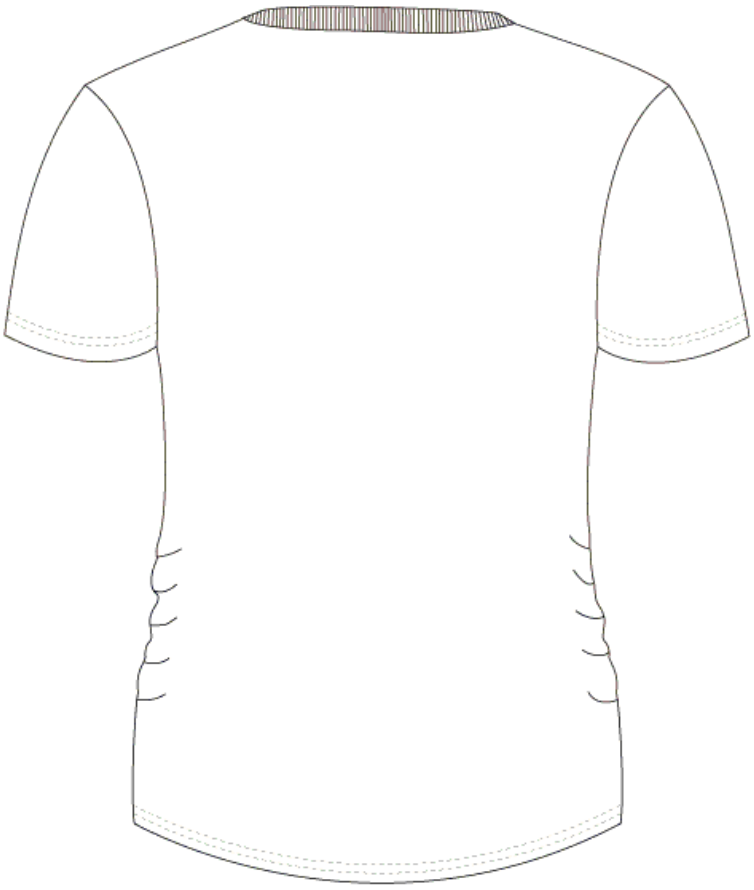


FIGURE 2. Undershirt, maternity (back view).

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army – AV
Navy – MC

Review Activities:
Army – GL, MI
Navy – CG1, NU
DLA – CT

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing Activity:
Navy – MC
(Project 8425-2021-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.