INCH-POUND

A-A-60032

24 May 2022

COMMERCIAL ITEM DESCRIPTION

SPACERS, CADMIUM AND HEXAVALENT-CHROMIUM FREE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1 SCOPE. This commercial item description (CID) covers spacers containing no cadmium or hexavalent-chromium in their finishes.

2 CLASSIFICATION

2.1 Types.

Type I - Spacer, Sleeve, Screw and Bolt (use AIA/NAS43)

3 SALIENT CHARACTERISTICS.

3.1 Materials. Spacers shall be manufactured as specified in the Aerospace Industry Association (AIA) document listed above, by type, except the plating/finishes shall be cadmium free and hexavalent-chromium free finishes as specified herein. The use of recovered materials made in compliance with regulatory requirements is acceptable provided all requirements of this CID are met.

Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or send email to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 5365

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2 Dimensions. Dimensions for all designated type of spacers apply after plating/finishing.

3.3 Finish/plating. Finish/plating types for each type of spacer shall be designated as in 7.1.1. The finishes/plating options for all designated types of spacers are listed below:

a. Alloy steel – shall be Zn-Ni plated in accordance with MIL-PRF-32647, Type K16, non-dyed.
b. Aluminum alloy – chemically treated in accordance with MIL-DTL-5541, Type II, Class 1A, non-dyed, or MIL-DTL-81706, Type II, Class 1A, non-dyed; or anodized in accordance with MIL-PRF-8625, Type IC or IIB, Class 1. Sealers (clear or any color) shall not contain hexavalent chromium.

4 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13693; as applicable.

5 PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to perform or witness any of the inspections it deems necessary to ensure supplies and services conform to prescribed requirements.

6 PACKAGING. Preservation, packaging, packing, and marking shall be as specified in the contract or order.

7 NOTES

The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

7.1 Table. The following Table indicates new finish/plating PIN's which are Cadmium and hexavalent-chromium free for designated spacers.

7.1.1 Cadmium and hexavalent-chromium free PIN codes. Cadmium and hexavalent-chromium free part numbers shall be as identified by the examples herein and in conjunction with the associated AIA documents. The following finish/plating (cadmium and hexavalent-chromium free) codes are given:

QX - Alloy Steel - Zinc-Nickel electroplating, MIL-PRF-32647 Type K16, non-dyed
J - Aluminum Alloy – Chemically treated MIL-DTL-5541, Type II, Class 1A or MIL-DTL-81706, Type II, Class 1A, non-dyed
K - Aluminum Alloy – Anodize MIL-PRF-8625, TYPE IC or IIB, Class 1; sealers shall not contain hexavalent chromium


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE I – Type I (-1).

New AA60032 Part Number (Alloy Steel with zinc-nickel electroplating)	New AA60032 Part Number (Aluminum Alloy chemically treated)	New AA60032 Part Number (Aluminum Alloy anodized)	Reference (NAS43) Dia Dash No.
AA60032-1-QX-0-*	AA60032-1-J-0-*	AA60032-1-K-0-*	0
AA60032-1-QX-2-*	AA60032-1-J-2-*	AA60032-1-K-2-*	1
AA60032-1-QX-3-*	AA60032-1-J-3-*	AA60032-1-K-3-*	3
AA60032-1-QX-4-*	AA60032-1-J-4-*	AA60032-1-K-4-*	4
AA60032-1-QX-5-*	AA60032-1-J-5-*	AA60032-1-K-5-*	5
AA60032-1-QX-6-*	AA60032-1-J-6-*	AA60032-1-K-6-*	6
AA60032-1-QX-7-*	AA60032-1-J-7-*	AA60032-1-K-7-*	7
AA60032-1-QX-8-*	AA60032-1-J-8-*	AA60032-1-K-8-*	8
AA60032-1-QX-9-*	AA60032-1-J-9-*	AA60032-1-K-9-*	9
AA60032-1-QX-10-*	AA60032-1-J-10-*	AA60032-1-K-10-*	10
AA60032-1-QX-12-*	AA60032-1-J-12-*	AA60032-1-K-12-*	12
AA60032-1-QX-14-*	AA60032-1-J-14-*	AA60032-1-K-14-*	14
AA60032-1-QX-16-*	AA60032-1-J-16-*	AA60032-1-K-16-*	16

* Placeholder for the part length in 1/64 inch increments.

Example of part number:

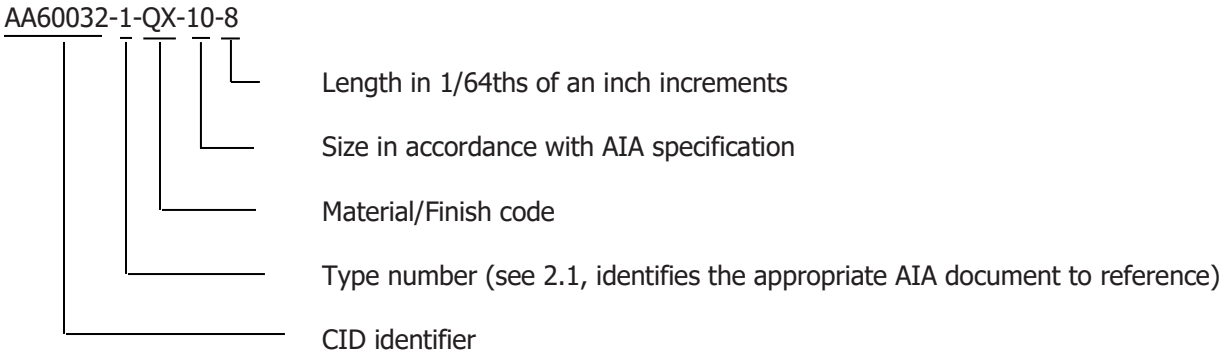

Example Part Numbers:

AA60032-1-QX-4-16 = an AIA/NAS43 – Dash No. -4, steel spacer, Zinc-Nickel Type K16 plating, 0.250 (Screw or Bolt Reference diameter), 0.250 long.

AA60032-1-J-6-8 = an AIA/NAS43 – Dash No. 6, aluminum spacer, chemically treated, 0.375 (Screw or Bolt Reference diameter), 0.125 long.

AA60032-1-K-10-4 = an AIA/NAS43 – Dash No. 10, aluminum spacer, Anodize, 0.625 (Screw or Bolt Reference diameter), 0.0625 long.

7.2 Email addresses for source documents.

7.2.1 FAR: Copies of the Federal Acquisition Regulations are available online from https://www.acquisition.gov/browse/index/far.

7.2.2 Executive order (EO). Copies of the EO documents are available online from https://www.epa.gov/greeningepa/executive-order-13693.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.2.3 Military specifications: Copies of military specifications are available online from https://quicksearch.dla.mil.

7.2.4 AIA documents: Copies of Aerospace Industry Association are available online from https://www.aia-aerospace.org/standards/.

7.3 Ordering data. The contract or order should specify the following:

a. Title, number and date of this CID.
b. Federal stock number, (if available).
c. Material (alloy steel or aluminum alloy).
d. Part number.
e. Quantity.

7.4 Key words:

a. Alloy steel
b. Aluminum alloy
c. Plating
d. Finish

MILITARY INTERESTS:

Custodian:
Army – AT
Navy – OS
Air Force – 71
DLA – GS

Review activities:
Army – AR, AV, CR4, MI
Navy – AS, MC, YD
DLA – GS7

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
Army – AT

(Project 5365-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.