MIL-R-83459/3B
16 January 1986
Supersedes
MIL-R-83459/3A
15 January 1979

MILITARY SPECIFICATION SHEET

RIVET, TITANIUM, BIMETAL, 95 KSI F_{su}, 100° REDUCED FLUSH CROWN HEAD, TYPE III

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the rivet described herein shall consist of this document and the issue in effect of MIL-R-83459.

Materials:	Body - 6A1-4V titanium alloy (AMS 4967) Tail - 45Cb titanium alloy (AMS 4982)
Heat treatment:	Body - Heat treated to 95 KSI minimum shear strength Tail - Heat treated to 50 KSI minimum shear strength
Surface texture:	(RHR maximum per ANSI B46.1) 63 microinches on straight shank, head to shank radius and bearing surface of head; 125 microinches on other surfaces.
Finish:	None.
Lubrication:	As specified in MIL-R-83459, Cetyl Alcohol in accordance with MIL-L-87132, Type I, Grade B.
Concentricity:	Conical surface of head to "D" diameter within .003 TIR.

Part number example: M83459/3-6-4

- -4 — Grip dash number from table II
- -6 — Diameter dash number from table I
- M83459/3 — Basic part number

Application notes:
1. Do not cut rivets which must be cut to length.
2. Do not use rivets in less than specified minimum grip.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB, OH 45433-6503 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

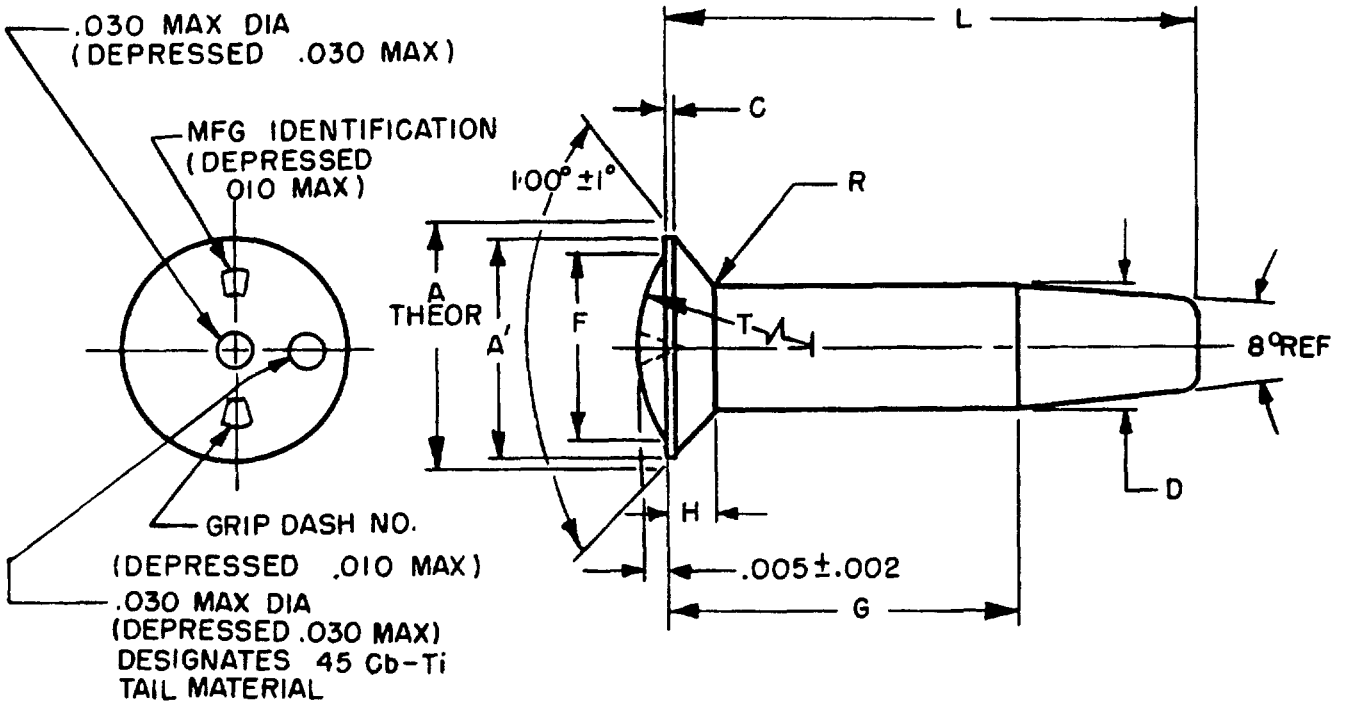


TABLE I. Dimensions.

1st DASH NO. DIA	-5	-6	-8
NOMINAL DIAMETER	5/32	3/16	1/4
D +.0000, -.0005	.1635	.1895	.2495
A ±.0025	.2444	.2991	.3923
A' (MINIMUM)	.230	.282	.373
C ±.002	.004	.005	.006
F ±.005	.220	.272	.363
H (REFERENCE)	.034	.046	.060
R ±.005	.020	.025	.025
T (REFERENCE)	1.21	1.85	3.29
G (GRIP)	See table II		
L (LENGTH)	See table II		
WEIGHT	See table III		

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:14Z
Check the source to verify that this is the currentversion before use.

TABLE II. Lengths in inches.

GRIP RANGE		G	5/32 DIA.		3/16 DIA.		1/4 DIA.	
MIN.	MAX.	+.015 -.000	DASH NO.	L ±.010	DASH NO.	L ±.010	DASH NO.	L ±.010
.094	.125	.093	5-2	.298				
.126	.187	.125	5-3	.360	6-3	.385		
.188	.250	.187	5-4	.422	6-4	.447	8-4	.502
.251	.312	.250	5-5	.485	6-5	.510	8-5	.565
.313	.375	.312	5-6	.547	6-6	.572	8-6	.627
.376	.437	.375	5-7	.610	6-7	.635	8-7	.690
.438	.500	.437	5-8	.672	6-8	.697	8-8	.752
.501	.562	.500	5-9	.735	6-9	.760	8-9	.815
.563	.625	.562	5-10	.797	6-10	.822	8-10	.877
.626	.687	.625	5-11	.860	6-11	.885	8-11	.940
.688	.750	.687	5-12	.922	6-12	.947	8-12	1.002
.751	.812	.750	5-13	.985	6-13	1.010	8-13	1.065
.813	.875	.812	5-14	1.047	6-14	1.072	8-14	1.127
.876	.937	.875	5-15	1.110	6-15	1.135	8-15	1.190
.938	1.000	.937	5-16	1.172	6-16	1.197	8-16	1.252

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

TABLE III. Weights.

Pounds Per 1000 Pieces			
2nd Dash No. Grip	1st Dash No. and Nominal Dia		
	-5 5/32	-6 3/16	-8 1/4
-2	1.18		
-3	1.39	2.03	
-4	1.61	2.31	4.40
-5	1.83	2.59	4.89
-6	2.05	2.87	5.38
-7	2.27	3.15	5.87
-8	2.49	3.43	6.36
-9	2.71	3.71	6.85
-10	2.93	3.99	7.34
-11	3.15	4.27	7.83
-12	3.37	4.55	8.32
-13	3.59	4.83	8.81
-14	3.81	5.11	9.30
-15	4.03	5.39	9.79
-16	4.25	5.67	10.28

Custodian:
Navy - AS
Air Force - 11

Preparing Activity:
Air Force - 11

Project No. 5320-0583

Reviewer:
Air Force - 82, 99
DLA - IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH-POUND
MIL-R-83459/3B
NOTICE 1
10 June 1994

MILITARY SPECIFICATION

RIVET, TITANIUM, BIMETAL, 95 SKI F SU, 100 DEGREES REDUCED FLUSH CROWN HEAD, TYPE III

MIL-R-83459/3B dated 16-JAN-86 has been reviewed and determined to be valid for use in acquisition

Custodians:
Air Force - 11
Navy - AS

Preparing activity:
DLA-IS

AMSC N/A FSC 5320

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.