This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force -

FED. SUP CLASS
5935

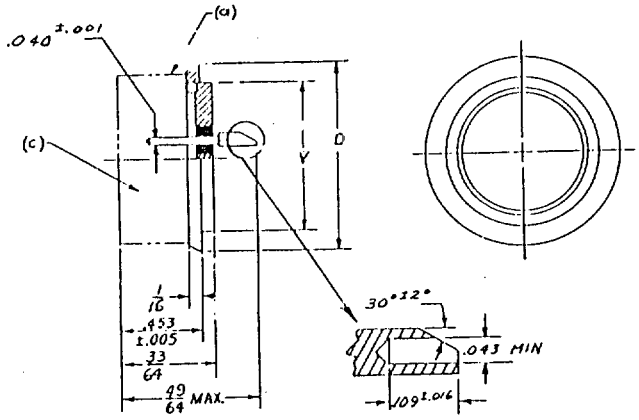

(b) SIZE	D O.D.	V ±.005 SKIRT OD
16	1 1/16	.803
19	1 1/4	.984
21	1 7/16	1.171

(a) MATING DIMENSIONS, MALE THREAD IN ACCORDANCE WITH MS24243M, PIN CONTACTS ONLY, "M" IN PART NUMBER.

(b) SHELL SIZE AS SPECIFIED IN CONNECTOR PART NUMBER.

(c) INSERT ARRANGEMENT IN ACCORDANCE WITH MS24242. INSERT ARRANGEMENT NUMBER CORRESPONDING TO SHELL SIZE AND AS SPECIFIED IN CONNECTOR PART NUMBER. ALTERNATE INSERT POSITION, IF APPLICABLE, AS SPECIFIED IN CONNECTOR PART NUMBER.
EXAMPLE OF CONNECTOR PART NUMBERS: SEE MIL-C-25955

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.002, FRACTIONS ±1/64, ANGLES ±1/2°.

APPROVED 9-JAN-58 REVISED (A) 27 MAY 58 (B) 18 OCT 60 (C) 17 FEB 88

© CANCELED WITH NO SUPERSEDING STANDARD

P.A AF-85	International interest	TITLE	MILITARY STANDARD
Other Cust	A- K- AF-	CONNECTOR-RECEPTACLE, ELECTRICAL, HERMETIC, BOX MOUNTED	MS24239 (USAF)
Procurement Specification MIL-C-25955		SUPERSEDES:	PAGE 1 OF 1

AMSC N/A

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-F319-01

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.