INCH-POUND
MS24456E
21 December 2005
SUPERSEDING
MS24456D
11 October 1968

DETAIL SPECIFICATION SHEET

# SWITCH, SENSITIVE, SEALED, SPDT, CLASS A5 OR B8

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

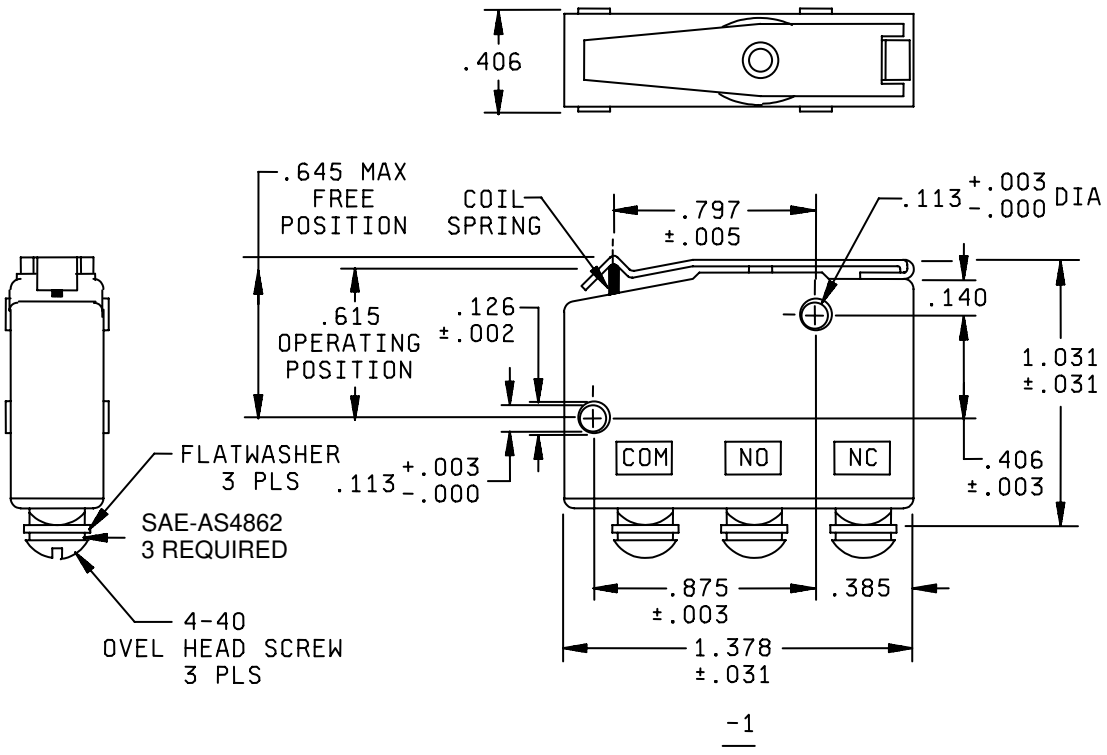


FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

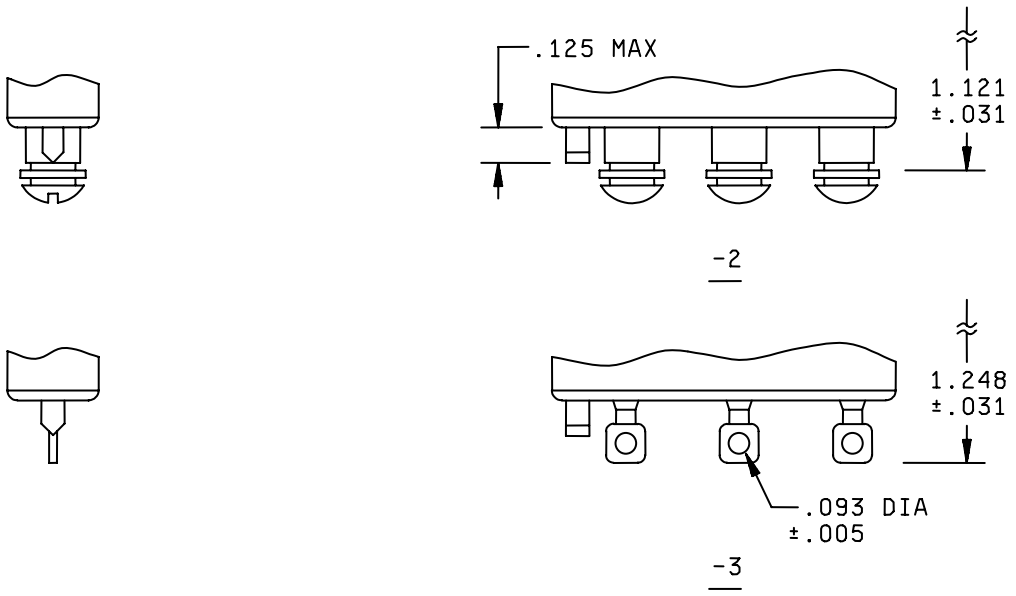


FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

TABLE I. Detail requirements.

| Dash No. | Class | Current Capacity (Amperes) | | | | | | Ambient Temp Range °C | Insulation (Sea Level Only) Volts RMS |
|---|---|---|---|---|---|---|---|---|---|
| | | 28 Volts DC | | | 115 Volts 400 Cycles AC | | | | |
| | | Resistive | Inductive | Lamp | Resistive | Inductive | Lamp | | |
| -1 | A5 | 10 | 5 | 3 | 10 | 5 | 3 | -55 to +71 | 1000 |
| -2 | B8 | | | | | | | -70 to +120 | 1250 |
| -3 | | | | | | | | | |

Referenced Documents
MIL- PRF-8805
SAE-AS4862

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - MI
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2006-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.