FED. SUP CLASS
6115

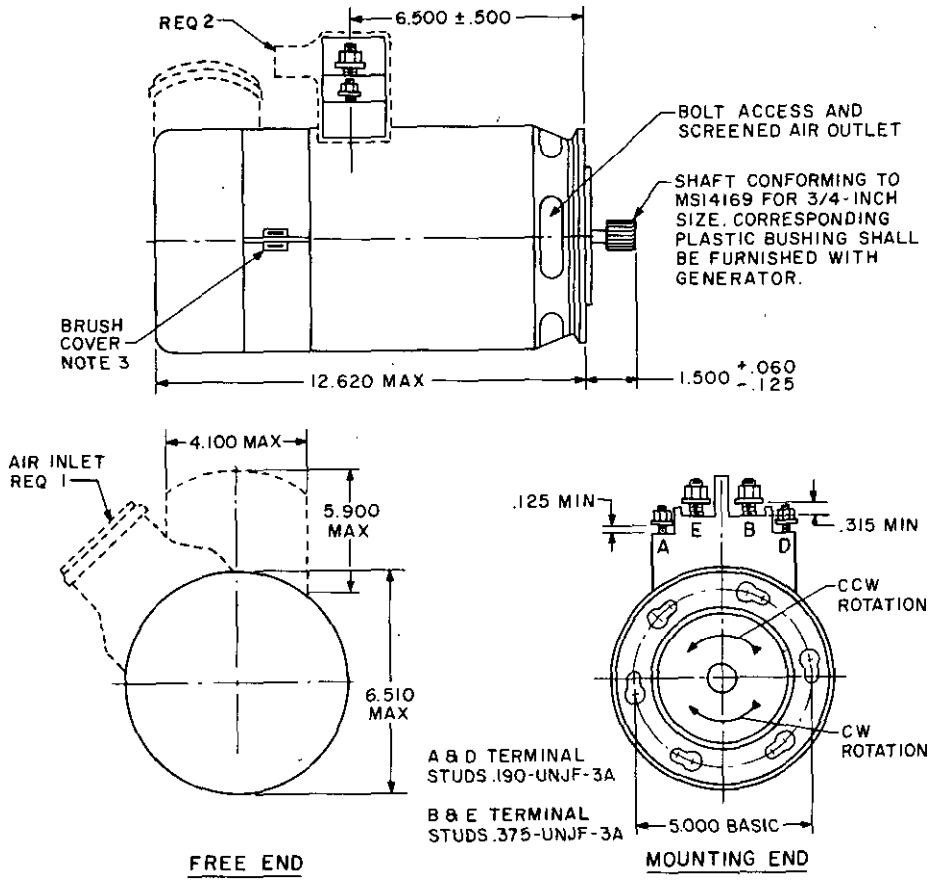

GENERATOR CHARACTERISTICS	
PROPERTY	VALUE
RATED VOLTAGE. VOLTS	30
RATED CURRENT. AMPERES	400
RATED SPEED RANGE. RPM	4000-8000
CONTINUOUS OPERATING SPEED. RPM	6000
MINIMUM SPEED FOR REGULATION. RPM	4500
MAXIMUM SPEED FOR REGULATION. RPM	10000
OVERSPEED. RPM	11000
REGULATED FIELD CURRENT - MAXIMUM. AMPERES	8
POWER TO BE DISSIPATED BY REGULATOR-MAX.. WATTS	90
WEIGHT-MAXIMUM. POUNDS	53
EFFICIENCY - MINIMUM. 70 TO 100 PCT LOAD. PERCENT	65
MOMENT OF OVERHANG-MAXIMUM. POUND-INCHES	265
MINIMUM NATURAL FREQUENCY. HERTZ	275
SHEAR SECTION. POUND-INCHES	1700-2000
OVERLOAD CURRENT AT 6000 RPM. AMPERES	
200 PERCENT FOR 5 SECONDS	800
150 PERCENT FOR 2 MINUTES	600

Ⓓ CANCELLED SUPERSEDED BY MS3364

APPROVED 28 AUGUST 1957 REVISED Ⓐ 16 DECEMBER, 1961 Ⓑ 7 MAY 1970 Ⓒ 24 APRIL 1978 Ⓓ 31 JULY 1979

P.A. NAVY - AS Other Cust	TITLE GENERATOR, DIRECT CURRENT, 400 AMPERE, CLASS A, 4000 TO 8000 RPM	MILITARY STANDARD MS25247(AS)
PROCUREMENT SPECIFICATION MIL-G-6162	SUPERSEDES: AN3624 FOR NAVAIR USE	SHEET 1 OF 2

DD FORM 1 MAR72 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. N6115-N401

PLATE NO. Z3071

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/3267

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23115:06Z
Check the source to verify that this is the current version before use.