NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the BuWep (Department of the Navy) and the USAF and is mandatory for use by the Department of the Navy and all other military activities as required by the standard where suitable.

FED. SUP CLASS
5930

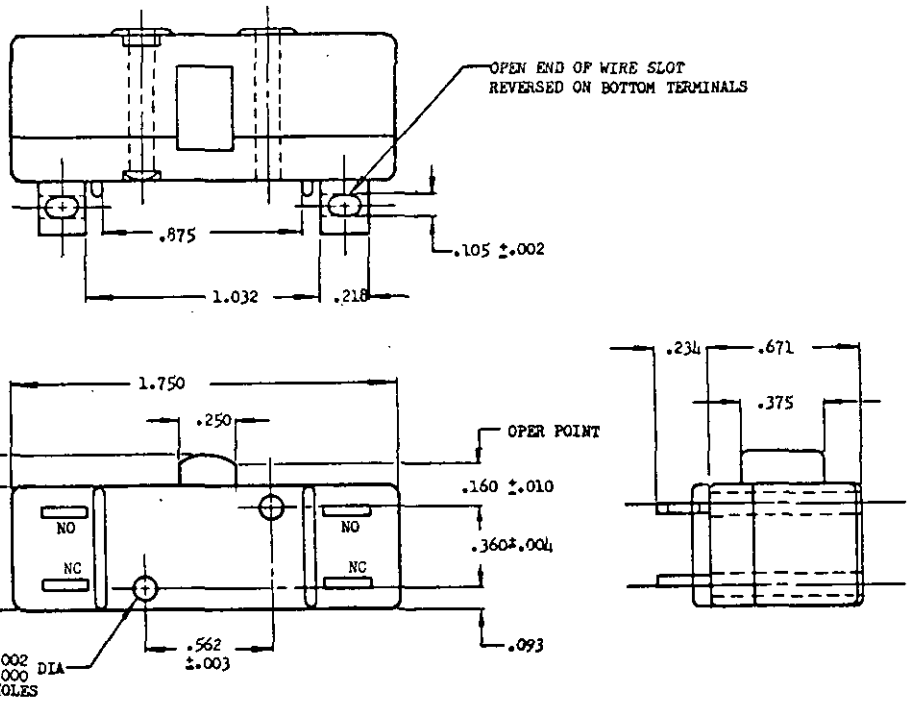



CIRCUIT

DASH NO.
-1

DETAIL REQUIREMENTS:

(B)	ACTUATING FORCE	3.18 LBS MAX
(E)	PRETRAVEL	.093 MAX
(F)	MOVEMENT DIFFERENTIAL	.065 MAX
(G)	OVERTRAVEL	.015 MIN
(I)	MINIMUM OPERATING CYCLES	25,000
(J)	WEIGHT	.05 LBS MAX
(K)	STRENGTH OF PUSH BUTTON AND PUSH BUTTON STOP	25 LBS
(L)	STRENGTH OF TERMINALS	5 LBS
(N)	CONTACT GAP	DOUBLE .050
(P)	AMBIENT TEMPERATURE RANGE	-70° TO +150°C

CURRENT CAPACITY 28 VOLT DC			CURRENT CAPACITY 115 VOLTS, 400 CYCLES AC		
RESISTIVE	INDUCTIVE	MOTOR	RESISTIVE	INDUCTIVE	MOTOR
40	30	15	30	20	10

MATERIAL: CASE, COVER AND PUSH BUTTON; DIALLYL PHTHALATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; DECIMALS ±.015.

EXACT SHAPE OF SWITCH OPTIONAL, PROVIDED DIMENSIONS SPECIFIED ARE NOT EXCEEDED.

TEST REQUIREMENT: FOR SHORT CIRCUIT TEST, USE SIZE AN-12 CABLE AND CIRCUIT BREAKER MS25017-35.

(B) CANCELLED - For procurement use MIL-S-8805/19

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 13 Oct 58 REVISED (A) 8 Aug 60 (B) 10 OCTOBER 1968

P.A. Navy - AS Other Cust USAF 85	TITLE SWITCH, SENSITIVE - MOMENTARY 30 AMP, 2 CIRCUIT, SIDE SOLDER TERMINAL	MILITARY STANDARD MS25357(ASG)
PROCUREMENT SPECIFICATION MIL-S-6743	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited distribution) Previous editions of this form are obsolete. 5930-F230-13

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2341