MS9136

FED. SUP CLASS
2995

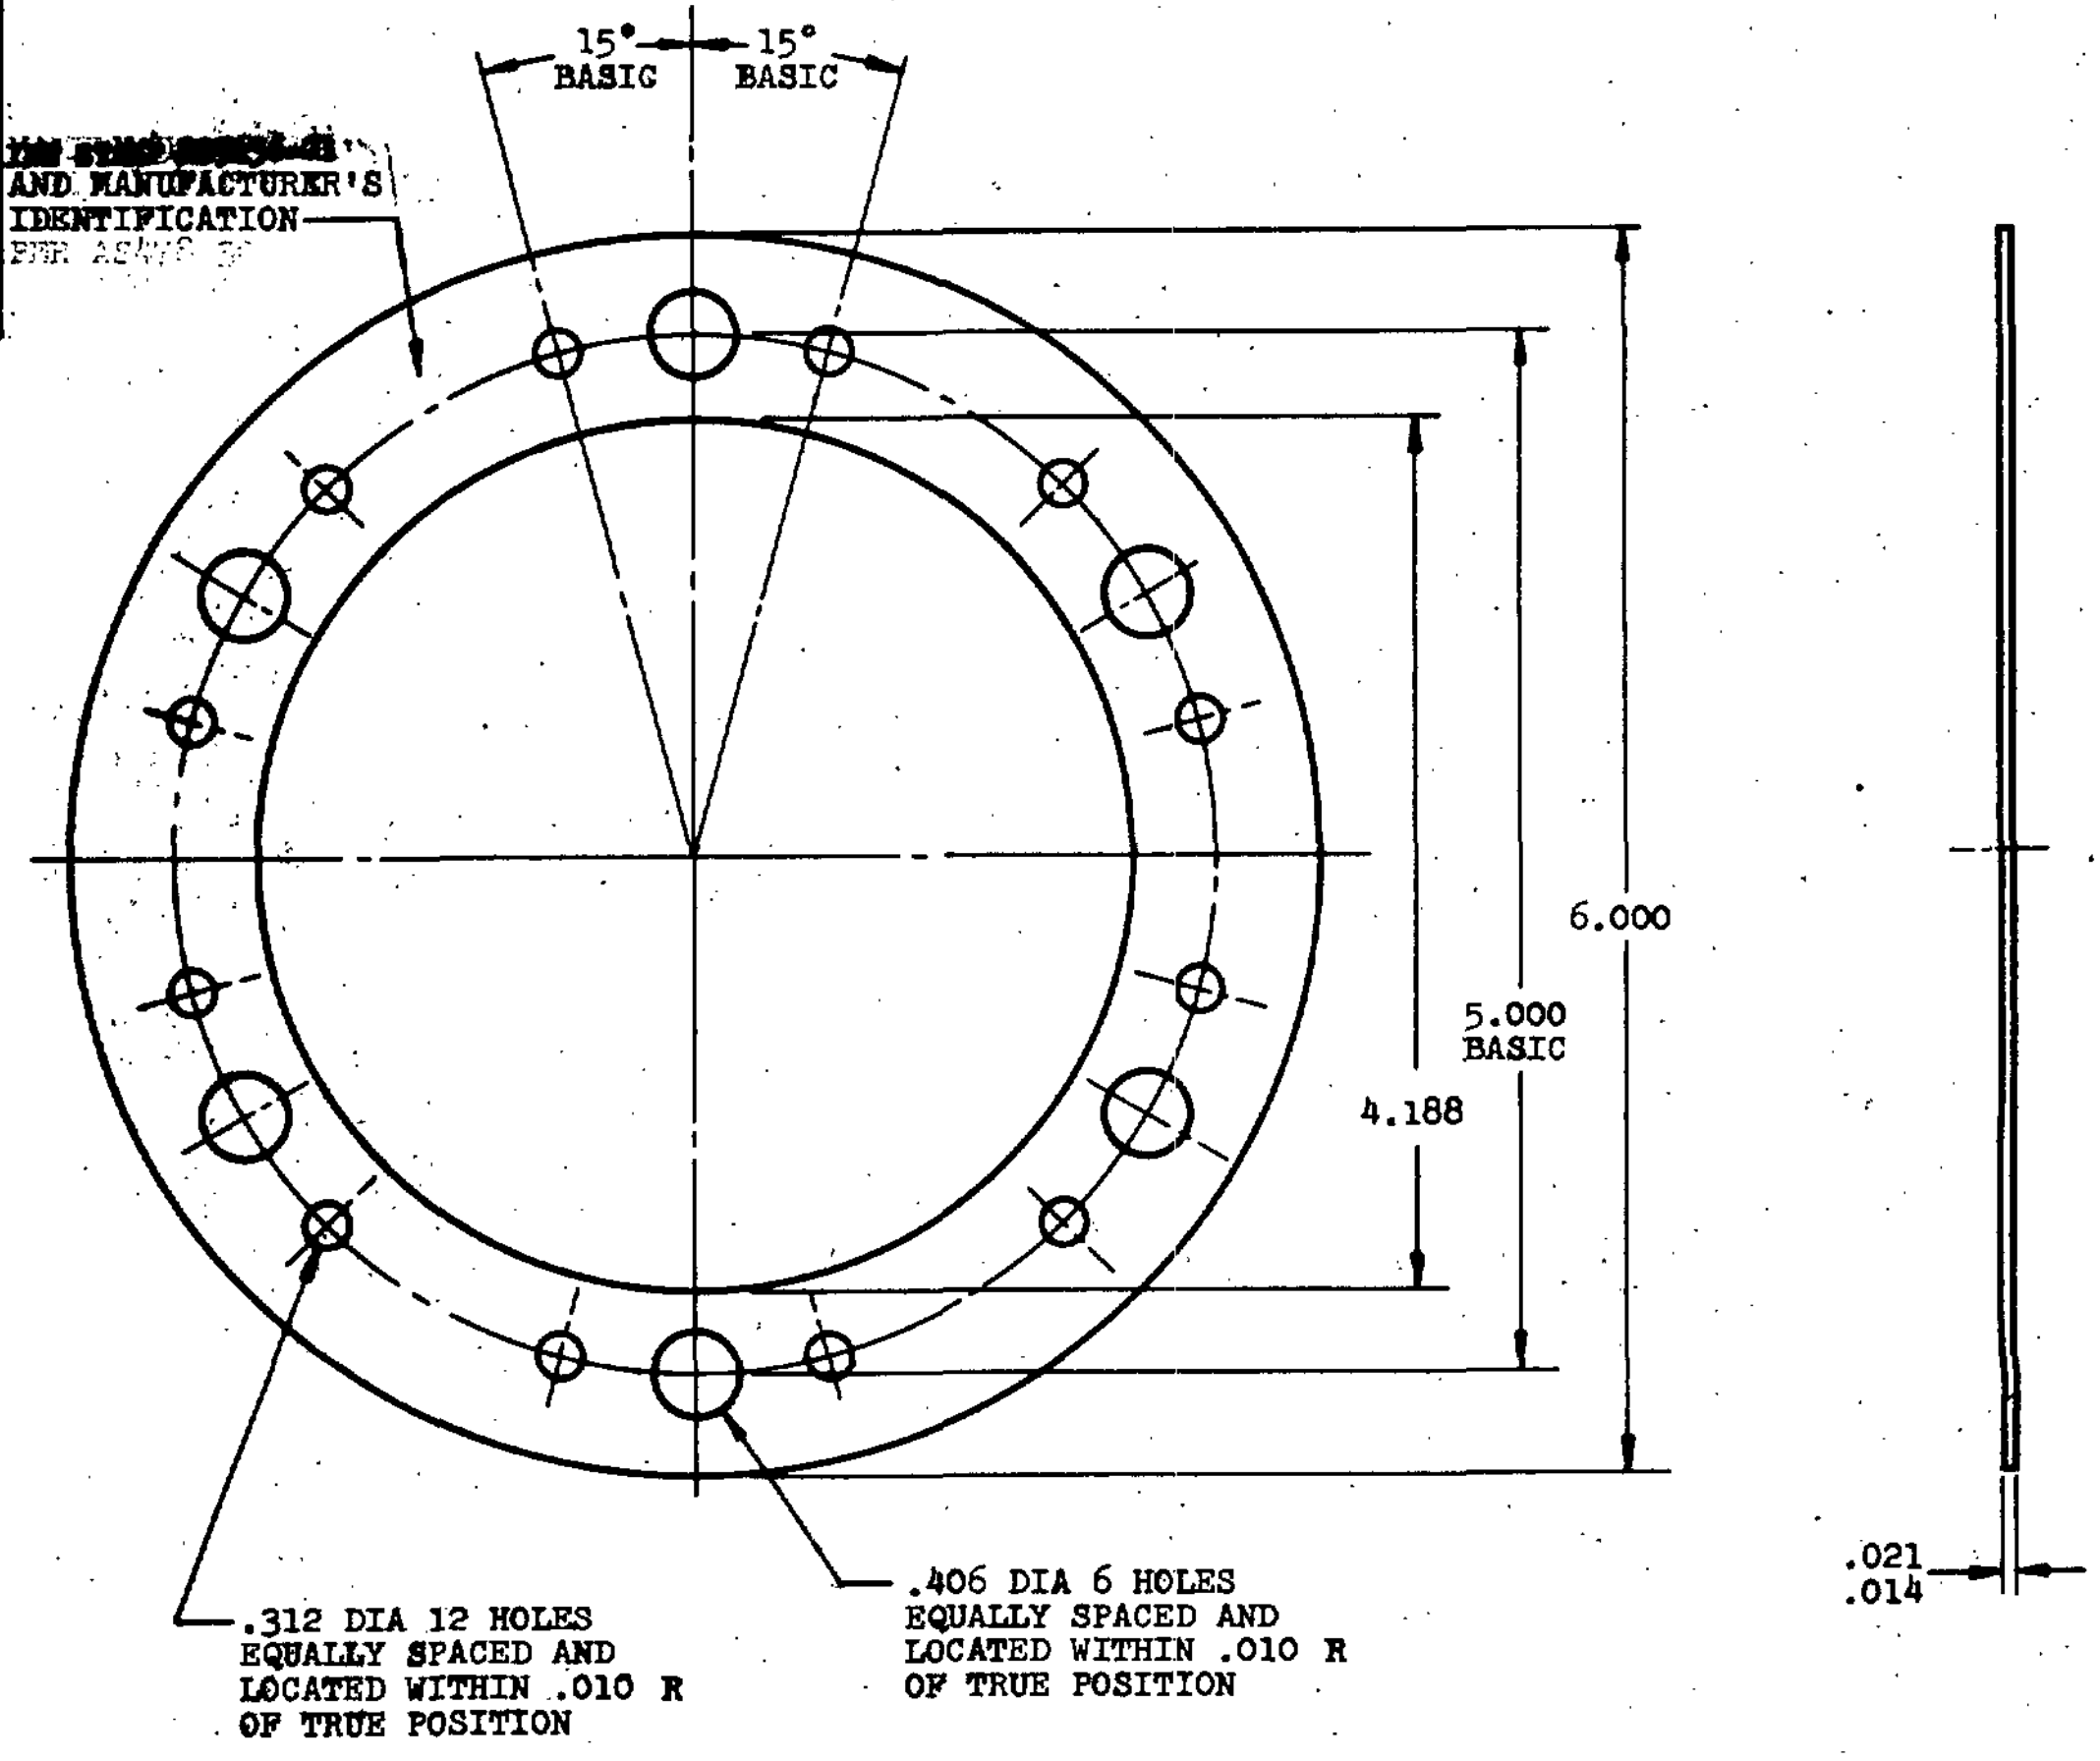
[illegible]
AND MANUFACTURER'S
IDENTIFICATION
PER AS478 [illegible]
15°
BASIC
15°
BASIC
6.000
5.000
BASIC
4.188
.312 DIA 12 HOLES
EQUALLY SPACED AND
LOCATED WITHIN .010 R
OF TRUE POSITION
.406 DIA 6 HOLES
EQUALLY SPACED AND
LOCATED WITHIN .010 R
OF TRUE POSITION
.021
.014

PART NO.	APPROX WT LB EA
MS9136-01	.018

1. MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232
2. EDGES SHALL BE CLEAN CUT.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010,
4. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

REVISED

APPROVED 22 Jun 65

Review activities:
USAF - 11, 71
Navy - WP
Army - MO

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all [illegible] applications and for repetitive use shall be made from this standard.

P.A. USAF - 11 Other Cust Navy - WP Army - MO	TITLE GASKET - TYPE XII, XIV-A, XIV-B, XIV-E, XVII-A AND XVII-B ENGINE ACCESSORY DRIVE	MILITARY STANDARD MS9136
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN4047	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2995-0003-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.