
MILITARY SPECIFICATION SHEET

CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-MACHINE SCREW), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-C-5501.

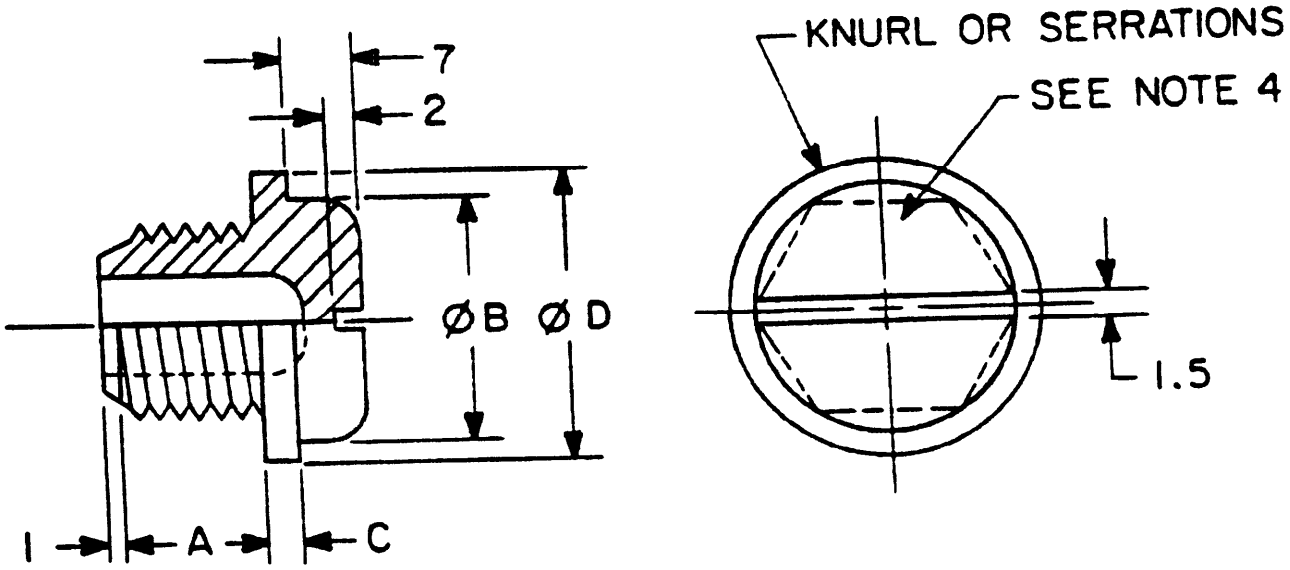

PLUG

NOTES:
1. All dimensions are in millimeters.

FIGURE 1. CAPS AND PLUGS, PROTECTIVE, DUST AND MOISTURE SEAL (PLUG-MACHINE SCREW), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Flexible plastic and rigid plastic (see general specification).

2. Tolerances: Tolerances shall be ±0.5.


3. Threads: Standard fine pitch "M" profile tolerance 6g, in accordance with FED-STD-H28/21. Acceptablity of screw threads shall be in accordance with FED-STD-H28/20, system 21.

4. These plugs shall be suitable for use with machine screw threads.

5. Knurl or hexagon configuration at option of manufacturer.

6. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from TABLE I.

EXAMPLE: D5501/27F1



D5501/27F1 indicates- Caps and Plugs Protective Dust and Moisture Seal (Plug-Machine Screw), Metric; Flexible plastic plug, Thread M6 X 1.

D5501/27R1 indicates- Same as above except Rigid plastic plug; Thread M6 X 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (PLASTIC PLUGS)

DASH NUMBER		THREAD	A THREAD LENGTH	ØB HEAD	C SHOULDER THICKNESS	ØD SHOULDER
RIGID	FLEXIBLE					
R1	F1	M6 x 1	8	10	2.0	13
R2	F2	M8 x 1	8	10	2.0	13
R3	F3	M10 x 1	8	12	2.0	16
R4	F4	M12 x 1.25	8	13	2.3	18
R6	F6	M14 x 1.5	10	14	2.5	19
R8	F8	M15 x 1.5	10	15	3.0	21
R10	F10	M16 x 1.5	10	16	3.0	22
R11	F11	M20 x 1.5	10	20	3.0	25
R12	F12	M22 x 1.5	10	20	3.0	27
R13	F13	M25 x 1.5	10	20	3.0	30
R14	F14	M27 x 2	10	20	3.0	32
R15	F15	M30 x 2	10	20	3.0	33
R16	F16	M32 x 2	10	25	3.0	37
R17	F17	M33 x 2	10	25	3.0	38
R18	F18	M36 x 2	10	25	3.0	40
R19	F19	M42 x 2	13	25	3.0	48
R20	F20	M48 x 2	13	25	3.0	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 82

Review activities:
Army - AV, ER, GL
DLA - IS

User activities:
Army - AT, ME, MI
Navy - MC, OS, SH, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5340-1765)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:57Z
Check the source to verify that this is the current version before use.