MIL-F-5508B
14 ARIL 1964

SUPERSEDING
MIL-F-5508A
23 MARCH 1950

MILITARY SPECIFICATION

FUSES, AIRCRAFT AUTOMATIC QUANTITY-MEASURING, HYDRAULIC

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers aircraft automatic quantity-measuring hydraulic fuses for use in Type I aircraft hydraulic systems.

1.2 Classification. Aircraft automatic quantity-measuring hydraulic fuses shall be furnished in one class only; for use in 3000 psi hydraulic systems at temperatures from minus 54° c. to plus 71°c. (minus 65°F. to plus 160°F.), and with the following two types of operating characteristics:

(a) The fuse shall be capable of resetting itself without reverse flow.
(b) The fuse must have reverse flow in order to reset itself.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of imitation for bids, shall form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-C-320 —Chromium Plating (Electrodeposited)
QQ-P-416 —Plating, Cadmium (Electrodeposited)
QQ-Z-325 —Zinc Coating (Electrodeposited)
PPP-B-601 —Boxes, wood, seated
PPP-B-621 —Boxes, Wind, Nailed and Lock-Corner
PPP-B-636-Boxes. Fiberboard

MILITARY

MIL-P-116 —Reservation, Methods Of
MIL-H-5440-Hydraulic systems, Types I and II, Design, Installation and Data Requirements for
MIL-P-5501 -Caps and Plugs, Protective, Dust and Moisture Seal
MIL-P-5514 —Packings, Installation and Gland Design, Hydraulic, General Specification for
MIL-P-5517 —Plastic Parts in Aircraft Hydraulic Equipment, General Tests for
MIL-H-5606 -Hydraulic Fluid, Petroleum Base, Aircraft and Ordinance
MIL-H-6083-Hydraulic Fluid, Petroleum Base, Preservative
MIL-I-6868 --Inspection process, Magnetic Particle
MIL-P-7936 —Parts and Equipment, Aeronautical, Preparation for Delivery

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

MIL-H-8775-Hydraulic System Components, Aircraft and Missiles, General Specification for

STANDARDS

MIL-STD-129--Marking for Shipment and Storage

DRAWINGS

Air Force--Navy AERONAUTICAL

AN6281 —Fuse--Hydraulic Quantity-Measuring, Class 3000

AN6282 —Fuse--Hydraulic Quantity-Measuring, Class 3000

AND10050 —-Bosses--Standard Dimensions for Gasket Seal Straight Thread

PUBLICATIONS

AIR FORCE--NAVY AERONAUTICAL SPECIFICATION BULLETIN
No. 438--Age Controls for Synthetic Rubber Parts

3. REQUIREMENTS

3.1 General requirements. The requirements of Specification MIL-H-8775 apply as requirements of this specification. Where the two specifications conflict, this specification shall govern.

3.2 Qualification. The fuse furnished under this specification shall be a product which has been tested, arid passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.3 Materials.

3.3.1 Non-metallic packings and seals. The use of non-metallic packings on moving parts shall be kept to a minimum. If used, non-metallic seals and their installation shall be in accordance with Specification MIL-P-5514.

3.3.2 Steel parts. Unless otherwise specified, all steel parts except those in constant contact with hydraulic fluid shall be cadmium plated in accordance with Specification QQ-P-416 zinc plated in accordance with Specification QQ-Z325, or chromium plated in accordance with Specification QQ-C-320.

3.3.3 Plastic parts. Plastic parts used in hydraulic fuses shall be capable of meeting the test requirements of Specification MIL-P-5517.

3.4 Design and construction.

3.4.1 General design. The design of automatic quantity-measuring hydraulic fuses shall conform to applicable AN standards and be such as to offer the minimum restriction to flow in the open position, smallest size, and minimum weight consistent with the other requirements of this qualification.

3.4.2 Shape and dimensions. Hydraulic fuses as specified in 1.2(a) shall conform to AN6281. Fuses as specified in 1.2(b) shall conform to AN6282.

3.4.3 Tube connections. All tube connections for fuses shall be of the internal type, straight-threaded, conforming to Drawing AND110050.

3.5 Performance.

3.5.1 Rate of flow. The rated flow for each size fuse shall be in accordance with the requirements of Specification MIL-H-5440 for the line size represented.

3.5.2 Temperature range. Hydraulic fuses shall be designed to operate over a temperature range from minus 54° C. to plus 71°C; (minus 65° F. to plus 160°F.).

3.6 Magnetic particle inspection. All magnetizable highly-stressed parts shall be subjected to magnetic inspection in accordance with Specification MIL-I-6868. Where necessary such inspection shall be called for on the manufacturer's drawings. Cracks or other injurious defects disclosed by magnetic inspection shall be cause for rejection.

3.7 Operational marking. All fuses shall be clearly marked with arrows noting direction of flow for closing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

3.8 Age controls. Age-sensitive elastomeric parts shall be in accordance with ANA Bulletin No. 438.

4. QUALITY ASSURANCE PROVISIONS

4.1 Rsponsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of hydraulic fuses shall be classified as folllows:

(a) Qualification tests
(b) Acceptance tests

4.3 Test conditions.

4.3.1 Test fluid. The hydraulic fluid used for all qualification tests shall conform to Specification MIL-H-5606. Acceptance tests may be performed with oil conforming to Specification MIL-H-5606 or MIL-H-6083.

4.3.1.1 The test fiuid shall be continuously filtered through a filter element which is equivalent to a 25-micron absolute standard filter element. The filter and element used shall be satisfactory for the temperature range encountered, and cleaned or changed regularly to avoid clogging.

4.3.2 Temperature. Except where otherwise specified, tests shall be conducted at a room temperature of approximately 210 C. to 32°c. (70°F. to 90° F.) and an oil temperature of approximately 32° C. to 43° C. (90°F. to 110°F.). The oil temperature during tests shall be recorded.

4.4 Qualification tests.

4.4.1 Test samples. Qualification tests shall be conducted on two samples of hydraulic fuses unless otherwise specified.

4.4.1.1 Minimum clearance sample. One of the hydraulic fuses to be tested shall be assembled of parts which have been selected to provide that the clearance with regard to linear and diametral tolerances between moving and non-moving members, conducive to malfunctioning at extreme temperatures, will not exceed 110 percent of the minimum designed clearance permitted by the manufacturer’s drawings. For cases of sliding where packing friction would influence the performance of the component, such as pistons operated by springs, etc, the maximum packing friction anticipated shall be induced in the test specimen. In these casees, “0” ring packing glands shall be designed to provide maximum “0” ring squeeze, including the effect of adverse “0” ring cross section tolerances and high swell fluids. This specimen shall be marked "MTN”.

4.4.1.2 Maximum clerance sample. The second specimen shall be assembled of parts which have been selected to provide that the tolerances, with regard to linear, diametral and concentric tolerances between moving members, coonducive to malfunctioning as a result of wear associated with prolonged operation, will not be less than 90 percent of the maximum designd clearance permitted by the manufacturer’s drawings. This specimen shall be marked "MAX”.

4.4.1.3 The manufacturer shall apply all tests of this specification to the MAX sample, with the exception of the high- and low-temperature functioning tests. The MIN sample shall be subjected to the temperature functioning test and acceptance test set forth in this specification.

4.4.2 Test report and data. Upon satisfactory completion of the tests performed according to 4.4.1.3, the manufacturer shall forward one copy of a report of these tests and one set of prints of detail and assembly drawings to the preparing actitity, together with a letter stating vendor's desire to obtain qualification tests. Upon acceptance of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

report and drawings by the cognizant agency, notice of authorzation of qualification tests and shipping instruction for the MIN and MAX samples will be forwarded to the manufacturer. An additional copy of the test report and drawings shall accompany the sample units.

4.5 Acceptance tests. The acceptance tests and consist of individual tests and sampling tests.

4.5.1. Individual tests. Each hydraulic fuse submitted for acceptance under contract shall be subjected to the following tests, as described in 4.6:

(a) Examination of product
(b) Proof pressure
(c) Leakage
(d) Volumetric Capacity

4.5.1.1 In addition, the fuses may be subjected to any of the other tests specified herein which the inspector considers necessary to determine conformance with any of the requirements of this specification.

45.2 sampling tests. Unless otherwise specified, three fuses which have passed the individual tests, shall be selected at random from each lot and shall be subjected to one or more of the following teds:

(a) Immersion
(b) Pressure drop
(c) Extreme temperature Operation
(d) Endurance
(e) Acceleration
(f) Bleeding
(g) Resetting
(h) Burnt pressure

Samples from the first lot and every 10th lot thereafter shall be subjected to all of the above tests. The lot shall be rejected if any defect is found in the sample. Fuses in quantities of not greater than 100 and offered for delivery at approximately the same time shall be considered a lot. A sample shall be defined as three fuses selected at random from a lot.

4.5.2.1 Rejection criteria. If any defect is found in a sample the contractor shall:

(a) Determine the cause of the defect.
(b) Take the necessary action to prevent recurrence of the defect.
(c) Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.
(d) Select six additional fuses at random from the same lot and subject them to the acceptance tests of 4.5. The lot will be accepted if no &.feet is found. If any defect is found in the sample, the remainder of the lot shall be rejectd and the disposition of the lot shall be determined by the procuring activity.

4.6 Test methds.


4.6.l Examination of product Each hydraulic fuse shall be carefully examined to determine conformance with this specification with respect to material, workmanship, marking, any visible defects and conformance with applicable drawings.

4.6.2 Immersion. Fuses containing plastic parts shall be subjected to the immersion tests described in Specification MIL-P-5517.

4.6.3 Proof pressure. Hydraulic pressure, as specified, shall be applied to the automatic quantity-measuring hydraulic fuse by means of a hand pump. Pressure shall be maintained for a period of five minutes. The fuse shall withstand a hydrostatic test pressure of 1.50 times the rated pressure without evidence of external leakage, failure, distortion or permanent act.

4.6.4 Leakage. When the fuse is closed, pressure is to be applied to the upstream side of the fuse. The leakage measurement shall consist of the last three minutes of a five-minute period. Leakage through the fuse shall not exceed 15 cc per hour (approximately five drops per minute), at any pressure from 40 psi to 150 psi, and leakage shall not exceed 1/2 cc per hour (approximately 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

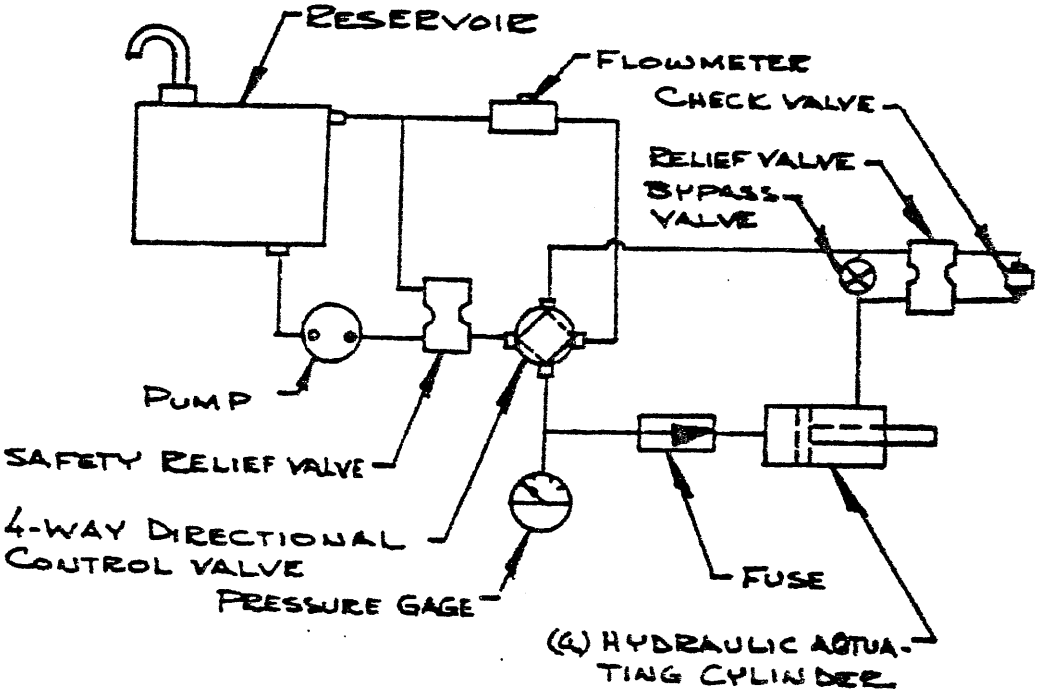

(a) Piston Rod Extension To Be Calibrated To Enable Determination of Quantity of Fluid Passed Through The Fuse.

FIGURE 1. *Typical installation for bleeding and volumetric capacity tests.*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

drops per hour) at any pressure over 150 psi to rated pressure. For qualification tests the fuse shall be tested at pressures of 40, 80, 150 psi, 50 percent of rated pressure, and 100 percent of rated pressure. For acceptance tests, each fuse shall be tested at 40 psi and rated pressure.

4.6.5 Volumetric capacity. The fuse shall be installed substantially as shown in figure 1.

4.6.5.1 Qualification tests. Qualification tests for volumetric capacity shall be conducted with unrestricted flow and at rated pressure as follows:

(a) Flow Shall be passed through the fuse at 1/10 gpm, and the volume of fluid passed through the fuse before the fuse closes shall be measured. For fuses requiring reverse flow for resetting, the flow shall & reversed. The Volume of fluid passed shall be within -the limits specified in figure 7.

(b) The test shall be repeated for the percentages of rated flow and the volume of fluid passed shall be within the limits specified in Figure 7.

(c) An eight-hour test shall be conducted to verify that the fuse shall not dose at flow rates less than 0.02 gpm.

4.6.5.2 Acceptance tests. All fuses shall be testd at flows of 1/4 gpm and 200 percent of rated flow, and the volume of fluid passed shall be within the limits specified in Figure 7. These tests for volumetric capacity shall be conducted with unrestricted flow.

4.6.5.3 Volumetric capacity of fuses. The rated volumetric capacity of fuses shall be 10, 20, 40, 60, 80, 120, 160, 200 and 250 cubic inches as applicable. Tube size shall be 1/2 inch.

4.6.6 Pressure drop. With the apparatus set up as shown in Figure 2, the pressure flow shall be measured on both the closing and resetting diretions with unrestricted flow in the circuit and with flow restricted to obtain normal working pressure in the fuse. Pressure drop shall be determined at flow rates of 25 percent, 50 percent, 100 percent and 200 percent of rated flow. The pressure drop through the fuse in either the closing or resetting direction shall not exceed 25 psi at the rated flow for the fuse.

4.6.7 Extreme temperature operation. The automatic quantity-measuring hydraulic fuse shall operate to shut off or to establish flow when operated at any temperature from minus 54°C. to plus 70°C. (minus 65°F. to plus 160°F.). Extreme temperature tests shall be conducted on the sample fuse assembled of parts with tolerances most conducive to binding at the temperature tested and shall be performed as noted below on an installation set up substentially in accordance with Figure 5.

(a) High Temperature. The fuse shall be subjected to leakage tests and tests for volumetric capacity at flow rates of 1 gpm, 25 percent of rated flow capacity, and 100 percent of rated flow capacity after exposure to the specified high temperature for a period of six hours. Fluid and air temperature shall not exceed the specified herein, and the volumetric capacity shall be within the limits specified in Figure 7.

(b) Low temperature. The tests specified above for high temperature shall be repeated except that the fuse shall be exposed to the low temperature for a period of 72 hours. The fluid and air temperature shall be maintained at the required valves during the test. Leakage shall not exceed that specified herein and the volumetric capacity shall be within the limits specified in Figure 7.

(c) Rapid warm-up. The low temperature test set up shall be allowed to warm up rapidly to room temperature and at least five cycles of

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:00Z
Check the source to verify that this is the current version before use.

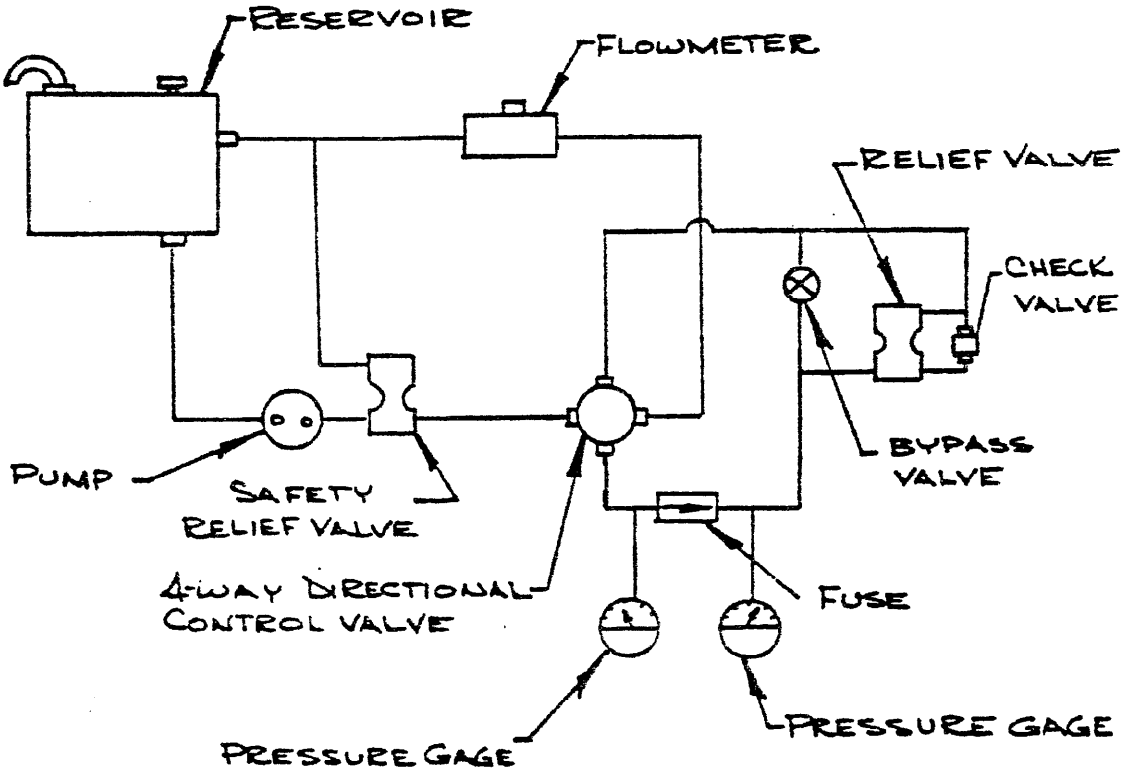


FIGURE 2. *Typical installation for flow tests.*

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:00Z
Check the source to verify that this is the current version before use.

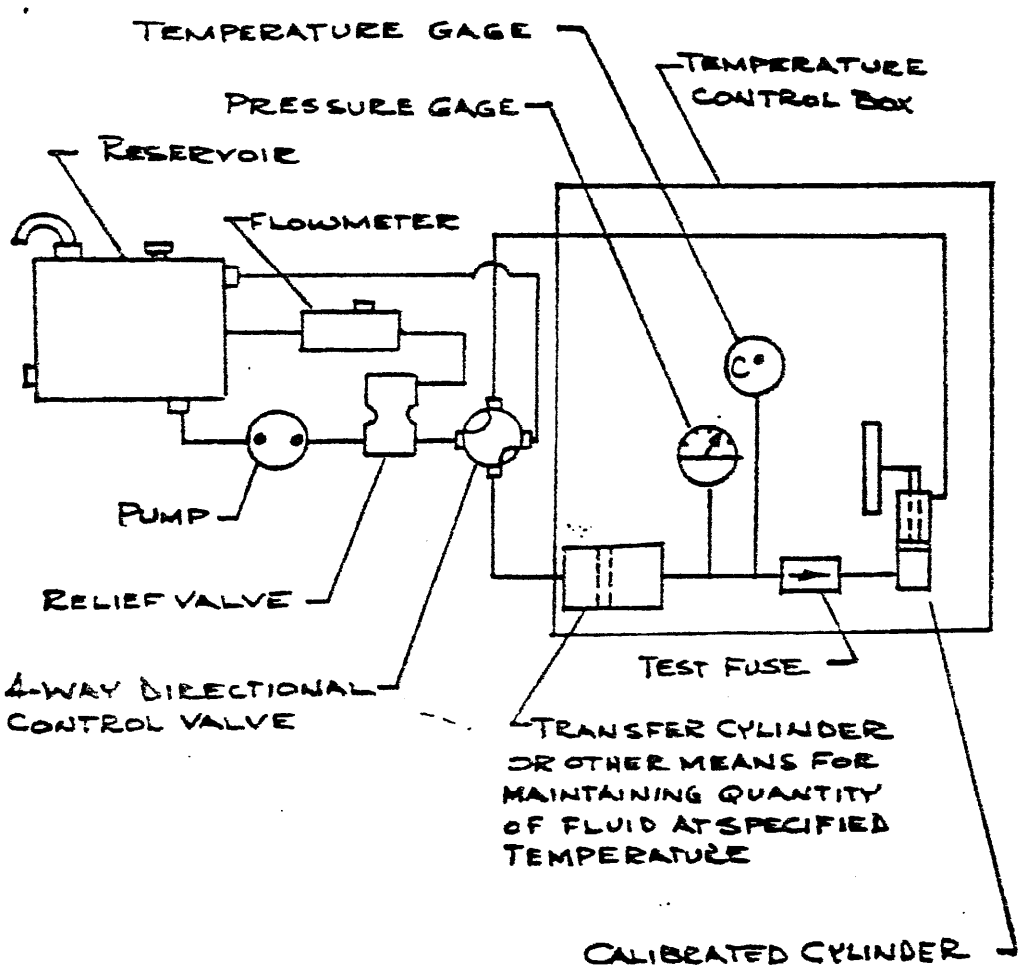


FIGURE 3. *Typical installation for extreme temperature tests.*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

operation shall be made during the warm-up period at approximately equal increments of time. The volumetric capacity shall be within the limits specified in Figure 7. The length of tubing required between the transfer cylinder and the fuse, to aid fluid temperature stabilization and to forestall inadvertent closing of the fuse, shall be 12 feet (1/2 inch O.D.-See Figure 3). This length of tubing shall be speified on the manufacturer's installation drawings.

4.6.8 Endurance. The fuse shall be installed in a set-up substantially in accordance with Figure 4 and subjected to 20,000 cycles of operation, each cycle to consist of passage of at least 90 percent of the rated volumetric capacity in the closing direction with the fluid at rated pressure (and reversal of flow to fully reset the test fuses, where applicable). The means of limiting fluid volume shall then be removed and 100 additional cycles of full closing and resetting shall be accomplished, the closing pressure to be the rated pressure.

4.6.9 Acceleration. The apparatus shall be set up as shown in Figure 5.

(a) With the fuse bled and in the open position and installed in a direction so that acceleration will tend to close it, an acceleration of 12 g's shall be developed by the mechanism. Rated flow shall be applied through the fuse after a minimum time of two seconds at the acceleration. The volumetric capacity shall not vary from the Emits specified herein.

(b) With the fuse mounted in a direction so that acceleration will tend to open it, 40 psi pressure shall be applied on the fuse in a closed position. An acceleration of 12 g's shall be developed and held for a minimum period of two seconds and then stopped. The fuse shall not show any leakage in excess of that specified herein, as observed by movement of the actuating cylinder piston.

4.6.10 Bleeding. The fuse shall be installed substantially as shown in Figure 1 with the fuse completely void of fluid and without bleeding. Rated flow shall be directd through the fuse in the direction for closing. The quantity of fluid passed through the fuse before closing shall be measured. The fuse shall pass its volumetric capacity without preliminary bleeding.


4.6.11 Resetting. The apparatus shall be set up as shown in Figure 6.

4.6.11.1 For fuses which do not require reverse flow for resetting, the relief valve shall be set at rated pressure and flow shall be passed through the fuse until it closes. Rated pressure shall then be applied to the downstream side of the fuse while maintaing pressure on the upstream side for a maximum of five seconds, following which rated flow shall be passed through the fuse. The fuse shall folly reset itself within a five-second period without the aid of reserve flow. The quantity of fluid passed through the fuse before it closes shall be measured and shall be within the limits specified herein.

4.6.11.2 For fuses which require reverse flow in order to reset themselves, the relief valve shall be set at rated pressure and flow shall be passed through the fuse until it fully closes. The fuse shall fully reset itself after passage of a maximum of eight cubic inches or 20 percent of the rated volumetric capacity (whichever is greater) in the reverse flow direction at rated flow capacity. Rated flow shall then be applied through the fuse in the direction for closing. The quantity of fluid passed before the fuse closes shall be measured and shall be within the limits specified herein.

4.6.12 Burst pressure. The hydraulic fuse shall withstand, without rupture, a hydrostatic pressure equal to 2.5 times the rated pressure. The pressure shall be gradually


Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

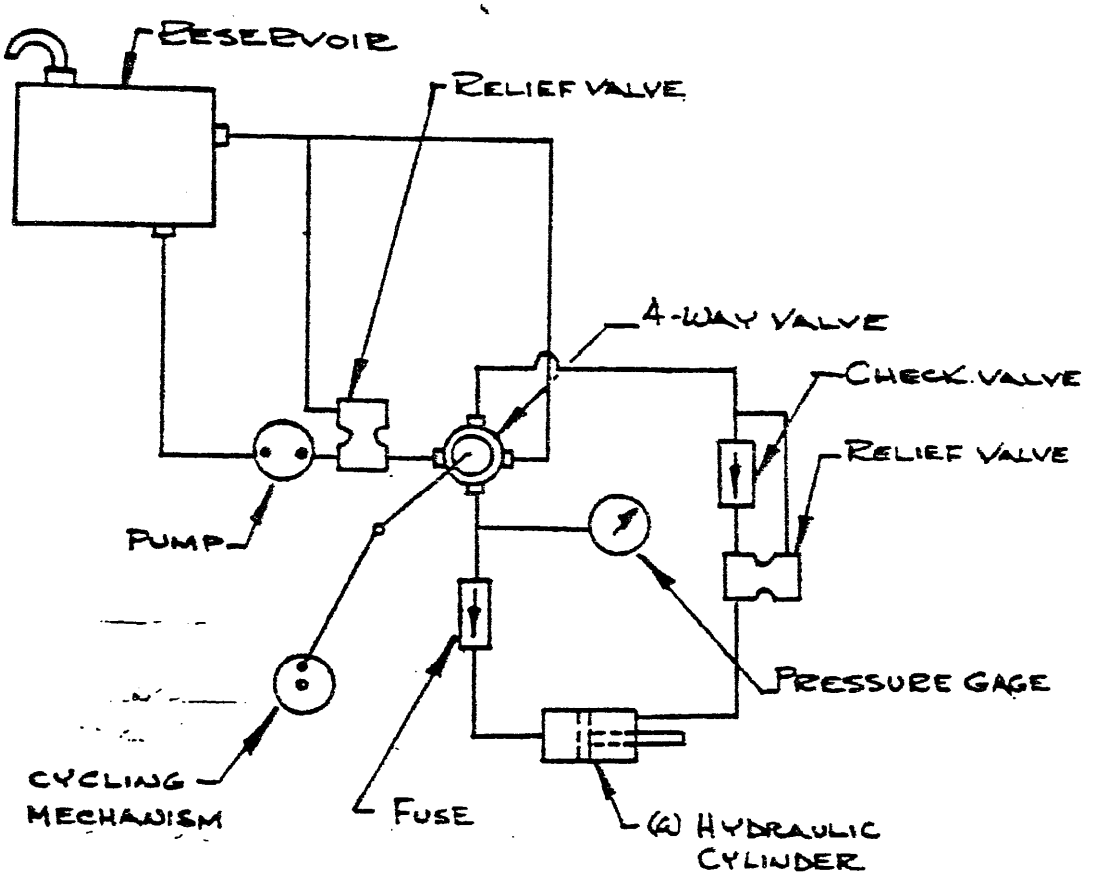

(a) HYDRAULIC CYLINDER OR OTHER MEANS TO BE USED FOR CONTROL OF FLUID VOLUME THROUGH THE FUSE DURING 20000 CYCLE TEST. IF CYLINDER IS USED, STOPS CAN BE PROVIDED TO LIMIT VOLUME TO DESIRED FLOW.

FIGURE 4. *Typical installation for endurance test.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

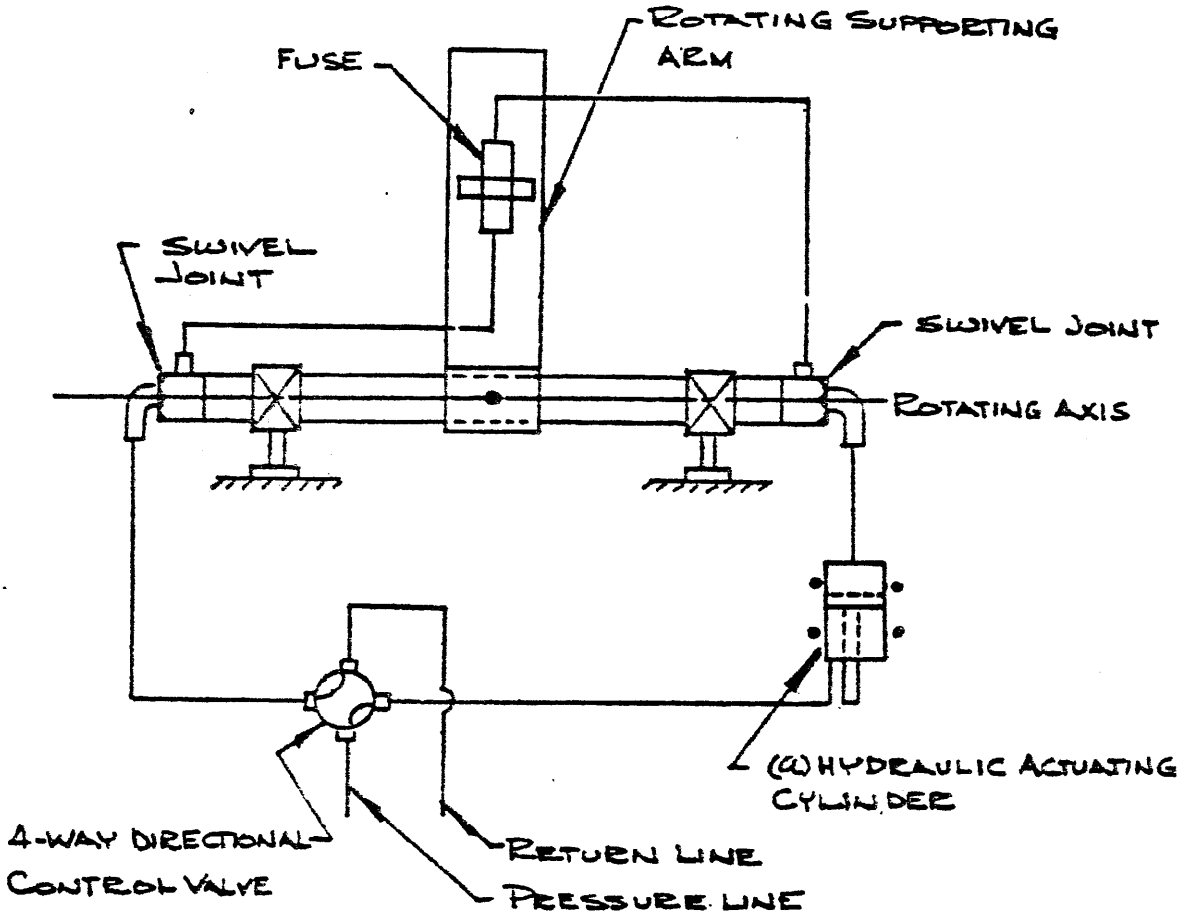

(a) PISTON ROD EXTENSION CALIBRATED TO ENABLE DETERMINATION OF QUANTITY OF FLUID PASSED THROUGH THE FUSE.

FIGURE 5. *Typical installation for acceleration test.*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

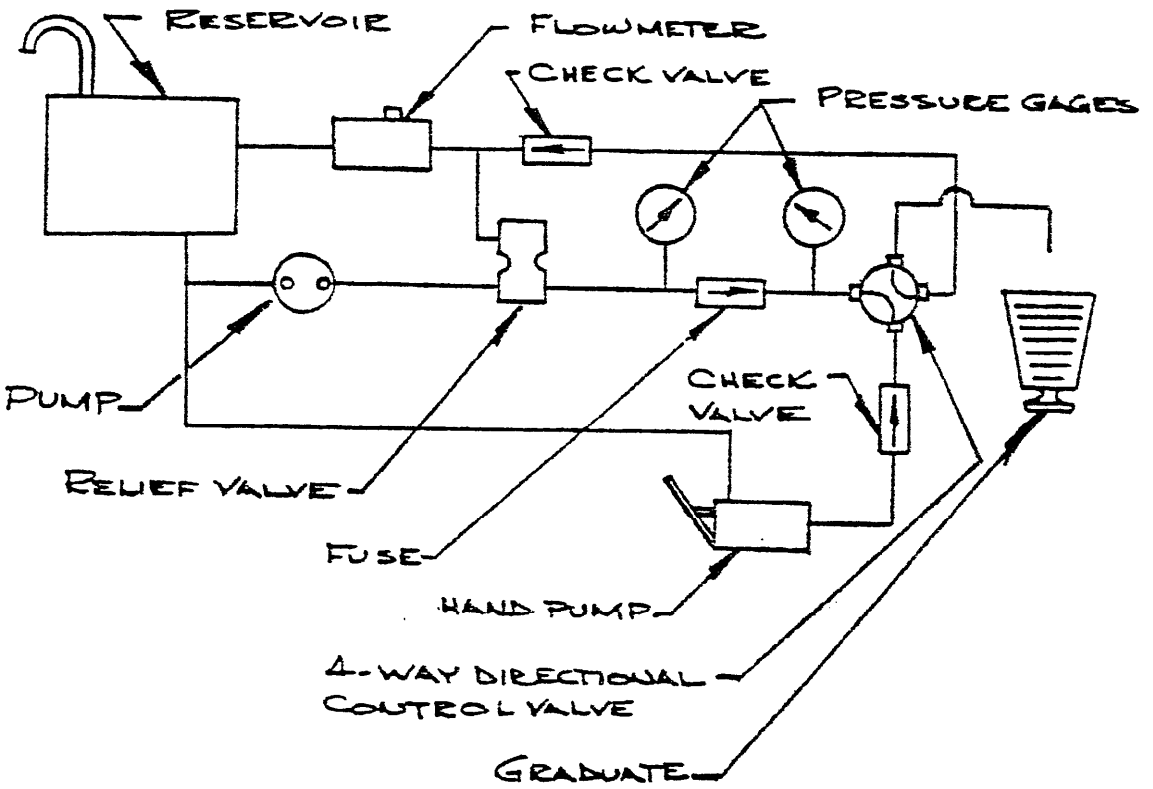


FIGURE 6. *Typical installation for reset test—AN6281 fuse.*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

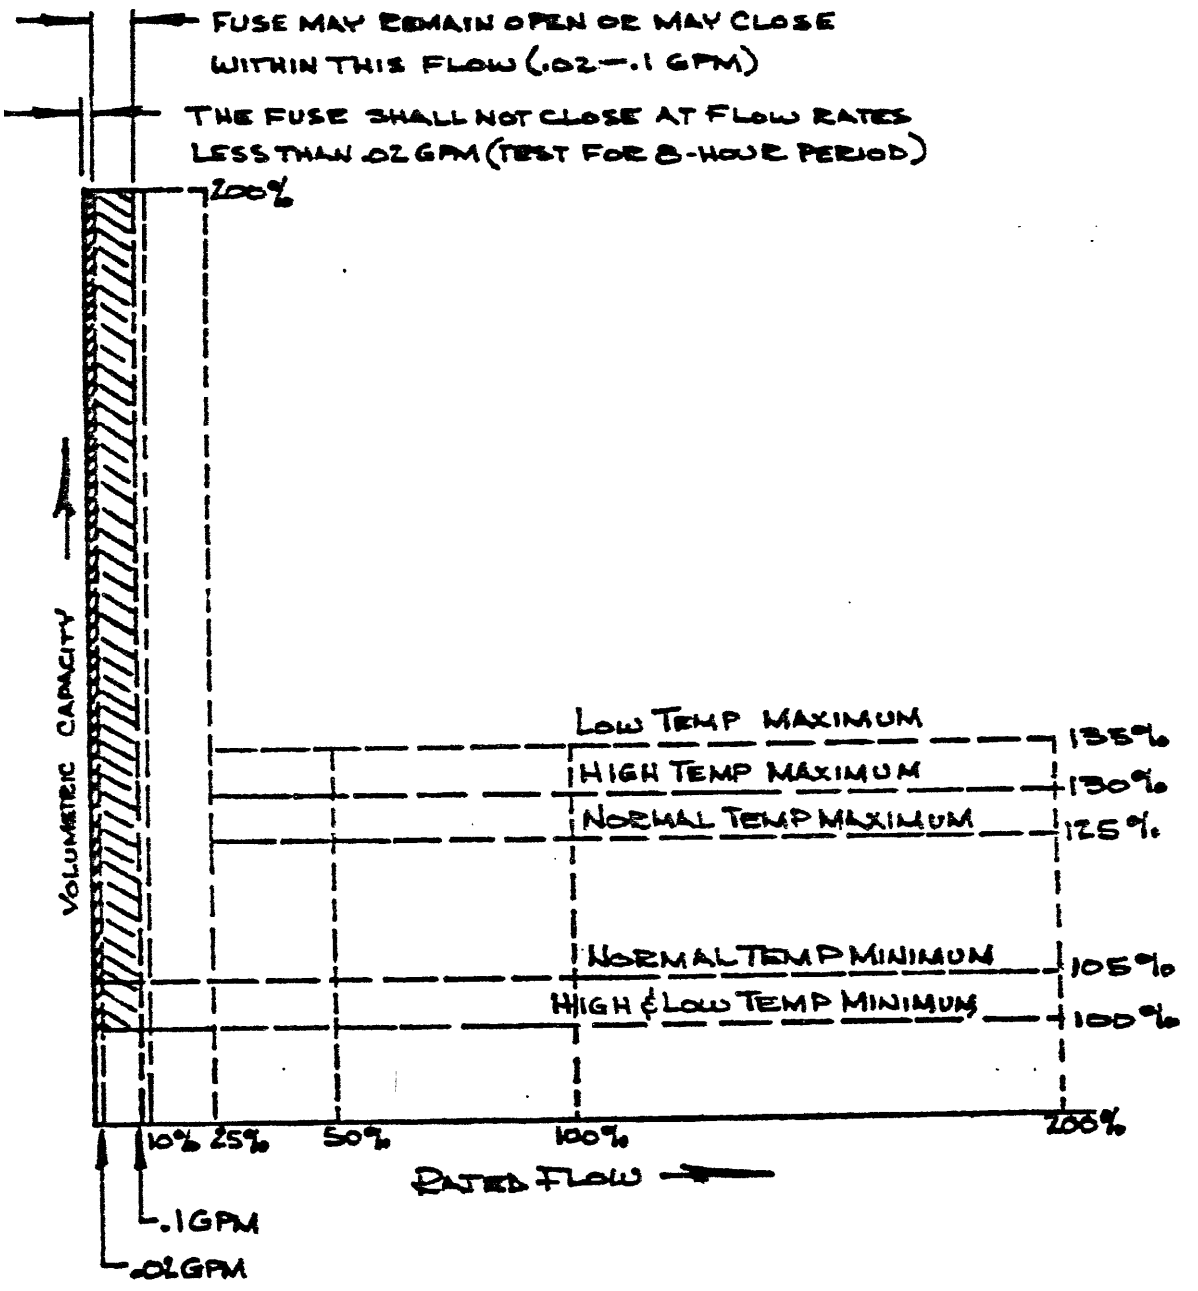


FIGURE 7. *Volumetric capacity limitations.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

increasd until the specified burst pressure is reached. The pressure rise shall be $25{,}000 \begin{smallmatrix} +\ 0 \\ -\ 10{,}000 \end{smallmatrix}$ psi per minute.

4.7 Internal treatment. Following inspection, sampling, and test procedures specified above, each fuse shall be internally flushed with hydraulic preservative oil conforming to Specification MIL-H-6083 and all ports shall be capped and plugged with closures conforming to Specification MIL-C-5501 to prevent on leakage.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (see 6.2).

5.l.1 Level A. Unless otherwise specified in the contract or order, each fuse shall be individually preserved and packaged in accordance with Specification MIL-P-7936. The method of preservation shall conform to method IA of Specification MIL-P-116.

5.1.2 Level C. Each fuse shall be preserved and packaged in a manner which will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity for immediate use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Fuses packaged as specified in 5.2 shall be packed in snug-fitting cleated plywood boxes conforming to Speecification PPP-B-601, overseas type, using Type II, Class 2 plywood, nailed wood boxes conforming to Class 2 of Specification PPP-B-621, or fiberboard boxes conforming to Type I, Class 1 of Specification PPP-B-636. Closures and strapping shall conform to the appendix of the applicable specification.

5.2.3 Level C. Fuses packaged as specified in 5.1 shall be placed in shipping containers prepared for delivery in such a manner so as to insure carrier acceptance and safe delivery at the destination. Containers shall be in accordance with uniform freight classification rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contractor, marking shall be in accordance with Military Standard MIL-STD-129 and ANA Bulletin No. 438.

6 NOTES

6.1 Intended use. Automatic quantity-measuring hydraulic fuses are Valve-like safety devices used in aircraft hydraulic lines to prevent loss of hydraulic fluid from the system when the lines are ruptured or fail for any reason. Fuses meeting the rquirements of this specification are for use in hydraulic systems containing only hydraulic oil conforming to specification MIL-H-5606 and are not qualified for use with other types of fluids.

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title number, and date of this specification.

(b) Applicable AN and manufacturer's part number.

(c) Level of packaging and packing required (see section 5).

6.3 Qualification. With respect to products requireing qualification, awards will be made for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion on the applicable qualified products list, whether or not such products have been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer the Federal Government tested for qualification in order that they be eligible to be awarded conracts or orders for the products covered by this specification. Information pertaining to qualification of products covered by this Speculation may be obtained from Oklahoma City Air Materiel Area (OCNE), Tinker AFB Oklahoma.

Notice. When Govenrnment drawings, specifications orr other data are used for any purpose other tha in connection with a definitely related Government pro-

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.

curement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corpooration, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army-MO)
Navy-WP
Air Force-71
Reviewers:
Army-MO)
Navy-WP
Air Force-11, 71

Preparing activity:
Air Force—71
Project No. 1558-0059

"Review/user information is current as of the day of this document. For future coordination of changes to this document, draft circulation should be tied on the information in the current DODISS."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
3. DOCUMENT TITLE		

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY	
a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES:

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (*Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity*)

SUBMITTED BY (*Printed or typed name and activity*) | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:00Z
Check the source to verify that this is the current version before use.