INCH-POUND

MIL-DTL-5508C
14 November 2007
SUPERSEDING
MIL-F-5508B
14 April 1964

DETAIL SPECIFICATION

FUSES, AIRCRAFT AUTOMATIC QUANTITY-MEASURING, HYDRAULIC

Inactive for new design after 1 April 1996.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers aircraft automatic quantity-measuring hydraulic fuses for use in SAE AS8775 type I aircraft hydraulic systems.

1.2 Classification. Aircraft automatic quantity-measuring hydraulic fuses shall be furnished for use in 3,000 pounds per square inch (psi) hydraulic systems at temperatures from -65 °F to 160 °F (-54 °C to 71 °C).

1.3 Type. The type to be furnished shall be as specified (see 6.2).

Type I - Reset without reverse flow (AN6281)
Type II - Reset with reverse flow (AN6282)

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Richmond, ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at http://assist.daps.dla.mil/.

AMSC N/A FSC 1650


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

1.4 Size. The size of the rated volumetric capacity shall be as specified in table I (see 6.2).

TABLE I. Size - rated volumetric capacity.

Specification	AN dash number	Rated volumetric capacity (cubic inches)								
		10	20	40	60	80	120	160	200	250
AN6281	8	X	X	X	X	X	X	X	X	X
AN6282	8	X	X	X	X	X	X	X	X	X

1.5 Part or identifying number (PIN). The PIN to be used for fuses acquired to this specification is created as follows:

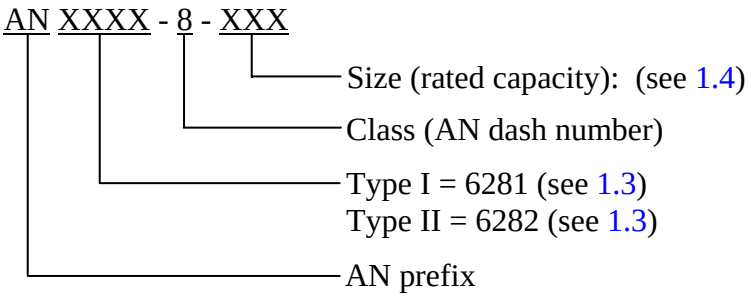

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of the documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications. The following specifications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-G-5514 - Gland Design; Packings, Hydraulic, General Requirements for.
MIL-PRF-5606 - Hydraulic Fluid, Petroleum Base; Aircraft, Missile, and Ordnance.
MIL-PRF-6083 - Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
AN6281 - Fuse - Hydraulic Quantity Measuring, Class 3000, Type I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATIONS (Continued)

AN6282	- Fuse - Hydraulic Quantity Measuring, Class 3000, Type II.
MIL-DTL-83488	- Coating, Aluminum, High Purity.

(Copies of these documents are available online at http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other government documents. The following other government document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

STANDARDIZATION DOCUMENTS

SD-6	- Provisions Governing Qualification.

(Copies of this document are available online at http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

NAS 847	- Caps and Plugs, Protective, Dust and Moisture Seal.
NAS 1638	- Cleanliness Requirements of Parts Used in Hydraulic Systems.

(Copies of these documents are available online at http://www.aia-aerospace.org/ or from Aerospace Industries Association, 1000 Wilson Boulevard, Suite 1700, Arlington, VA 22209-3901.)

ASTM INTERNATIONAL

ASTM B 633	- Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel.
ASTM E 1444	- Standard Practice for Magnetic Particle Testing.

(Copies of these documents are available online at http://www.astm.org/ or from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

SAE INTERNATIONAL

SAE AMS 2460	- Plating, Chromium.
SAE ARP 5316	- Storage of Elastomer Seals and Seal Assemblies Which Include an Elastomer Element Prior to Hardware Assembly.
SAE AS1933	- Age Controls for Hose Containing Age-Sensitive Elastomeric Material.
SAE AS5202	- Port or Fitting End, Internal Straight Thread, Design Standard.
SAE AS5440	- Hydraulic Systems, Aircraft, Design and Installation Requirements for.
SAE AS8775	- Hydraulic System Components, Aircraft and Missiles, General Specification for.

(Copies of these documents are available online at http://www.sae.org/ or from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 General requirements. The requirements of SAE AS8775 apply as requirements of this specification. Where the two specifications conflict, this specification shall govern.

3.3 Qualification. Fuses furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list (QPL) before contract award (see 4.3 and 6.3).

3.4 Materials.

3.4.1 Non-metallic packings and seals. The use of non-metallic packings on moving parts shall be kept to a minimum. If used, non-metallic seals and their installation shall be in accordance with MIL-G-5514.

3.4.2 Steel parts. Steel parts, except those in constant contact with hydraulic fluid, shall be coated with ion vapor deposited aluminum, where practicable, in accordance with MIL-DTL-83488, type I or type II, as applicable, and of a class that is adequate to achieve the degree of protection required. Steel parts may also be zinc plated in accordance with ASTM B 633 or chromium plated in accordance with SAE AMS 2460. Other protective coating, in lieu of any of

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

these standards, may be used if demonstrated to be satisfactory and approved by the cognizant engineering activity. Cadmium plating must be avoided when satisfactory alternative processes can be used.

3.5 Design and construction.

3.5.1 General design. The design of automatic quantity-measuring hydraulic fuses shall conform to the applicable specification sheet and offer the minimum restriction to flow in the open position, smallest size, and minimum weight consistent with other requirements of this specification.

3.5.2 Shape and dimensions. Type I hydraulic fuses shall conform to AN6281. Type II hydraulic fuses shall conform to AN6282.

3.5.3 Tube connections. All tube connections for fuses shall be internal type, straight-threaded, and conform to SAE AS5202.

3.6 Performance.

3.6.1 Rate of flow. The rated flow for each size fuse shall be in accordance with the requirements of SAE AS5440 for the line size specified.

3.6.2 Temperature range. Hydraulic fuses shall be designed to operate over a temperature range from -65 °F to 160 °F (-54 °C to 71 °C).

3.7 Magnetic particle inspection. All magnetizable highly-stressed parts shall be subjected to magnetic inspection in accordance with ASTM E 1444. Where necessary, such inspection shall be called for on the manufacturer's drawings. Cracks or other injurious defects disclosed by magnetic inspection shall be cause for rejection.

3.8 Operational marking. All fuses shall be clearly marked with arrows noting direction of flow for closing.

3.9 Age controls. Age-sensitive elastomeric parts shall be in accordance with SAE AS1933 and SAE ARP 5316.

3.10 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.3).
b. Conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

4.2 Inspection conditions.

4.2.1 Fluid. The hydraulic fluid used for all qualification inspections shall conform to MIL-PRF-5606. Conformance inspections may be performed with oil conforming to MIL-PRF-5606 or MIL-PRF-6083.

4.2.1.1 Fluid filter. The test fluid shall be continuously filtered through a filter element or elements that will ensure a contamination limit of Class 5 in accordance with NAS 1638. Procedure and records of the testing results to assure conformance with this limit shall be maintained and shall be made available to appropriate government activities upon request. The filter and element used shall be satisfactory for the temperature range encountered and shall be cleaned or replaced regularly to avoid clogging.

4.2.2 Temperature. Except where otherwise specified, tests shall be conducted at a room temperature of 70 °F to 90 °F (21 °C to 32 °C) and an oil temperature of 90 °F to 110 °F (32 °C to 43 °C). The oil temperature during the tests shall be recorded.

4.3 Qualification inspection.

4.3.1 Test samples. Unless otherwise specified by the qualifying activity, qualification tests shall be conducted on two samples of hydraulic fuses.

4.3.1.1 Minimum clearance sample. One of the hydraulic fuses to be tested shall be assembled of parts that have been selected to provide that the clearance with regard to linear and diametral tolerances between moving and non-moving members, conducive to malfunctioning at extreme temperatures, will not exceed 110 percent of the minimum designed clearance permitted by the manufacturer's drawings. For cases of sliding where packing friction would influence the performance of the component, such as pistons operated by springs, the maximum packing friction anticipated shall be induced in the test specimen. In these cases, o-ring packing glands shall be designed to provide maximum o-ring squeeze, including the effect of adverse o-ring cross section tolerances and high swell fluids. This specimen shall be marked "MIN".

4.3.1.2 Maximum clearance sample. The second specimen shall be assembled of parts that have been selected to provide that the tolerances, with regard to linear, diametral and concentric tolerances between moving members, conducive to malfunctioning as a result of wear associated with prolonged operation, shall not be less than 90 percent of the maximum designed clearance permitted by the manufacturer's drawings. This specimen shall be marked "MAX".

4.3.1.3 Clearance sample tests. The manufacturer shall apply all tests of 4.5 to the "MAX" sample, with the exception of the extreme temperature operation tests of 4.5.7. The "MIN" sample shall be subjected to all tests specified in 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. The conformance inspection shall consist of individual tests and sampling tests.

4.4.1 Individual tests. Each hydraulic fuse submitted for acceptance under contract shall be subjected to the following tests as specified in 4.5:

a. Examination of product (see 4.5.1).
b. Proof pressure (see 4.5.2).
c. Leakage (see 4.5.3).
d. Volumetric capacity (see 4.5.4).

4.4.1.1 Inspector's tests. The fuses may be subjected to any of the other additional tests specified herein that the inspector considers necessary to determine conformance with any of the requirements of this specification.

4.4.2 Sample lot. Fuses in quantities of not greater than 100 and offered for delivery at approximately the same time shall be considered a lot. A sample shall be defined as three fuses selected at random from a lot.

4.4.3 Sampling tests. When specified (see 6.2), a sample that has passed the individual tests of 4.4.1 shall undergo additional testing, which will include one or more of the tests listed below. The lot shall be rejected if any defect is found in the sample.

a. Immersion (see 4.5.5).
b. Pressure drop (see 4.5.6).
c. Extreme temperature operation (see 4.5.7).
d. Endurance (see 4.5.8).
e. Acceleration (see 4.5.9).
f. Bleeding (see 4.5.10).
g. Resetting (see 4.5.11).
h. Burst pressure (see 4.5.12).

4.5 Test methods.

4.5.1 Examination of product. Each hydraulic fuse shall be carefully examined to determine conformance with this specification with respect to material, workmanship, marking, any visible defects, and conformance with applicable drawings.

4.5.2 Proof pressure. Hydraulic pressure shall be applied to the automatic quantity measuring hydraulic fuse by means of a hand pump. Pressure shall be maintained for a period of five minutes. The fuse shall withstand a hydrostatic test pressure of 1.50 times the rated pressure without evidence of external leakage, failure, or distortion.

4.5.3 Leakage. When the fuse is closed, pressure shall be applied to the upstream side of the fuse. The leakage measurement shall consist of the last three minutes of a five-minute period. Leakage through the fuse shall not exceed 15 cubic centimeters (cc) per hour (approximately five drops per minute), at any pressure from 40 psi to 150 psi. Leakage shall not exceed 1/2 cc per

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

hour (approximately 10 drops per hour) at any pressure over 150 psi to the rated pressure. For qualification tests the fuse shall be tested at pressures of 40 psi, 80 psi, 150 psi, 50 percent of the rated pressure, and 100 percent of the rated pressure. For acceptance tests, each fuse shall be tested at 40 psi and the rated pressure.

4.5.4 Volumetric capacity. The fuse shall be installed in accordance with figure 1.

4.5.4.1 Qualification tests. Qualification tests for volumetric capacity shall be conducted with unrestricted flow and at the rated pressure as follows:

a. Flow shall be passed through the fuse at 1/10 gallon per minute (gpm), and the volume of fluid passed through the fuse before the fuse closes shall be measured. For fuses requiring reverse flow for resetting, the flow shall be reversed. The volume of fluid passed shall be within the limits specified in figure 2.

b. The test shall be repeated for the percentages of rated flow and the volume of fluid passed shall be within the limits specified in figure 2.

c. An eight-hour test shall be conducted to verify that the fuse shall not close at flow rates less than 0.02 gpm.

4.5.4.2 Acceptance tests. All fuses shall be tested at flows of 1/4 gpm and 200 percent of the rated flow. The volume of fluid passed shall be within the limits specified in figure 2. These tests for volumetric capacity shall be conducted within unrestricted flow.

4.5.4.3 Volumetric capacity of fuses. The rated volumetric capacity of fuses shall be 10, 20, 40, 60, 80, 120, 160, 200, and 250 cubic inches as applicable. The tube size shall be 1/2 inch.

4.5.5 Immersion. Fuses containing non-metallic parts shall be subjected to immersion tests.

4.5.5.1 Water immersion. The sample shall be immersed in water at 77 °F ± 4 °F (25 °C ± 2 °C) until the maximum rate of dimensional changes does not exceed 0.0003 inch in a 10-day period as shown by a faired curve plot of measurements. This test shall cover a period of not less than 30 days. Dimensional measurements shall be made daily for the first 14 days and at least every 2 days for the remainder of the period. If the unit is made of several non-metallic parts, of which some remain stationary during operation of the unit, the immersion test shall be conducted in such a manner that the swelling action will produce the worst possible conditions towards malfunctioning of the unit.

4.5.5.2 Oil immersion. The sample shall be immersed in hydraulic fluid conforming to MIL-PRF-5606 at 158 °F ± 2 °F (70 °C ± 1 °C) for a period of 30 days. The oil immersion shall be subject to the same conditions as the water immersions (see 4.5.5.1) and measurements shall be made at similar periods of immersion.

4.5.6 Pressure drop. With the apparatus set up as shown in figure 3, the pressure flow shall be measured on both the closing and resetting directions with unrestricted flow in the circuit and with a flow restricted to obtain normal working pressure in the fuse. Pressure drop shall be determined at flow rates of 25 percent, 50 percent, 100 percent, and 200 percent of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

rated flow. The pressure drop through the fuse in either the closing or the resetting direction shall not exceed 25 psi at the rated flow for the fuse.

4.5.7 Extreme temperature operation. The automatic quantity-measuring hydraulic fuse shall operate to shut off or to establish flow when operated at any temperature from -65 °F to 160 °F (-54 °C to 71 °C). Extreme temperature tests shall be conducted on the sample fuse assembled of parts with tolerances most conducive to binding at the temperature tested and shall be performed in accordance with 4.5.7.1 through 4.5.7.3 on a test set up in accordance with figure 4.

4.5.7.1 High temperature. The fuse shall be subjected to leakage tests and tests for volumetric capacity at flow rates of 1 gpm, 25 percent of the rated flow capacity, and 100 percent of the rated flow capacity after exposure to the specified high temperature for a period of six hours. Fluid flow rate and air temperature shall not exceed that specified in paragraphs 3.6.1 and 3.6.2 and the volumetric capacity shall be within the limits specified on figure 2.

4.5.7.2 Low temperature. The tests specified above for high temperature shall be repeated except that the fuse shall be exposed to low temperature for a period of 72 hours. The fluid and air temperatures shall be maintained at the required values during the test. Leakage shall not exceed that specified in 4.5.3 and the volumetric capacity shall be within the limits specified on figure 2.

4.5.7.3 Rapid warm-up. The low temperature test set up shall be allowed to warm up rapidly to room temperature and at least five cycles of operation shall be made during the warm-up period at approximately equal increments of time. The volumetric capacity shall be within the limits specified on figure 2. The tubing between the transfer cylinder and the fuse (see figure 4) shall be 1/2 inch size and 12 feet in length to aid fluid temperature stabilization and to forestall inadvertent closing of the fuse. This length of tubing shall be specified on the manufacturer's drawings.

4.5.8 Endurance. The fuse shall be installed in accordance with figure 5 and subjected to 20,000 cycles of operation, each cycle to consist of passage of at least 90 percent of the rated volumetric capacity in the closing direction with the fluid at rated pressure (and reversal of flow to fully reset the test fuses, where applicable). The means of limiting fluid volume shall then be removed and 100 additional cycles of full closing and resetting shall be accomplished, the closing pressure to be the rated pressure.

4.5.9 Acceleration. The apparatus shall be set up in accordance with figure 6.

4.5.9.1 Volumetric capacity. With the fuse bled, in the open position, and installed in a direction so that acceleration will tend to close it, an acceleration of 12 g shall be developed by the mechanism. Rated flow shall be applied through the fuse after a minimum time of two seconds at the acceleration. The volumetric capacity shall not vary from those specified in 4.5.4.3.

4.5.9.2 Leakage. With the fuse mounted in a direction so that acceleration will tend to open it, 40 psi pressure shall be applied on the fuse in a closed position. An acceleration of 12 g shall be developed and held for a minimum of two seconds and then stopped. The fuse shall not

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

show any leakage in excess of that specified in 4.5.3, as observed by movement of the actuating cylinder piston.

4.5.10 Bleeding. The fuse shall be installed in accordance with figure 1 with the fuse completely void of fluid and without bleeding. Rated flow shall be directed through the fuse in the direction for closing. The quantity of fluid passed through the fuse before closing shall be measured. The fuse shall pass its volumetric capacity without preliminary bleeding.

4.5.11 Resetting. The apparatus shall be set up in accordance with figure 7.

4.5.11.1 Type I (AN6281). For fuses that do not require reverse flow for resetting, the relief valve shall be set at the rated pressure and flow shall be passed through the fuse until it closes. Rated pressure shall then be applied to the downstream side of the fuse while maintaining pressure on the upstream side for a maximum of five seconds, following which rated flow shall be passed through the fuse. The fuse shall fully reset itself within a five-second period without the aid of reverse flow. The quantity of fluid passed through the fuse before it closes shall be measured and shall be within the limits specified on figure 2.

4.5.11.2 Type II (AN6282). For fuses that require reverse flow in order to reset, the relief valve shall be set at the rated pressure and flow shall be passed through the fuse until it fully closes. The fuse shall fully reset itself after passage of a maximum of eight cubic inches or 20 percent of the rated volumetric capacity, whichever is greater, in the reverse flow direction at the rated flow capacity. The rated flow shall then be applied through the fuse in the direction for closing. The quantity of fluid passed before the fuse closes shall be measured and shall be within the limits specified on figure 2.

4.5.12 Burst pressure. The hydraulic fuse shall withstand, without rupture, a hydrostatic pressure equal to 2.5 times the rated pressure. The pressure shall be gradually increased until the specified burst pressure is reached. The pressure rise shall be 25,000 psi (+0 psi, - 10,000 psi) per minute.

4.6 Internal treatment. Following the inspection, sampling, and test procedures specified above, each fuse shall be internally flushed with hydraulic preservative oil conforming to MIL-PRF-6083 and contamination limits shall be as specified in MIL-PRF-6083. All parts shall be capped and plugged with closures conforming to NAS 847 to prevent oil leakage.

4.7 Maintenance of qualification. At specified intervals determined by the qualifying activity, the manufacturer must be able to demonstrate that the company still has the capabilities and facilities necessary to produce the QPL items in accordance with this specification and the provisions governing qualification specified in SD-6.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

inventory control point's packaging activities within the military service or defense agency, or within the military service's system command. Packaging data retrieval is available from the managing military department's or defense agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification is intended for use in aircraft hydraulic lines to prevent loss of hydraulic fluid from the system when the lines are ruptured or fail for any reason. Fuses meeting the requirements of this specification are for use in hydraulic systems containing only hydraulic oil conforming to MIL-PRF-5606 and are not qualified for use with other types of fluids.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type (see 1.3).
c. Size (see 1.4).
d. Sample inspection, if different (see 4.4.3).
e. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products that are, at the time of award of contract, qualified for inclusion in QPL-5508 whether or not such are products have actually been listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Richmond, Attn: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or STDZNMGT@dla.mil.

6.4 Subject term (key word) listing.

reverse flow
reset

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

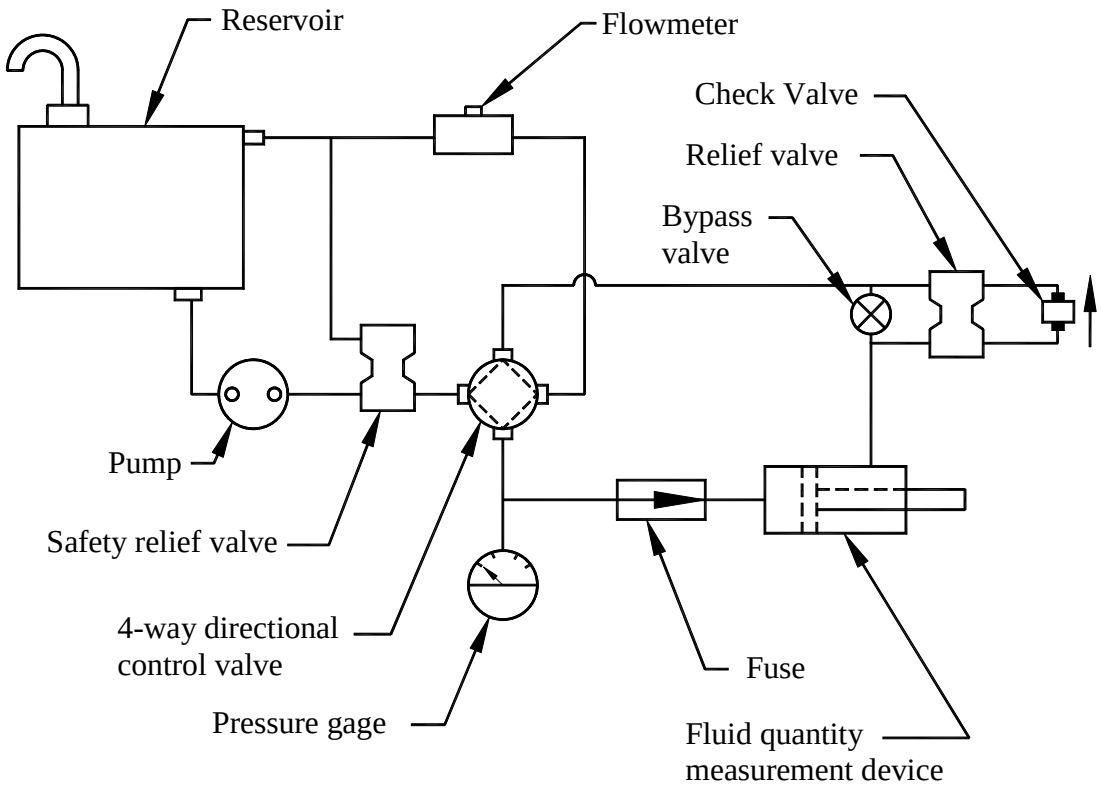


FIGURE 1. Typical installation for bleeding and volumetric capacity tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

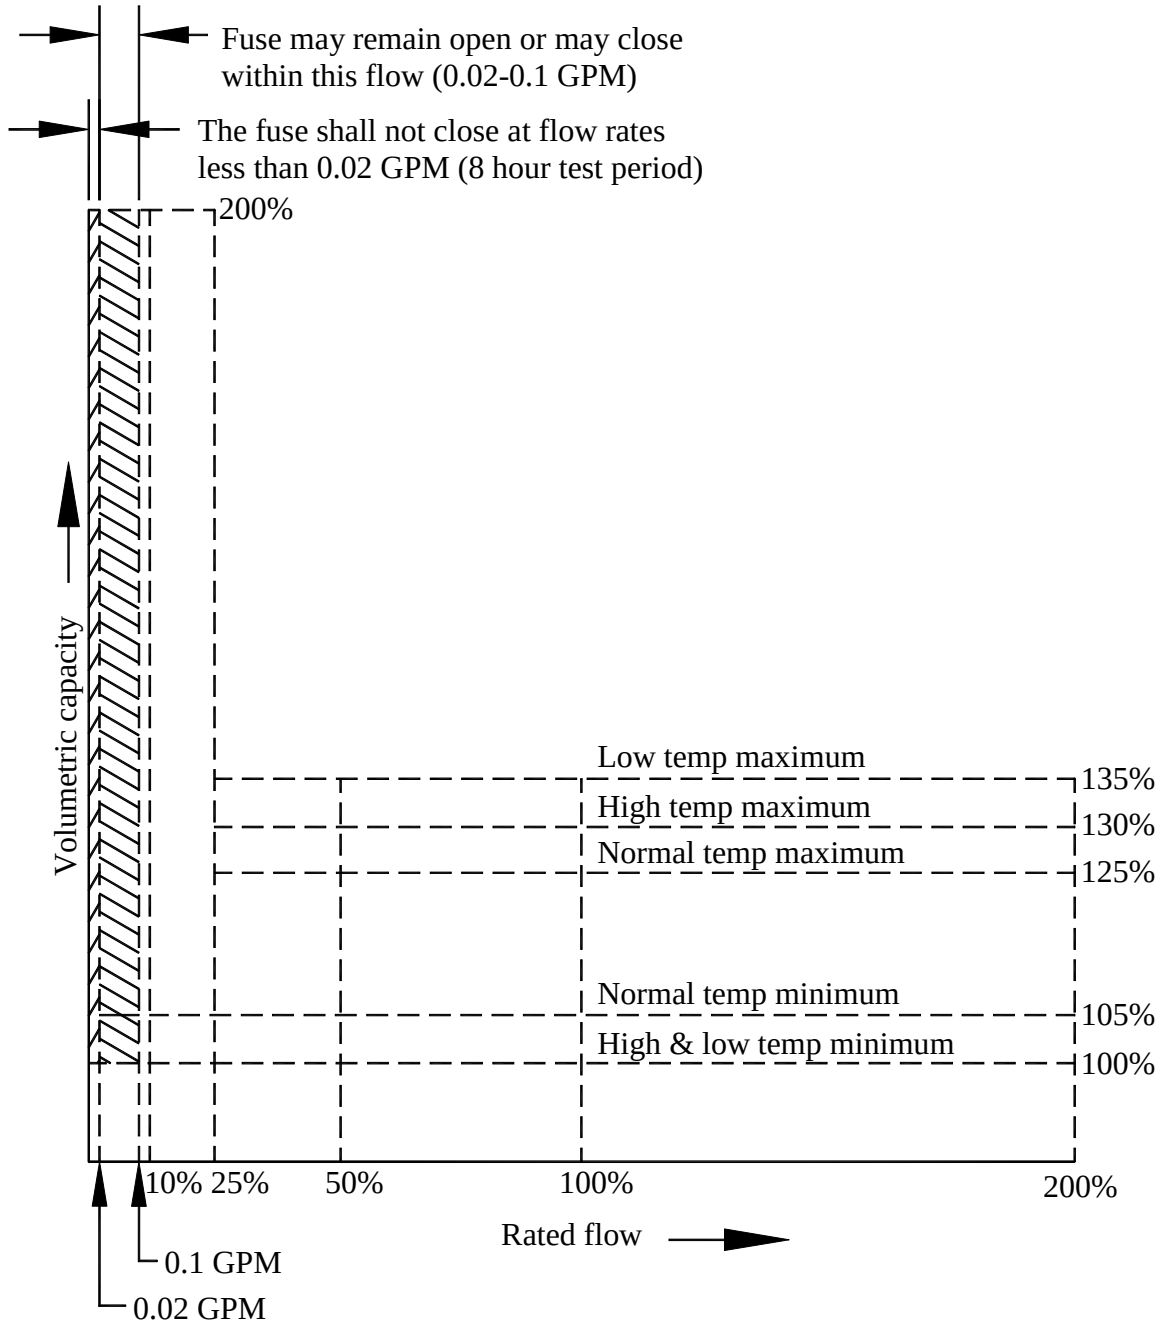


FIGURE 2. Volumetric capacity limitations

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

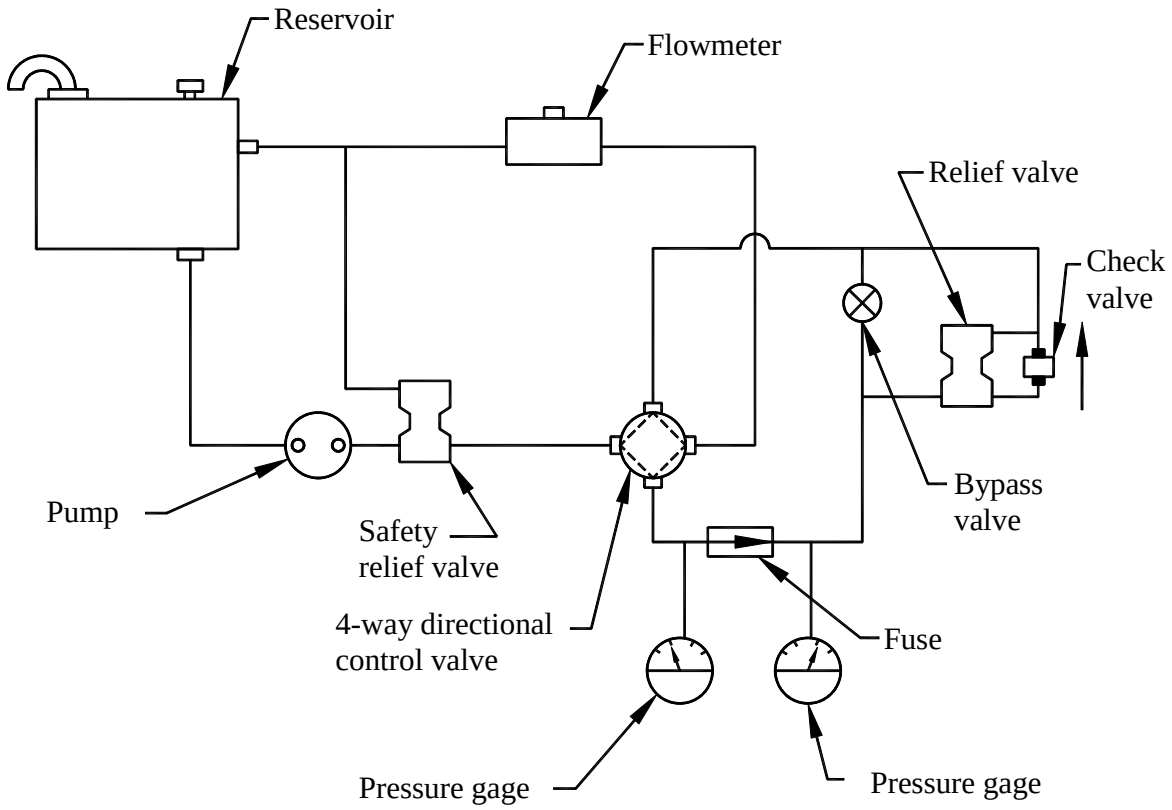


FIGURE 3. Typical installation for flow tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

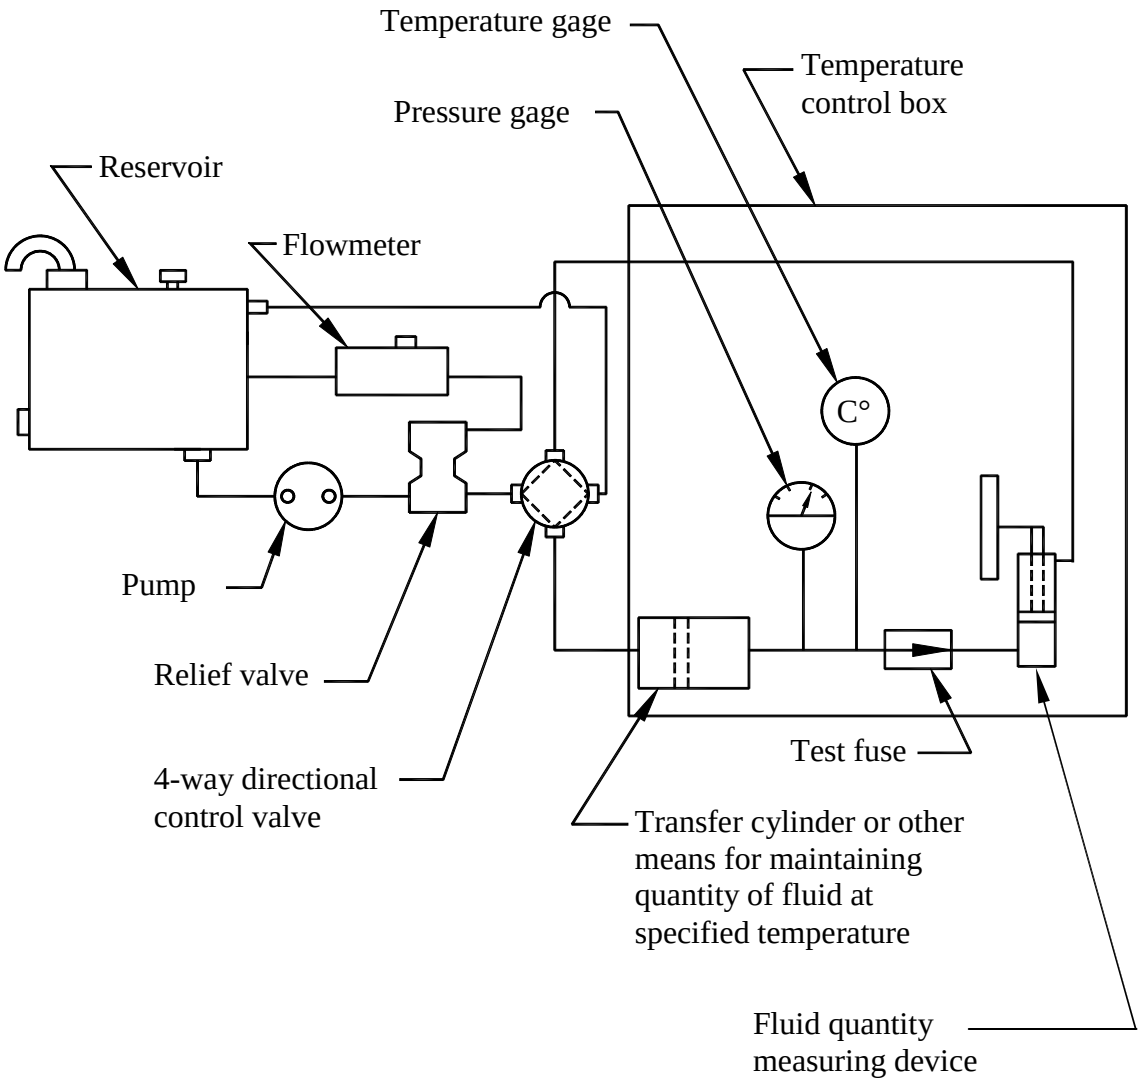


FIGURE 4. Typical installation for extreme temperature tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

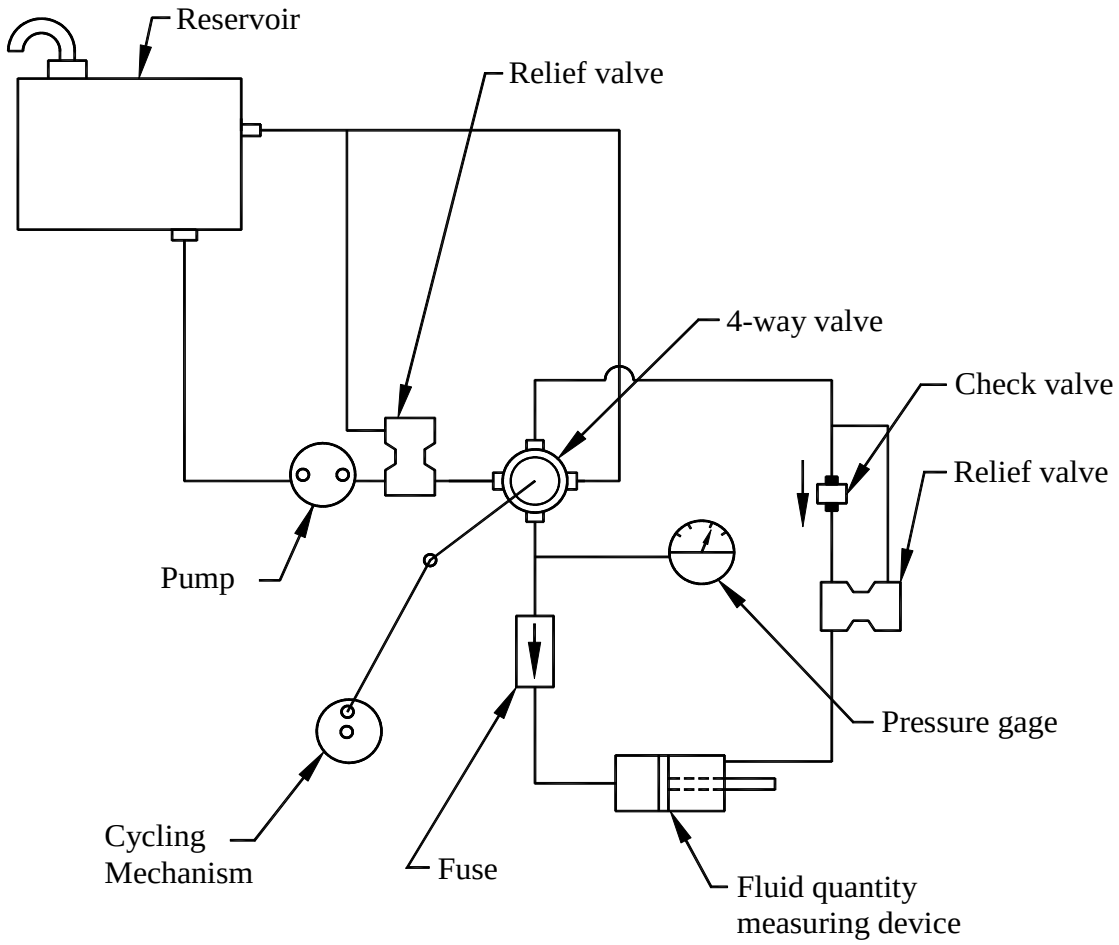


FIGURE 5. Typical installation for endurance test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

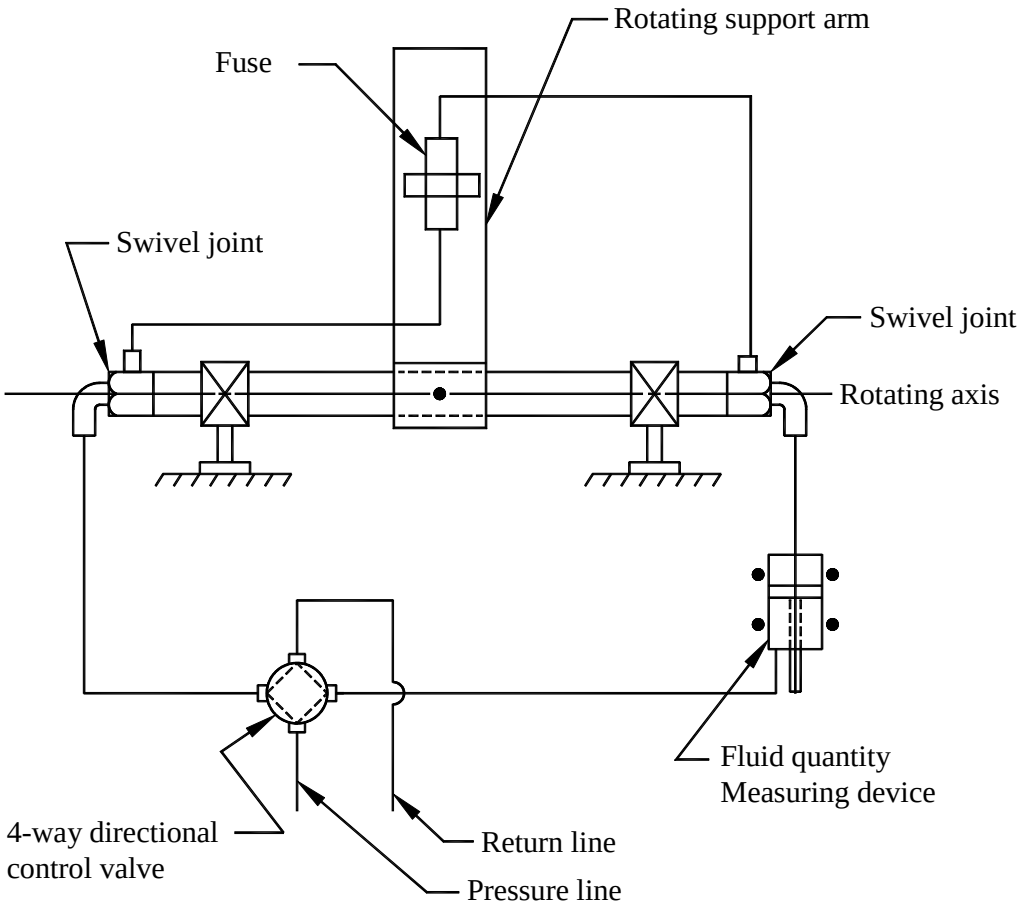


FIGURE 6. Typical installation for acceleration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

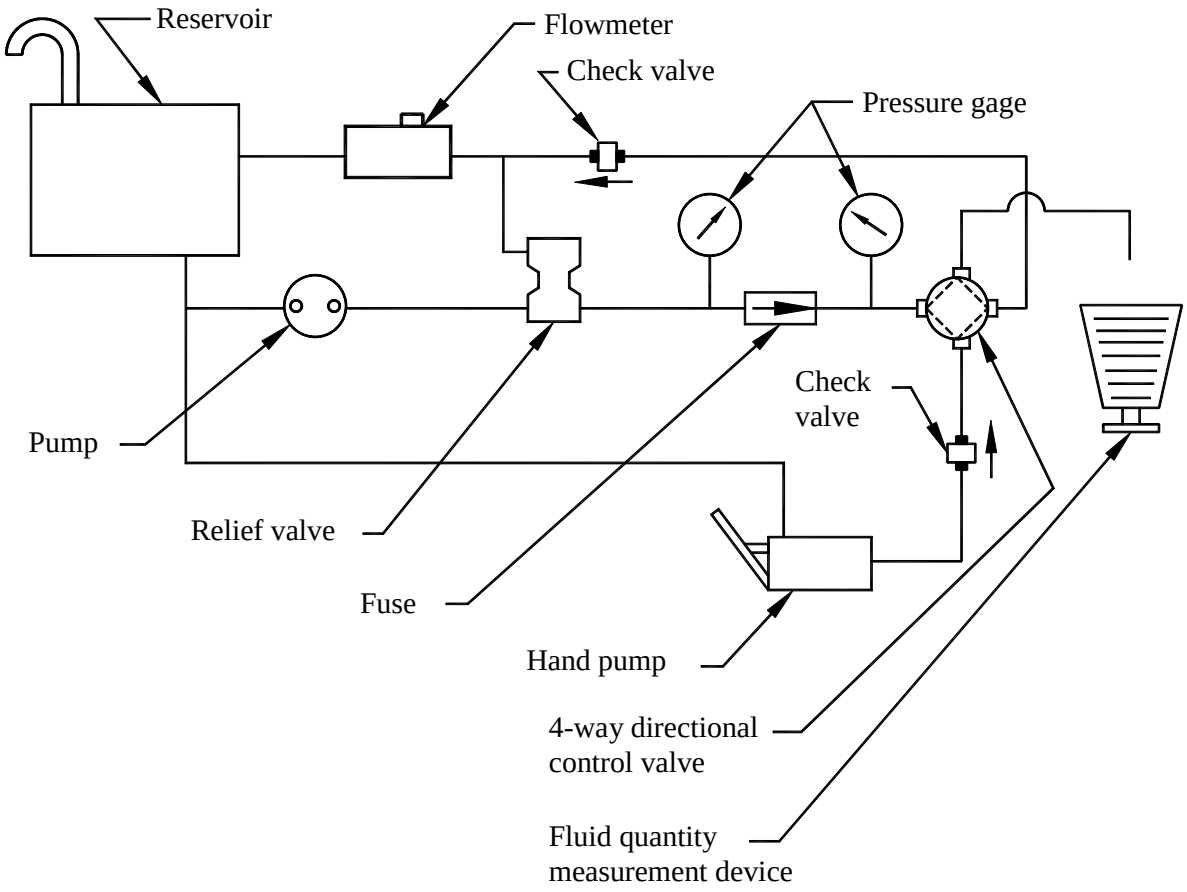


FIGURE 7. Typical installation for reset test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing Activity:
DLA - GS1

(Project 1650-0653-000)

Review Activity:
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:59Z
Check the source to verify that this is the current version before use.