THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5501

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No. 0704-0188

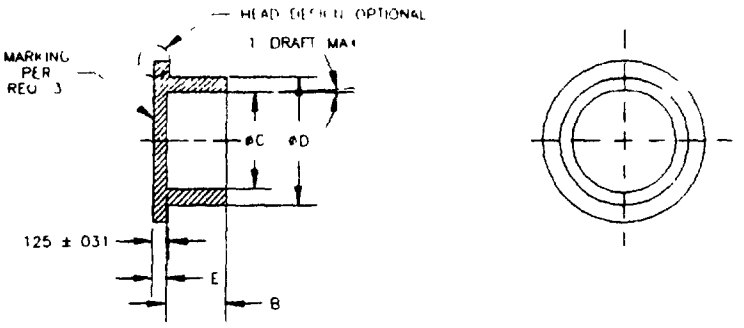


TABLE 1. CIRCULAR CAPS DIMENSION

DASH No	øA ± 031	B ± 031	øC ± 010	øD ± 010	E ± 010
250	670	500	250	336	040
313	670	500	313	399	040
375	670	500	375	461	040
413	670	625	413	483	040
480	740	500	480	540	040
500	750	500	500	586	040
530	750	625	530	595	040
605	840	500	605	665	040
655	860	625	655	715	040
720	970	500	720	775	040
785	1 031	625	785	845	045
850	1 125	500	850	905	045
893	1 125	625	893	963	045
973	1 220	500	973	1 035	045
1028	1 250	625	1 028	1 088	045
1093	1 330	562	1 093	1 155	045
1125	1 400	562	1 125	1 213	045
1150	1 406	625	1 150	1 215	050
1231	1 465	562	1 231	1 301	050
1270	1 500	625	1 270	1 340	050
1340	1 590	562	1 340	1 410	050
1390	1 640	625	1 390	1 460	050
1463	1 700	562	1 463	1 533	050
1540	1 810	625	1 540	1 580	050
1645	1 875	625	1 645	1 718	055
1715	1 950	562	1 715	1 790	055

PREPARING ACTIVITY AIRFORCE-30
CUSTODIANS ARMY- NAVY- SH
AIR FORCE- 30
REVIEW 13 82 99 IS
USER 11, 17 70 71 80
PROJECT NUMBER 5340-2178

MILITARY SPECIFICATION SHEET

TITLE
CAP CIRCULAR STATIC, SHIELDING, ELECTRICAL CONNECTOR

SPECIFICATION SHEET NUMBER
MIL-C-5501/31 29 JULY 1994
SUPERSEDING
AMSC- N/A FSC 5340

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5501

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

TABLE 1 CIRCULAR CAPS DIMENSION (Cont d)

DASH No	⌀A ± 031	B ± 031	⌀C ± 010	⌀D ± 010	E ± 010
1890	2 125	625	1 890	1 970	055
1965	2 220	562	1 965	2 040	055
2140	2 340	625	2 140	2 210	055
2215	2 435	600	2 215	2 290	055
2380	2 600	625	2 380	2 450	060
2440	2 660	600	2 440	2 530	060
2630	2 875	625	2 630	2 700	060
2720	2 960	600	2 720	2 812	060
2880	3 125	625	2 880	2 950	060
2960	3 225	600	2 960	3 050	060

REQUIREMENTS

1 MATERIAL - THE CAP SHALL BE MADE OF AN INTRINSICALLY CONDUCTIVE NONE SLOUGHING COMPOUND AND SHALL HAVE A VOLUME RESISTANCE OF LESS THAN 1 000 000 OHMS MEASURED AS SPECIFIED IN NOTE 2

2 RESISTANCE TO SLOUGHING/CRAYONING - WHEN RUBBED BRISKLY AGAINST A HARD FLAT LAMINATED SURFACE THE CAPS SHALL EXHIBIT NO TENDANCY TO SLOUGH OR MARK THE SURFACE IN A MANNER SIMILAR TO A CRAYON

3 MARKING - MANUFACTURER NAME ELECTROSTATIC DISCHARGE SENSITIVE SYMBOL (HAND IN TRIANGLE) PER MIL-STD-129 AND PART NUMBER SHALL BE MARKED ON THE OUTER FACE OF THE CAPS CAPS HAVING AN INNER DIAMETER (DIMENSION "⌀C") OF LESS THAN 500 INCHES DO NOT REQUIRE THE SYMBOL

4 PART NUMBER - THE PART NUMBER CONSIST OF M5501/31 AND A DASH No TAKEN FROM TABLE I
EXAMPLE M5501/31 - 250

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 VOLUME RESISTANCE SHALL BE MEASURED AS FOLLOWS

a THE TEST APPARTUS SHALL CONSIST OF AN ELECTRODE A CALIBRATED OHMMETER AND A NON-OXIDIZING METAL SHEET HAVING ENOUGH SURFACE AREA TO ACCOMODATE THE ENTIRE TESTED CAP CIRCUMFERENCE THE ELECTRODE SHALL BE CONSTRUCTED IN ACCORDANCE WITH ASTM F150 WITH THE FOLLOWING DIMENSIONAL EXCEPTONS THE ELECTRODE AND RUBBER INSERT DIAMETER SHALL BE 1 5 ±0 05 INCHES AND THE TOTAL WEIGHT SHALL BE 2 0 LB ±0 1 OZ THE OHMMETER SHALL BE CAPABLE OF SUPPLYING AN OPEN CIRCUIT TEST VOLTAGE OF BETWEEN 5 AND 15 VOLTS AND SHALL BE CAPABLE OF MEASURING RESISTANCES OF BETWEEN 0 AND 1 000 000 OHMS THE NON-OXIDIZING METAL SHALL BE FLAT FREE OF ANY INSULATIVE COATINGS AND AT LEAST 1/16 INCH THICK

b ALL TEST SAMPLES SHALL BE PRECONDITIONED AT 10 ±2% RH AND 70 ±2°F FOR 24 HOURS PRIOR TO TESTING IN THE SAME ENVIRONMENT

c RESISTANCE MEASUREMENTS SHALL BE MADE BY LAYING THE TEST CAP ON THE METAL SHEET (OPEN SIDE UP) AND PLACING THE ELECTRODE INSIDE THE CAP WITH THE ALUMINUM FOIL SIDE CONTACTING THE CAP EACH MEASUREMENT IS MADE BY CONNECTING THE LEADS OF THE OHMMETER TO THE TOP OF THE ELECTRODE AND THE METAL PLATE AND APPLYING THE TEST VOLTAGE THE RESISTANCE OF THE CAP SHALL BE AS SPECIFIED

3 SAMPLING/TESTING - ONE CAP SHALL BE SELECTED AT RANDOM PER 1000 OF EACH SIZE PURCHASED WHEN LESS THAN 1000 CAPS ARE PURCHASED ONE SAMPLE SHALL BE SELECTED AT RANDOM FOR TESTING FOR PURCHASED CAPS HAVING A DIAMETER (DIMENSION "⌀C") SMALLER THAN THE TEST ELECTRODE A CAP FROM THE SAME LOT HAVING A DIAMETER GREATER THAN 1 5 INCHES SHALL BE USED

4 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCE CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

5 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

PREPARING ACTIVITY AIRFORCE-30 CUSTODIANS ARMY- NAVY- SH AIR FORCE- 30 REVIEW 13, 82, 99 IS USER 11, 17 89 70, 71, 80 PROJECT NUMBER 5340-2178	MILITARY SPECIFICATION SHEET TITLE CAP, CIRCULAR, STATIC SHIELDING ELECTRICAL CONNECTOR	SPECIFICATION SHEET NUMBER MIL-C-5501/31 SUPERSEDING AMSC- N/A FSC 5340
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 2 of 2

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:58Z
Check the source to verify that this is the current version before use.