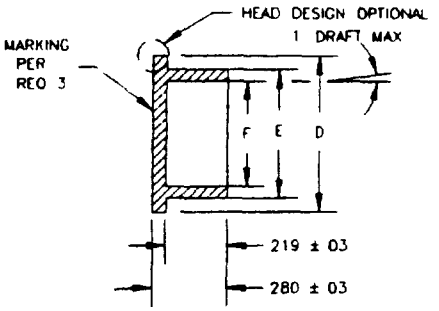
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5501

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188



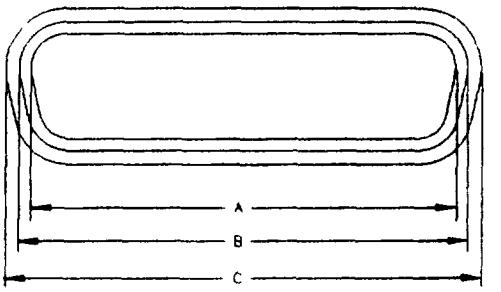


TABLE 1. "D" TYPE CAPS DIMENSION

DASH No	A ± 010	B ± 010	C ± 031	D ± 031	E ± 010	F ± 010
9S	627	694	794	462	362	295
9P	708	775	849	512	434	367
15S	955	1 022	1 122	462	362	295
15P	1 040	1 107	1 177	512	436	369
25S	1 495	1 562	1 662	462	362	295
25P	1 568	1 635	1 735	530	430	363
37S	2 143	2 210	2 310	462	362	295
37P	2 216	2 283	2 383	530	430	363
50S	2 049	2 116	2 216	574	474	407
50P	2 112	2 179	2 279	636	536	469

REQUIREMENTS:

1 MATERIAL - THE CAP SHALL BE MADE OF AN INTRINSICALLY CONDUCTIVE NONE SLOUGHING COMPOUND AND SHALL HAVE A VOLUME RESISTANCE OF LESS THAN 1 000 000 OHMS MEASURED AS SPECIFIED IN NOTE 2

2 RESISTANCE TO SLOUGHING/CRAYONING - WHEN RUBBED BRISKLY AGAINST A HARD FLAT LAMINATED SURFACE THE CAPS SHALL EXHIBIT NO TENDENCY TO SLOUGH OR MARK THE SURFACE IN A MANNER SIMILAR TO A CRAYON

3 MARKING - MANUFACTURER NAME ELECTROSTATIC DISCHARGE SENSITIVE SYMBOL (HAND IN TRIANGLE) PER MIL-STD-129 AND PART NUMBER SHALL BE MARKED ON THE OUTER FACE OF THE CAPS

4 PART NUMBER - THE PART NUMBER CONSIST OF M5501/32 AND A DASH No TAKEN FROM TABLE I
EXAMPLE M5501/32 - 15S

PREPARING ACTIVITY AIRFORCE-30 CUSTODIANS ARMY NAVY - SH AIR FORCE - 30 REVIEW 13, 82 99, 15 USER 11 17 70, 71, 80 PROJECT NUMBER 5340-2177	MILITARY SPECIFICATION SHEET TITLE CAP "D" TYPE STATIC SHIELDING ELECTRICAL CONNECTOR	SPECIFICATION SHEET NUMBER MIL-C-5501/32 29 JULY 1994 SUPERSEDING AMSC - N/A FSC 5340
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 1 of 2

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE PROPOSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5501

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

NOTES:

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 VOLUME RESISTANCE SHALL BE MEASURED AS FOLLOWS

a THE TEST APPARTUS SHALL CONSIST OF AN ELECTRODE A CALIBRATED OHMMETER AND A NON-OXIDIZING METAL SHEET THE ELECTRODE SHALL BE CONSTRUCTED IN ACCORDANCE WITH ASTM F 150 WITH THE FOLOWING DIMENSIONAL EXCEPTIONS THE ELECTRODE AND RUBBER INSERT DIAMETER SHALL BE 1 5 ±0 05 INCHES AND THE TOTAL WEIGHT SHALL BE 2 0 LB ±0 1 OZ THE OHMMETER SHALL BE CAPABLE OF SUPPLYING AN OPEN CIRCUIT TEST VOLTAGE OF BETWEEN 5 AND 15 VOLTS AND SHALL BE CAPABLE OF MEASURING RESISTANCES OF BETWEEN 0 AND 1 000 000 OHMS THE NON-OXIDIZING METAL SHEET SHALL BE FLAT FREE OF ANY INSULATIVE COATINGS AND AT LEAST 1/16 INCH THICK

b - ALL TEST SAMPLES SHALL BE PRECONDITIONED AT 10 ±2% RH AND 70 ±2°F FOR 24 HOURS PRIOR TO TESTING IN THE SAME ENVIRONMENT

c RESISTANCE MEASUREMENTS SHALL BE MADE BY LAYING THE TEST CAP ON THE METAL SHEET (OPEN SIDE UP) FILLING THE CAP LEVEL WITH A CONDUCTIVE MATERIAL SUCH AS FOAM OR METAL BIRD-SHOT (#6 OR FINER) AND PLACING THE ELECTRODE ON TOP ENSURE THE ELECTRODE CONTACTS BOTH THE FILLER MATERIAL AND THE EDGE OF THE CAP EACH MEASUREMENT IS MADE BY CONNECTING THE LEADS OF THE OHMMETER TO THE TOP OF THE ELECTRODE AND THE METAL PLATE AND APPLYING THE TEST VOLTAGE THE RESISTANCE OF THE CAP SHALL BE AS SPECIFIED

3 SAMPLING/TESTING - ONE CAP SHALL BE SELECTED AT RANDOM PER 1000 OF EACH SIZE PURCHASED WHEN LESS THAN 1000 CAPS ARE PURCHASED ONE SAMPLE SHALL BE SELECTED AT RANDOM FOR TESTING FOR PURCHASED CAPS HAVING A DIMENSION "A" OF LESS THAN 1 5 INCHES CAP FROM THE SAME LIST HAVING A DIMENSION GREATER THAN 1 5 INCHES SHALL BE USED

4 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCE CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

5 REFERENCED GOVERNMENT (OR NON-GOVERMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

PREPARING ACTIVITY AIRFORCE-30 CUSTODIANS ARMY- AR NAVY- SH AIR FORCE- 30 REVIEW 13 82, 99 IS USER 11 17, 70 71 80 PROJECT NUMBER 5340-2177	MILITARY SPECIFICATION SHEET TITLE CAP "D" TYPE STATIC SHIELDING ELECTRICAL CONNECTOR	SPECIFICATION SHEET NUMBER MIL-C-5501/32 SUPERSEDING AMSC- N/A FSC 5340
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page 2 of 2

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE PROPOSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:58Z
Check the source to verify that this is the current version before use.