MILITARY SPECIFICATION

VALVES, REGULATING FLUID PRESSURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

*1.1 This specification covers valves, regulating fluid pressure for use in Type I aircraft hydraulic systems.

*1.2 Classification. Valves, regulating fluid pressure shall be of the rated flow capacities and operating pressure ranges listed in Table I, as specified (see 6.2).

TABLE I. Rated Flow Capacities and Operating Pressure Ranges

AN Part No.	Rated Flow Capacity	Operating Pressure Range Cut In	Cut Out
AN6206-1	10 gpm	800+50-0	1,000+50-0
AN6206-2	10 gpm	1,250+50-0	1,500+50-0
AN6206-1-2	10 gpm	Adjustable to either the -1 or -2 pressure range	
AN6295-1	10 gpm	1,250+50-0	1,500+50-0
AN6295-2	10 gpm	2,600+100-0	3,000+100-0
AN6295-1-2	10 gpm	Adjustable to either the -1 or -2 pressure range	

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-566 Boxes, Folding, Paperboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation-Packaging, Methods Of
MIL-C-5501	Caps and Plugs, Protective, Dust and Moisture Seal
MIL-P-5514	Packings, Installation and Gland Design, Hydraulic General Specification For
MIL-P-5516	Packings and Gaskets, Preformed, Petroleum Hydraulic Fluid Resistant
MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance
MIL-H-6083	Hydraulic Fluid, Petroleum Base, Preservative and Operation
MIL-H-8775	Hydraulic System Component Aircraft and Missiles General Specification For

STANDARDS

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-794	Parts and Equipment Procedures for Packaging and Packing Of
MS28700	Accumulator - Cylindrical 3000 PSI

AIR FORCE-NAVY AERONAUTICAL

AN6206	Regulator-10 gpm Hydraulic Pressure
AN6276	Accumulator-Hydraulic Pressure, Spherical, 3000 PSI
AN6295	Regulator-10 gpm Hydraulic Pressure

PUBLICATIONS

AIR FORCE-NAVY AERONAUTICAL SPECIFICATION BULLETIN NO. 438-Age Controls for Synthetic Rubber Parts

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. The requirements of Specification MIL-H-8775 apply as requirements of this specification. When the two specifications conflict, this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

3.2 Qualification. The regulating fluid pressure valve furnished under this specification shall be a product which has been tested, and passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.3 Design and construction.

3.3.1 Dimensions. The dimensions of regulating fluid pressure valves shall conform to Standard AN6206 or AN6295.

3.3.2 Rated flow capacity. The rated flow capacity of regulating fluid pressure valves shall conform to the requirements specified in Table I.

3.3.3 Adjustment. The AN6295-1-2 or AN6206-1-2 regulating fluid pressure valves shall be adjustable to permit selection of either the upper or lower pressure range specified in Table I. It shall be possible to accomplish the adjustment with standard tools. Adequate means to lock the adjustment in the intended setting shall be provided.

3.3.4 Damping. Design and construction shall be such that the regulating fluid pressure valves will not be affected by back pressure or pressure surges which might tend to cause them to operate or bypass fluid in other than the intended manner or to become inoperative. Opening and closing of the regulating fluid pressure valve shall be damped to the extent that harmful shock loads are eliminated.

3.3.5 Drain ports. An external drain port shall be used to relieve internal leakage and to prevent return line back pressure from affecting valve action.

3.3.6 Age controls. Age-sensitive elastomeric parts shall be in accordance with ANA Bulletin No. 438.

3.4 Nameplate. In addition to the nameplate requirements listed in Specification MIL-H-8775, AN6206-1-2 and AN6295-1-2 valves shall be identified as adjustable between the ranges listed in Table I.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

*4.2 Classification of tests. The inspection and testing of regulating fluid pressure valves shall be classified as follows:

(a) Qualification tests
(b) Acceptance tests

4.3 Test conditions.

4.3.1 Test fluid. The hydraulic fluid used for all qualification tests shall conform to Specification MIL-H-5606. Acceptance tests may be performed with oil conforming to Specification MIL-H-5606 or MIL-H-6083.

4.3.1.1 The test fluid shall be continuously filtered through a filter element which is equivalent to a 25-micron absolute standard filter element. The filter and element used shall be satisfactory for the temperature range encountered, and cleaned or changed regularly to avoid clogging.

4.3.2 Temperature. Except where otherwise specified, tests shall be conducted at a room temperature of approximately 21°C to 32°C (70°F to 90°F) and an oil temperature of approximately 21°C to 42°C (70°F to 110°F). The oil temperature during tests shall be recorded.

4.3.3 Test pressure. Hydraulic pressure shall be applied by means of a hand pump, a power-driven pump, or an accumulator system with a means for controlling the rate of flow and pressure as required. Care shall be taken that all air is bled from the system. Pressure shall be measured by means of properly calibrated gages.

4.4 Qualification tests.

4.4.1 Test samples. Qualification tests shall be conducted on two samples of regulating fluid pressure valves unless otherwise specified.

4.4.1.1 Minimum clearance sample. One of the valves to be tested shall be assembled of parts which have been selected to provide that the clearance, with regard to linear and diametral tolerances between moving members and non-moving members, conducive to malfunctioning at extreme temperatures, will not exceed 110 percent of the minimum designed clearance permitted by the manufacturer's drawings. For cases of sliding where packing friction would influence the performance of the valve, such as

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

pistons operated by springs, etc., the maximum packing friction anticipated shall be induced in the test specimen. In these cases, O-ring packing glands shall be designed to provide maximum O-ring squeeze, including the effect of adverse O-ring cross-section tolerances and high-swell fluids. This specimen shall be marked "MIN".

4.4.1.2 Maximum clearance sample. The second specimen shall be assembled of parts which have been selected to provide that the clearance, with regard to linear and diametral tolerances between moving members, conducive to malfunctioning as a result of wear associated with prolonged operation, will not be less than 90 percent of the maximum designed clearance permitted by the manufacturer's drawings. This specimen shall be marked "MAX".

4.4.1.3 The manufacturer shall apply all tests of this specification to the MAX sample, with the exception of the high- and low-temperature functioning tests. The manufacturer shall subject the MIN sample to the temperature functioning tests and the acceptance tests set forth in this specification. Upon satisfactory completion of these tests, the manufacturer shall forward one copy of a report of these tests and one set of prints of detail and assembly drawings of the item to the preparing activity, together with a letter stating vendor's desire to obtain Air Force-Navy qualification tests. Upon acceptance of the report and drawings by the preparing activity, notice of authorization of qualification tests and shipping instructions for the MIN and MAX sample will be forwarded to the manufacturer. An additional copy of the test report and drawings shall accompany the sample units.

4.4.2 The qualification tests shall consist of all the tests of this specification as described in 4.6.

4.5 Acceptance tests. The acceptance tests shall consist of individual tests and sampling tests.

4.5.1 Individual tests. Each regulating fluid pressure valve submitted for acceptance under contract shall be subjected to the following tests, as described in 4.6:

(a) Examination of product
(b) Proof pressure
(c) Leakage
(d) Operating pressure range

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

*4.5.1.1 In addition, the regulating fluid pressure valves may be subjected to any other tests specified herein which the inspector considers necessary to determine conformance with any of the requirements of this specification.

4.5.2 Sampling tests. Unless otherwise specified, three valves, selected at random from each lot, shall be subjected to one or more of the following tests, as deemed necessary by the Government inspector:

(a) Immersion (plastic parts only)
(b) Pressure drop
(c) Operating pressure range (part b)
(d) Extreme temperature operation
(e) Rapid warmup
(f) Endurance
(g) Burst pressure

4.5.2.1 Unless otherwise specified, samples from the first lot, and every 10th lot thereafter, shall be subjected to all of the above tests. The lot shall be rejected if any defect is found in the sample. Valves in quantities of not greater than 100 and offered for delivery at approximately the same time shall be considered a lot. A sample is defined as three valves selected at random from a lot.

4.5.2.2 Rejection criteria. If any defect is found in a sample the contractor shall:

(a) Determine the cause of the defect.
(b) Take the necessary action to correct or eliminate the defect from all units on hand.
(c) Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.
(d) Select six additional samples from the same lot and subject them to the acceptance tests of 4.5. The lot will be accepted if no defects are found. If any defect is found in the sample, the lot represented by the sample shall be rejected.

4.6 Test methods.

4.6.1 Examination of product. Each regulating fluid pressure valve shall be carefully examined to determine conformance to the requirements of this specification for design, workmanship, marking, conformance to the applicable AN and manufacturer's drawings, and for any visible defects.

4.6.2 Immersion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

*4.6.2.1 Water immersion-plastic parts. Three minimum clearance samples or one minimum clearance sample from each of the three compoundings of plastic material shall then be immersed in water at 25° ± 2°C (77° ± 4°F), until the maximum rate of dimensional changes does not exceed 0.0003 inch in a 10-day period, as shown by a faired curve plot of measurements. This test shall cover a period of not less than 30 days. Dimensional measurements shall be made daily for the first 14 days, and at least every 2 days for the remainder of the period. If the unit is made of several plastic parts, of which some remain stationary during operation of the unit, the immersion test should be conducted in such manner that the swelling action will produce the worst possible conditions towards malfunctioning of the unit. For example, if the unit employs a plastic poppet sliding within a stationary plastic guide which is retained by a metal housing, the swelling action of the guide may be restricted by the metal housing. In such a case, the guide should be assembled in the mating bore during immersion to determine if the swelling action will reduce the clearance between the guide and the poppet, and if excessive strains are set up in the guide. The measurements made shall prove that there will be no interference between mating parts which would impair operation. If the manufacturer has obtained a waiver of the qualification tests of this specification, the minimum clearance sample shall be fabricated to the minimum clearance dimension, plus the allowance for maximum swell after immersion.

*4.6.2.1.1 Oil immersion-plastic parts. Three minimum clearance samples, or one minimum clearance sample each of the three compoundings of the plastic material, shall be immersed in hydraulic fluid conforming to Specification MIL-O-5606 at 70° ± 1° C (158° ± 2°F) for a period of 30 days. This oil immersion shall be subject to the same conditions as specified in 4.6.2.1 for water immersion, and measurements shall be made at similar periods of immersion.

*4.6.2.2 Other non-metallic parts. Regulating fluid pressure valves containing non-metallic parts other than plastic MS or AN standard seals in glands conforming to Specification MIL-P-5514 shall be immersed in hydraulic fluid for a period of seven days at a temperature of 70° + 1°C (158 + 2°F) prior to conducing the qualification tests specified herein. All internal parts shall be in contact with the fluid during this period. If this test is necessary as a result of the use of non-standard packing installations, or if the packings pass over holes, ports, step diameters, threads, etc., and if the inside diameter, outside diameter, or sides of the seal are unrestrained during any part of their normal operation, the packings used in the test samples shall be fabricated of AN packing compound in accordance with Specification MIL-P-5516, and the hydraulic fluid at normal

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

room temperature until ready for test. The valve shall not be exposed to the air for any appreciable length of time during the test.

4.6.3 Proof pressure. Hydraulic pressure of 1.5 times the applicable cut-out pressure shall be applied to the pump pressure inlet port, with all other ports plugged except the external drain port. Pressure shall be maintained for a minimum period of three minutes. There shall be no evidence of leakage, failure, distortion, or permanent set. Leakage through the external drain port shall not be cause for rejection. On the AN6206-1-2 and AN6295-1-2 valves, the applicable cut-out pressure shall be considered 1500 psi and 3000 psi, respectively.

4.6.4 Leakage. This test shall be conducted with oil at a temperature between 21°C and 38°C (70°F and 100°F), with the temperature recorded.

4.6.4.1 With the system outlet port plugged, the regulating fluid pressure valve shall withstand a hydrostatic pressure of 90 percent of the applicable cut-out pressure applied at the pressure inlet port. The combined leakage through the external drain and return line ports under this condition shall not exceed one-half of one percent of rated flow.

4.6.4.2 With the applicable cut-out pressure applied to the system outlet port, the combined leakage from the external drain and return line ports shall not exceed 10 drops in the first minute and five drops in the following three minutes. The leakage through the pressure inlet port under this condition shall not exceed three drops in five minutes. There shall be no external leakage under these conditions. Pressure shall be applied with an accumulator in the line to avoid surging.

4.6.5 Pressure drop. The rate of flow shall be accurately maintained. A suitable means for accurately measuring the pressure drop shall be used. Pressure drop from the inlet to the system outlet shall be measured with the valve in the cut-in position. In measuring pressure drop from the inlet to return ports, rated cut-out pressure shall be applied and maintained on the system outlet port. At rated flow, the pressure drop from the pressure inlet port to the system outlet port shall not exceed 50 psi, and the pressure drop from the pressure inlet port to the return port shall not exceed 70 psi.

4.6.6 Operating pressure range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

*4.6.6.1 Test apparatus. The test apparatus shall be arranged as shown in Figure 1. Hydraulic pressure shall be applied by means of a power-driven pump with an accumulator installed having sufficient capacity that the maximum rated flow through the valve will not cause filling of the accumulator so rapidly as to preclude the accurate determination of pressure variations. Provisions shall be made by means of a needle valve for bleeding out the pressure stored in the accumulator. The exact pressure at which the regulating fluid pressure valve actuates shall be recorded on a Bourdon tube-type continuous rolled chart recorder. The recorder will be actuated by flow in the flow indicator as shown in Figure 1.

4.6.6.2 Testing procedure. At least two cycles shall be completed under all of the following conditions, and cut-in (reloading) and cut-out (unloading) pressure shall not fluctuate outside the range specified in Table I.

(a) Qualification test:

(1) The input flow shall be varied from 1/2 gpm to 125 percent of rated flow at increments of approximately 10 percent of the rated flow. These flow settings shall be made by adjusting the accumulator bleed valve until the pressure rises to a value greater than 95 percent of the cut-out pressure. The pump flow control shall then be operated until the desired pump flow rate is indicated on the bleed line flow meter.

(2) The bleed shall be set at five percent, 50 percent, and 90 percent of input flow, respectively, at each rate of input flow.

(3) The return line back pressure shall be set at 0 psi and 750 psi for 1500 psi units; 0 psi and 1500 psi for 3000 psi units at each bleed setting, and the operating pressure range checked for each condition.

(b) Acceptance test:

(1) The input flow shall be set at 1/2 gpm, 50 percent of rated flow, and 100 percent of rated flow.

(2) The bleed shall be set at five percent and 80 percent of the input flow at each rate of input flow listed in b(1) above.

4.6.7 Extreme temperature operation.

4.6.7.1 High temperatures. The valve shall be connected substantially as shown in Figure 2, the system bled, and the temperature of the entire set-up maintained at 71°C (160°F) minimum for a period of not less than six hours. At the end of this period, rated flow shall be applied to the valve with the temperature maintained at 160°F minimum and the accumulator bled slowly. A minimum of five cycles of operation of the valve shall be completed in order to check the operating pressure

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.


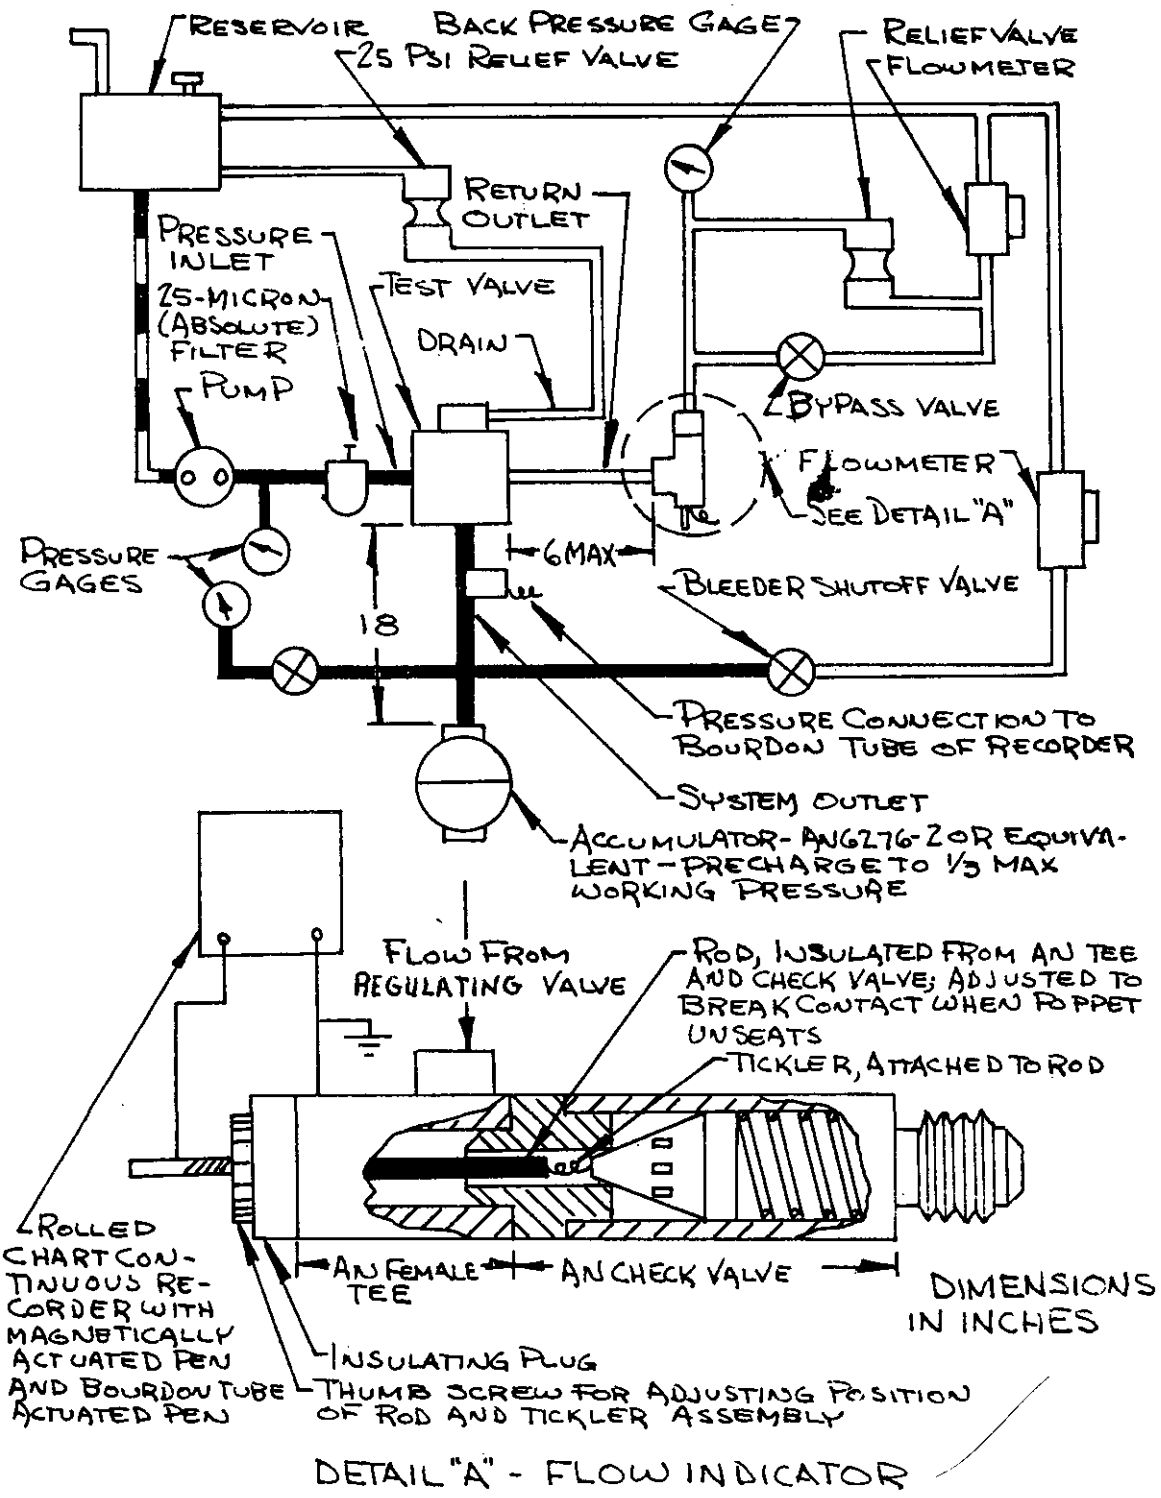


FIGURE 1. *Set-up for operating pressure range and endurance tests.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

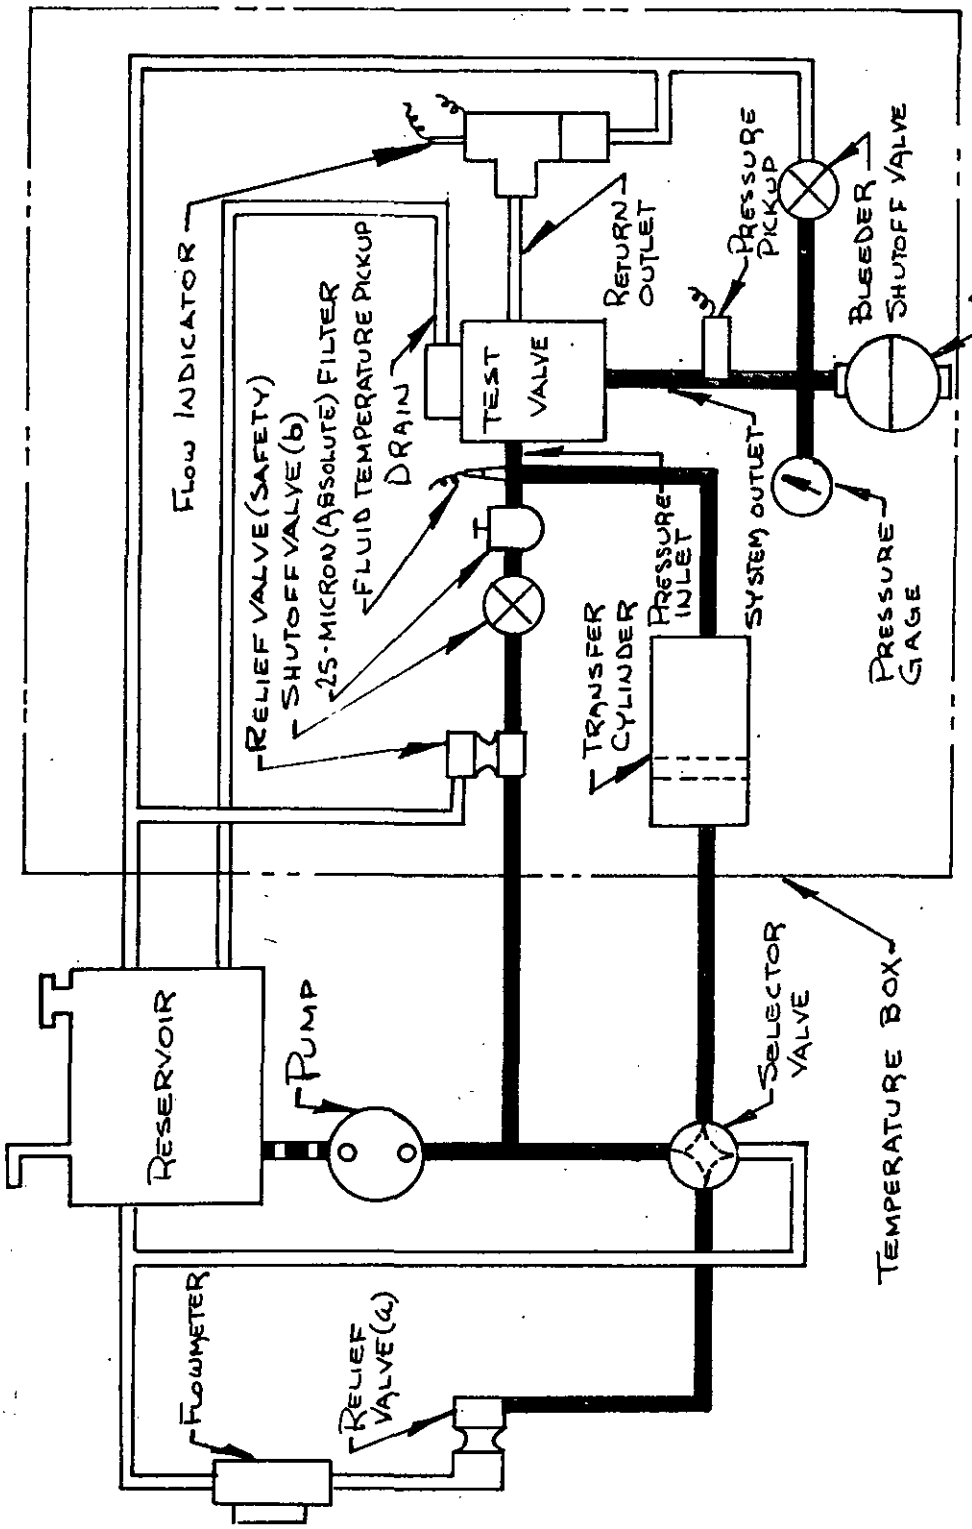

(a) Selector valve used for switching pump flow through relief valve (4) and transfer cylinder
(b) Pump flow rate shall be adjusted with relief valve (4) adjusted to give the applicable regulating valve cutout pressure.
(c) Shutoff valve (b) used for filling and bleeding circuit and for by passing transfer cylinder.

FIGURE 2. *Set-up for extreme temperature operation range test.*

Source: https://assist.dla.mil Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

range. The range of the AN6206-1-2 and AN6295-1-2 valves shall be checked at both the low and high pressure settings. The operating pressure range during this test shall not exceed the values specified herein, and there shall be no external leakage.

*4.6.7.2 Low temperatures. The valve shall be connected substantially as shown in Figure 2, the system bled, and the entire set-up maintained at a temperature not warmer than minus 54°C (minus 65°F) for a period of 24 hours minimum. With the bleed valve cracked, a minimum flow equal to 25 percent of the rated flow for the valve shall then be applied and the cut-out and cut-in pressure determined with the fluid temperature not warmer than minus 54°C (minus 65°F). At least three cycles shall be completed at this temperature. The AN6206-1-2 and AN6295-1-2 valves shall be adjusted to the high pressure operating range for this test. The operating range shall not fluctuate outside the specified limits by more than five percent of the maximum range permitted in Table I, and there shall be no external leakage throughout the testing period.

4.6.7.3 Rapid warmup. The circuit used in the low temperature test shall be allowed to warmup rapidly with the valve in the cut-out condition (bleeder shutoff closed). When the fluid temperature reaches approximately minus 29°C (minus 20°F), rated flow shall be applied to the valve and the accumulator bled, without waiting for the valve and the fluid temperature to stabilize. At least two cycles of operation shall be completed under this condition. The bleeder shutoff valve shall then be closed again and the warmup continued, with rated flow applied to the valve. At least four additional operational checks of five cycles each shall be performed while the valve warms up to plus 40°F. The operating pressure range shall not fluctuate more than five percent outside the limits specified herein, and there shall be no external leakage.

4.6.8 Endurance. Pressure shall be applied in a manner similar to that for the operating pressure range test with a test set-up as shown in Figure 1. Sufficient leakage shall be provided by means of a bleeder valve to allow approximately 30 cycles of operation per minute. A method of counting the cycles of operation shall be employed, and the pressure range for every 5000th cycle of operation shall be recorded. After 100,000 cycles of operation, the operating pressure range test shall be repeated. Fluctuating of operating pressure range shall not exceed the specified limits by more than ± 25 psi after completion of the endurance test. Leakage shall not exceed twice the amount specified under the leakage test. Upon disassembly there shall be no evidence of excessive wear or deterioration. During the endurance cycling the operating pressure range for the AN6206-1-2 valves shall be 1250 to 1500 psi and the range for the AN6295-1-2 valves shall be 2600 to 3000 psi, but both valves shall be

Source: https://assist.dla.mil - Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

tested at both the high and low pressure ranges after the endurance cycling is completed.

*4.6.9 Burst pressure. The regulating fluid pressure valve shall withstand a pressure equal to two and one half times the applicable cut-out pressure without external leakage or failure. Pressure shall be applied in the manner outlined in 4.6.3 and the rate of pressure increase shall not exceed 25,000 psi per minute. Leakage through the drain port shall not be cause for rejection.

4.6.10 Treatment. Following all sampling, inspection, and test procedures specified above, each valve shall be cleaned externally and internally until free from all foreign material such as metal chips, grit, dirt, etc., resulting from manufacture, handling, or storage. Each valve shall then be internally flushed with hydraulic preservative oil conforming to Specification MIL-H-6083, which has been filtered of all foreign matter over a 10 micron (25 micron absolute) filter, and capped or plugged with closures conforming to Specification MIL-C-5501, to prevent oil leakage.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (see 6.2).

*5.1.1 Level A. Unless otherwise specified in the contract or order, each valve shall be preserved Method 1A-8 in accordance with Specification MIL-P-116. Each valve shall be securely packed in a container conforming to Specification PPP-B-566.

5.1.2 Level C. Each valve shall be preserved and packaged in a manner which will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity for immediate use.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

*5.2.1 Level(s) A, B or C. The level of packing shall be specified by the procuring activity. The level of packing shall be accomplished in accordance with the requirements outlined in MIL-STD-794.

5.3 Marking. In addition to any special marking required by the contract or order, marking shall be in accordance with Military Standard MIL-STD-129 and ANA Bulletin No. 438.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The regulating fluid pressure valve covered by this specification is used to automatically unload a fixed displacement pump by passing the flow from the pressure port to the return port when system is at the required level.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification
(b) Applicable AN and manufacturer's part number
(c) Level of packaging and packing required (see Section 5)

*6.3 Qualification. With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion on the applicable qualified products list whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the qualified products list is Oklahoma City Air Logistics Center (MMEO), Tinker AFB, Oklahoma 73145, and information pertaining to qualification of products may be obtained from that activity.

*6.4 Flow indication. The flow indicator shown in Detail A, Figure 1, functions in the following manner: Any flow through the return outlet of the regulating fluid pressure valve unseats the check valve poppet which breaks the electric circuit which causes the magnetically-actuated needle on the recorder to move. This gives a positive indication of flow.

*6.5 Hydraulic pressure settings. All AN6206-1-2 valves furnished under contract, other than direct Government procurement and indirect shipment such as spares, may be set by means of a hydraulic power pump to cut out at 1000 psi or 1500 psi +50-0 psi, and all AN6295-1-2 valves may be set to cut out at 1500 +50-0 psi or 3000+100-0 psi. This cut out pressure should be impressed on a lead seal attached to the lockwire of the setting adjustment. As the pressure adjustment is altered, this lead seal should be destroyed and replaced with a new lead seal or some other semipermanent seal, properly stamped with the new pressure setting, and attached to the lockwire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

*6.6 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

User:
Navy - AS

Preparing Activity:
Air Force - 71

Project Number:
4820-F301

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318



Oklahoma City ALC/MMEO
Tinker AFB, OK 73145

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED C 1 6 0 6 / 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:06Z
Check the source to verify that this is the current version before use.