QUALIFICATION REQUIREMENTS REMOVED

MIL-M-38510/441A
9 August 1983
SUPERSEDING
MIL-M-38510/441(USAF)
26 July 1979

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, LOW POWER SCHOTTKY TTL,
BUS TRANSCEIVER, MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER DATE OF THIS REVISION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, Schottky TTL bus transceiver microcircuits. One product assurance class and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510 with the exception that the "JAN" or "J" certification mark shall not be used.

1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	Quad two-input bus transceiver (open collector outputs)
02	Quad two-input bus transceiver (open collector outputs) with parity
03	Quad bus transceiver (open collector outputs) with parity
04	Quad two-input bus transceiver (three-state outputs)
05	Quad two-input bus transceiver (three-state outputs) with parity
06	Quad bus transceiver (three-state outputs) with parity

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
J	D-3 (24-pin, 1/2" x 1-1/4"), dual-in-package
Z	F-8 (24-pin, 1/4" x 3/8"), flat package
R	D-8 (20-pin, 1/4" x 1-1/16"), dual-in-line package
S	F-9 (20-pin, 1/4" x 1/2"), flat package

1.3 Absolute maximum ratings.

DC voltage applied to outputs for disabled output state	-0.5 V dc to V_{CC} maximum
Supply voltage range	-0.5 V dc to +7.0 V dc
Input voltage range	-0.5 V dc at +5.5 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation, (P_D) 1/:	
Device types 01, 02, 03, 04, 05, 06	1.0 W
DC output current, into outputs:	
Receiver and parity	30 mA
DC output current, into outputs:	
Bus (types 01, 02, 03)	200 mA

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

DC output current, into outputs:	
Bus (types 04, 05, 06)- - - - - - - - - -	100 mA
DC input current- - - - - - - - - - - - - -	-30 mA to +5 mA
Case operating temperature range (T_C) -	-55°C to +125°C
Lead temperature (soldering, 10 seconds)-	+300°C
Thermal resistance, junction-to-case (θ_{JC}):- - - - - - - - - - - -	0.09°C/mW for flat package 0.08°C/mW for dual-in-line package
Junction temperature (T_J) - - - - - - -	+175°C

1.4 Recommended operating conditions.

Supply voltage range- - - - - - - - - - - -	4.5 V dc minimum to 5.5 V dc maximum
Minimum high-level input voltage (all except bus receiver type 01) - - -	2.0 V dc
Minimum high-level input voltage (bus receiver type 01)- - - - - - - - -	2.4 V dc
Maximum low level input voltage (all except bus receiver type 01) - - -	0.8 V dc
Maximum low level input voltage (bus receiver type 01)- - - - - - - - -	1.5 V dc

	Device type			
Setup time, $t_{(setup)}$	01/02	03	04/05	06
Data to driver clock - - - - - - - - - -	25 ns	25 ns	15 ns	15 ns
Select to driver clock - - - - - - - - -	33 ns		28 ns	
Bus receiver to latch enable - - - - - -	21 ns	21 ns	15 ns	15 ns
Hold time $t_{(hold)}$				
Data to driver clock - - - - - - - - - -	8 ns	8 ns	8 ns	8 ns
Select to driver clock - - - - - - - - -	8 ns		8 ns	
Bus receiver to latch enable - - - - - -	7 ns	7 ns	6 ns	6 ns
Pulse width, $t_{(pw)}$				
Driver clock - - - - - - - - - - - - - -	28 ns	28 ns	20 ns	20 ns

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510, and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Logic diagram. The logic diagram shall be as specified on figure 3.

3.2.3 Truth tables. The truth tables shall be as specified on figure 2.

3.2.4 Case outlines. Case outlines shall be as specified in MIL-M-38510 and in 1.2.3 herein.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container. The "JAN" or "J" certification mark shall not be used.

3.7 Manufacturer eligibility. To be eligible to supply microcircuits to this specification, a manufacturer shall have a manufacturer certification in accordance with MIL-M-38510 for at least one line; not necessarily the line producing the device type described herein.

3.8 Certification. Certification in accordance with MIL-M-38510 is not required for this device.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Qualification inspection. Qualification inspection is not required.

4.3 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D or E, using the circuit shown on figure 5, or equivalent.

(2) T_A = +125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

c. The percent defective allowable (PDA) for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510, and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4). Generic test data (see 6.6) may be used to satisfy the requirements for groups C and D inspections. Quality conformance inspection shall be completed on the specific devices covered by this specification before they are shipped.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I, method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical paramters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical test parameters shall be as specified in table II herein.

b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.

c. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 5, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 End-point electrical parameters shall be as specified in table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions	Device	Limits Min	Limits Max	Unit
High-level output voltage bus outputs	V_{OH1}	V_{CC} = 4.5 V dc; I_{OH} = -15 mA	04, 05, 06	2.4		V
High-level output voltage, receiver outputs	V_{OH2}	V_{CC} = 4.5 V dc; I_{OH} = -1 mA	01, 02, 03, 04, 05, 06	2.4		V
High-level output voltage, parity output	V_{OH3}	V_{CC} = 4.5 V dc; I_{OH} = -660 µA	02, 03, 05, 06	2.5		V
Low-level output voltage bus outputs	V_{OL1}	V_{CC} = 4.5 V dc; I_{OL} = 40 mA	01, 02, 03		0.5	V
	V_{OL3}	V_{CC} = 4.5 V dc; I_{OL} = 70 mA			0.7	V
	V_{OL5}	V_{CC} = 4.5 V dc; I_{OL} = 100 mA			0.8	V
Low-level output voltage, bus outputs	V_{OL2}	V_{CC} = 4.5 V dc; I_{OL} = 24 mA	04, 05, 06		0.4	V
	V_{OL4}	V_{CC} = 4.5 V dc; I_{OL} = 48 mA			0.5	V
Low-level output voltage, receiver/parity outputs	V_{OL6}	V_{CC} = 4.5 V dc; I_{OL} = 4 mA	01, 02, 03, 04, 05, 06		0.4	V
	V_{OL7}	V_{CC} = 4.5 V dc; I_{OL} = 8 mA			0.45	V
	V_{OL8}	V_{CC} = 4.5 V dc; I_{OL} = 12 mA			0.5	V
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V; I_{IN} = -18 mA	01, 02, 03, 04, 05, 06		-1.2	V
Low-level input current, $\overline{BE}$, $\overline{RLE}$	I_{IL1}	V_{CC} = 5.5 V; V_{IN} = 0.4 V	01,02, 03		-0.36	mA
Low-level input current, $\overline{BE}$, $\overline{RLE}$	I_{IL2}	V_{CC} = 5.5 V; V_{IN} = 0.4 V	04, 05, 06		-0.72	mA
Low-level input current, all other inputs	I_{IL3}	V_{CC} = 5.5 V; V_{IN} = 0.4 V	01, 02, 03, 04, 05, 06		-0.36	mA
High-level input current	I_{IH1}	V_{CC} = 5.5 V; V_{IN} = 2.7 V	01, 02, 03, 04, 05, 06		20	µA
High-level input current	I_{IH2}	V_{CC} = 5.5 V; V_{IN} = 5.5 V	01, 02, 03, 04, 05, 06		100	µA
High impedance state output leakage current low, receiver outputs	I_{ZL1}	V_{CC} = 5.5 V; V_{OUT} = 0.4 V	01, 03		-20	µA
			04, 06		-50	µA
High impedance state output leakage current low, bus outputs	I_{ZL2}	V_{CC} = 5.5 V; V_{OUT} = 0.4 V	01, 02 03		-50	µA

Source: https://assist.dla.mil -- Downloaded: 2022-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions	Device	Limits Min	Limits Max	Unit
High impedance state output leakage current low, bus outputs	I_{ZL3}	V_{CC} = 5.5 V; V_{OUT} = 0.4 V	04,05 06		-200	µA
High impedance state output leakage current high, receiver outputs	I_{ZH1}	V_{CC} = 5.5 V; V_{OUT} = 2.4 V	01,03		20	µA
			04,06		50	
High impedance state output leakage current high, bus outputs	I_{ZH2}	V_{CC} = 5.5 V; V_{OUT} = 4.5 V	01,02 03		200	µA
High impedance state output leakage current high, bus outputs	I_{ZH3}	V_{CC} = 5.5 V; V_{OUT} = 4.5 V	04,05 06		100	µA
	I_{ZH4}	V_{OUT} = 2.4 V			50	µA
High impedance state output leakage current high, bus outputs with power off	I_{ZH5}	V_{CC} = 0 V; V_{OUT} = 4.5 V	01,02, 03,04, 05,06		100	µA
Short-circuit output current, bus outputs	I_{OS1}	V_{CC} = 5.5 V; V_{OUT} = 0 V	04,05 06	-50	-225	mA
Short-circuit output current, receiver outputs	I_{OS2}	V_{CC} = 5.5 V; V_{OUT} = 0 V	01,02, 03,04, 05,06	-30	-130	mA
Short-circuit output current, parity outputs	I_{OS3}	V_{CC} = 5.5 V; V_{OUT} = 0 V	02,03, 05,06	-20	-100	mA
Supply current	I_{CC}	V_{CC} = 5.5 V; All inputs = GND	01,02		105	mA
Supply current	I_{CC}	V_{CC} = 5.5 V; All inputs = GND	03,05		110	mA
Supply current	I_{CC}	V_{CC} = 5.5 V; All inputs = GND	04		95	mA
Supply current	I_{CC}	V_{CC} = 5.5 V; All inputs = GND	06		95	mA
To low level, from driver clock to bus out	t_{PHL1}	$\overline{BUS}$ outputs, device types 01,02,03: C_L = 50 pF	01,02, 03		40	ns
		R_L = 50Ω	04,05, 06		36	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions	Device	Limits Min	Limits Max	Unit
To low level, from bus to receiver out	t_{PHL2}	$\overline{BUS}$ outputs, device types 04,05,06: C_L = 50 pF, R_L = 130Ω	01,02,03		37	ns
			04,05,06		30	ns
To low level, from latch enable to receiver out	t_{PHL3}	Receiver/parity outputs, device types 01,02,03,04,05,06: C_L = 15 pF, R_L = 2 kΩ, V_{CC} = 5.0 V all device types	01,02,03		37	ns
			04,05,06		30	ns
To low level, from data to odd parity out	t_{PHL4}	$\overline{BUS}$ outputs, device types 01,02,03: C_L = 50 pF, R_L = 50Ω	02,03		40	ns
			05,06		40	ns
To low level, from bus to odd parity out	t_{PHL5}	$\overline{BUS}$ outputs, device types 04,05,06: C_L = 50 pF, R_L = 130Ω	02,03		40	ns
			05,06		36	ns
To low level, from latch enable to odd parity out	t_{PHL6}	Receiver/parity outputs, device types 01, 02, 03, 04, 05, 06: C_L = 15 pF, R_L = 2 kΩ, V_{CC} = 5.0 V all device types	01,02,03		40	ns
			04,05,06		36	ns
To high level, from driver clock to bus out	t_{PLH1}		01,02,03		40	ns
			04,05,06		36	ns
To high level, from bus to receiver out	t_{PLH2}		01,02,03		37	ns
			04,05,06		33	ns
To high level, from latch enable to receiver out	t_{PLH3}		01,02,03		37	ns
			04,05 06		33	ns
To high level, from data to odd parity out	t_{PLH4}		02,03		40	ns
			05,06		46	ns
To high level, from bus to odd parity out	t_{PLH5}		02,03		40	ns
			05,06		36	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions	Device	Limits Min	Limits Max	Unit
To high level, from latch enable to odd parity out	t_{PLH6}	$\overline{BUS}$ outputs, device types 01,02,03: C_L = 50 pF, R_L = 50Ω	02,03		40	ns
			05,06		36	ns
To low level, from bus enable to bus out	t_{PZL1}	$\overline{BUS}$ outputs, device types 04,05,06: C_L = 50 pF, R_L = 130Ω	01,02, 03,04, 05,06		26	ns
To low level, from output enable to receiver out	t_{PZL2}	Receiver/parity outputs, device types 01, 02, 03, 04, 05, 06: C_L = 15 pF, R_L = 2 kΩ	01,03		28	ns
			04,06		26	ns
To high level, from bus enable to bus out	t_{PZH1}	V_{CC} = 5.0 V all device types	04,05, 06		26	ns
To high level, from output enable to receiver out	t_{PZH2}		01,03		28	ns
			04,06		26	ns
To high impedance, from bus enable to bus out (low)	t_{PLZ1}		01,02, 03		26	ns
			04,05, 06		21	ns
To high impedance, from output enable to receiver out (low)	t_{PLZ2}		01,03		28	ns
			04,06		26	ns
To high impedance, from bus enable to bus out (high)	t_{PHZ1}		04,05, 06		21	ns
To high impedance, from output enable to receiver out (high)	t_{PHZ2}		01,03		28	ns
			04,06		26	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)
	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1
Final electrical test parameters (method 5004)	1*,2,3,7, 9,10,11
Group A test requirements (method 5005)	1,2,3,7,8, 9,10,11
Groups C end-point electrical parameters (method 5005)	N/A
Additional electrical subgroups for group C periodic inspections	N/A
Group D end point electrical parameters (method 5005)	1,2,3

*PDA applies to subgroup 1 (see 4.3c).

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging of microcircuits shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for logistic support of existing equipment.

6.3 Ordering data. The contract or purchase order should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.


d. Requirements for notification of change of product or process to the contracting activity, if applicable.

e. Requirements for packaging and packing.


f. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

Source: https://assist.dla.mil -- Downloaded: 202640-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 01, 04

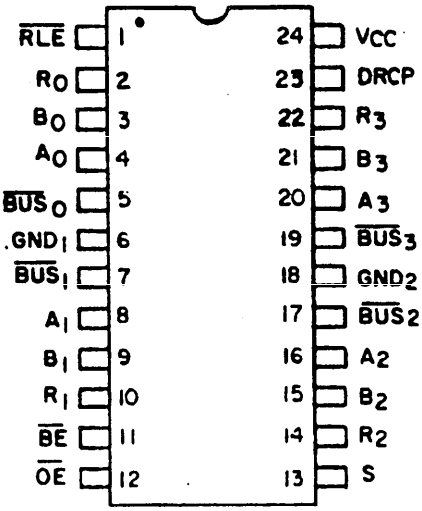

Device types 02, 05

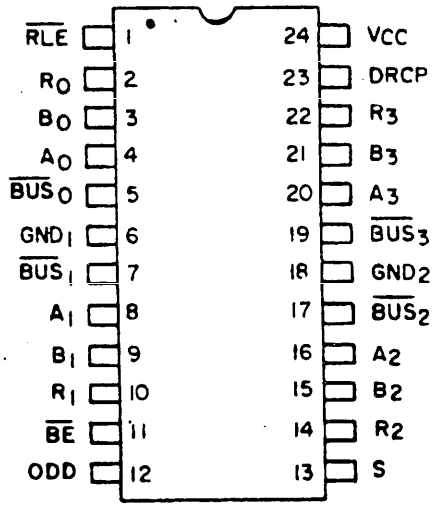

Device types 03, 06

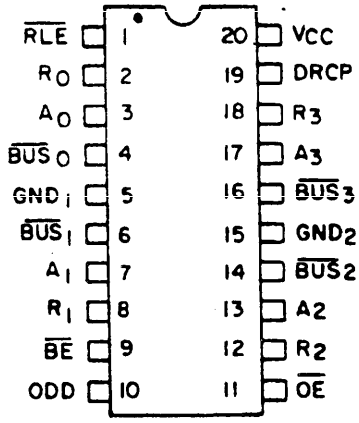


FIGURE 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 01, 04

INPUTS							INTERNAL TO DEVICE		BUS	OUTPUT	FUNCTION
S	A_i	B_i	DRCP	$\overline{BE}$	$\overline{RLE}$	$\overline{OE}$	D_i	Q_i	$\overline{BUS}_i$	R_i	
X	X	X	X	H	X	X	X	X	Z	X	Driver output disable
X	X	X	X	X	X	H	X	X	X	Z	Receiver output disable
X	X	X	X	H	L	L	X	L	L	H	Driver output disable and receive data via Bus input
X	X	X	X	H	L	L	X	H	H	L	
X	X	X	X	X	H	X	X	NC	X	X	Latch received data
L	L	X	↑	X	X	X	L	X	X	X	Load driver register
L	H	X	↑	X	X	X	H	X	X	X	
H	X	L	↑	X	X	X	L	X	X	X	
H	X	H	↑	X	X	X	H	X	X	X	
X	X	X	L	X	X	X	NC	X	X	X	No driver clock restrictions
X	X	X	H	X	X	X	NC	X	X	X	
X	X	X	X	L	X	X	L	X	H	X	Drive Bus
X	X	X	X	L	X	X	H	X	L	X	

H = HIGH
L = LOW
Z = HIGH impedance
NC = No change
X = Don't care
↑ = LOW to HIGH transition
i = 0, 1, 2, 3

Device type 02, 05

INPUTS							INTERNAL TO DEVICE		BUS	OUTPUT	FUNCTION
S	A_i	B_i	DRCP	$\overline{BE}$	$\overline{RLE}$	$\overline{OE}$	D_i	Q_i	$\overline{BUS}_i$	R_i	
X	X	X	X	H	X	X	X	X	Z	X	Driver output disable
X	X	X	X	X	X	H	X	X	X	Z	Receiver output disable
X	X	X	X	H	L	L	X	L	L	H	Driver output disable and receive data via Bus input
X	X	X	X	H	L	L	X	H	H	L	
X	X	X	X	X	H	X	X	NC	X	X	Latch received data
L	L	X	↑	X	X	X	L	X	X	X	Load driver register
L	H	X	↑	X	X	X	H	X	X	X	
H	X	L	↑	X	X	X	L	X	X	X	
H	X	H	↑	X	X	X	H	X	X	X	
X	X	X	L	X	X	X	NC	X	X	X	No driver clock restrictions
X	X	X	H	X	X	X	NC	X	X	X	
X	X	X	X	L	X	X	L	X	H	X	Drive Bus
X	X	X	X	L	X	X	H	X	L	X	

H = HIGH
L = LOW
Z = HIGH impedance
NC = No change
X = Don't care
↑ = LOW-to-HIGH transition
i = 0, 1, 2, 3

$\overline{BE}$	ODD PARITY OUTPUT
L	ODD = $A_0 \oplus A_1 \oplus A_2 \oplus A_3$
H	ODD = $Q_0 \oplus Q_1 \oplus Q_2 \oplus Q_3$

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 03, 06

INPUTS					INTERNAL TO DEVICE		BUS	OUTPUT	FUNCTION
A_i	DRCP	$\overline{BE}$	$\overline{RLE}$	$\overline{OE}$	D_i	Q_i	B_i	R_i	
X	X	H	X	X	X	X	H	X	Driver output disable
X	X	X	X	H	X	X	X	Z	Receiver output disable
X	X	H	L	L	X	L	L	H	Driver output disable and receive data via Bus input
X	X	H	L	L	X	H	H	L	
X	X	X	H	X	X	NC	X	X	Latch received data
L	↑	X	X	X	L	X	X	X	Load driver register
H	↑	X	X	X	H	X	X	X	
X	L	X	X	X	NC	X	X	X	No driver clock restrictions
X	H	X	X	X	NC	X	X	X	
X	X	L	X	X	L	X	H	X	Drive Bus
X	X	L	X	X	H	X	L	X	

H = HIGH Z = High Impedance X = Don't Care i = 0, 1, 2, 3
L = LOW NC = No Change ↑ = LOW-to-HIGH Transition

$\overline{BE}$	ODD PARITY OUTPUT
L	ODD = $A_0 \oplus A_1 \oplus A_2 \oplus A_3$
H	ODD = $Q_0 \oplus Q_1 \oplus Q_2 \oplus Q_3$

FIGURE 2. Truth table - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 01, 04


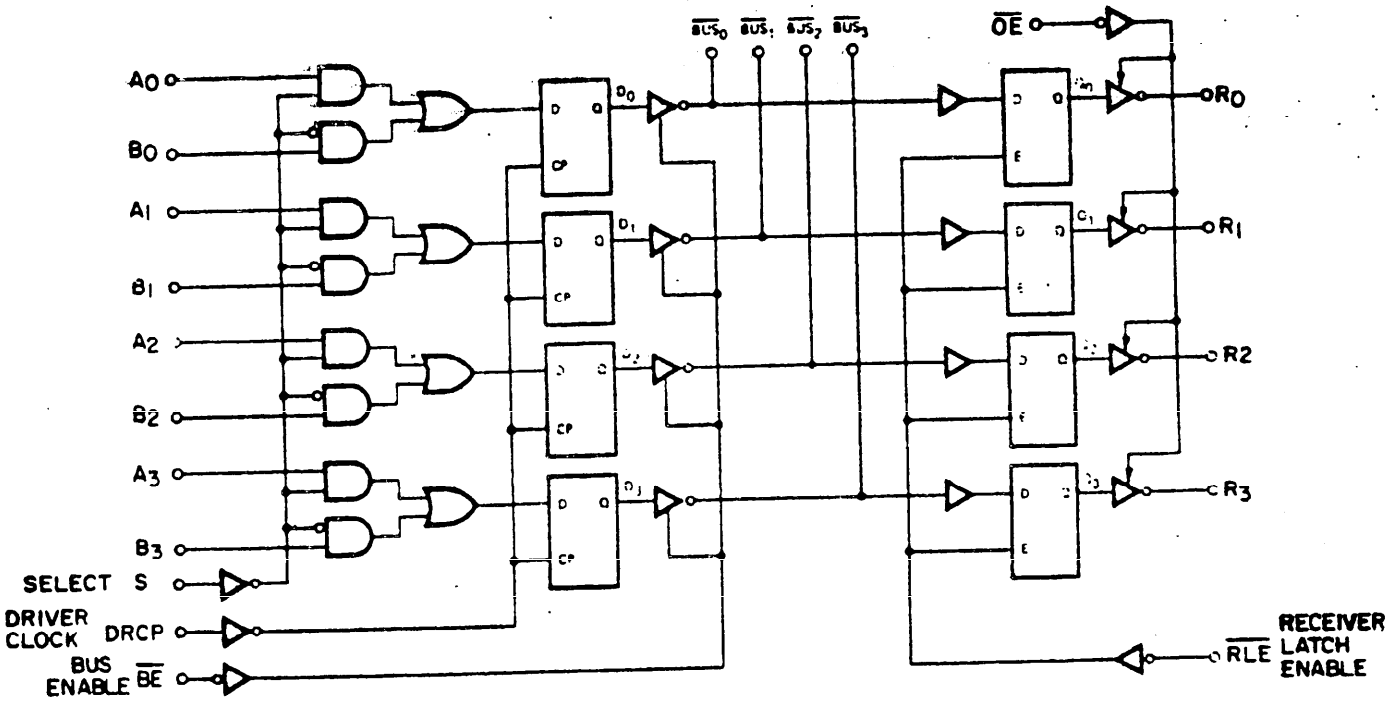


FIGURE 3. Logic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device type 02, 05

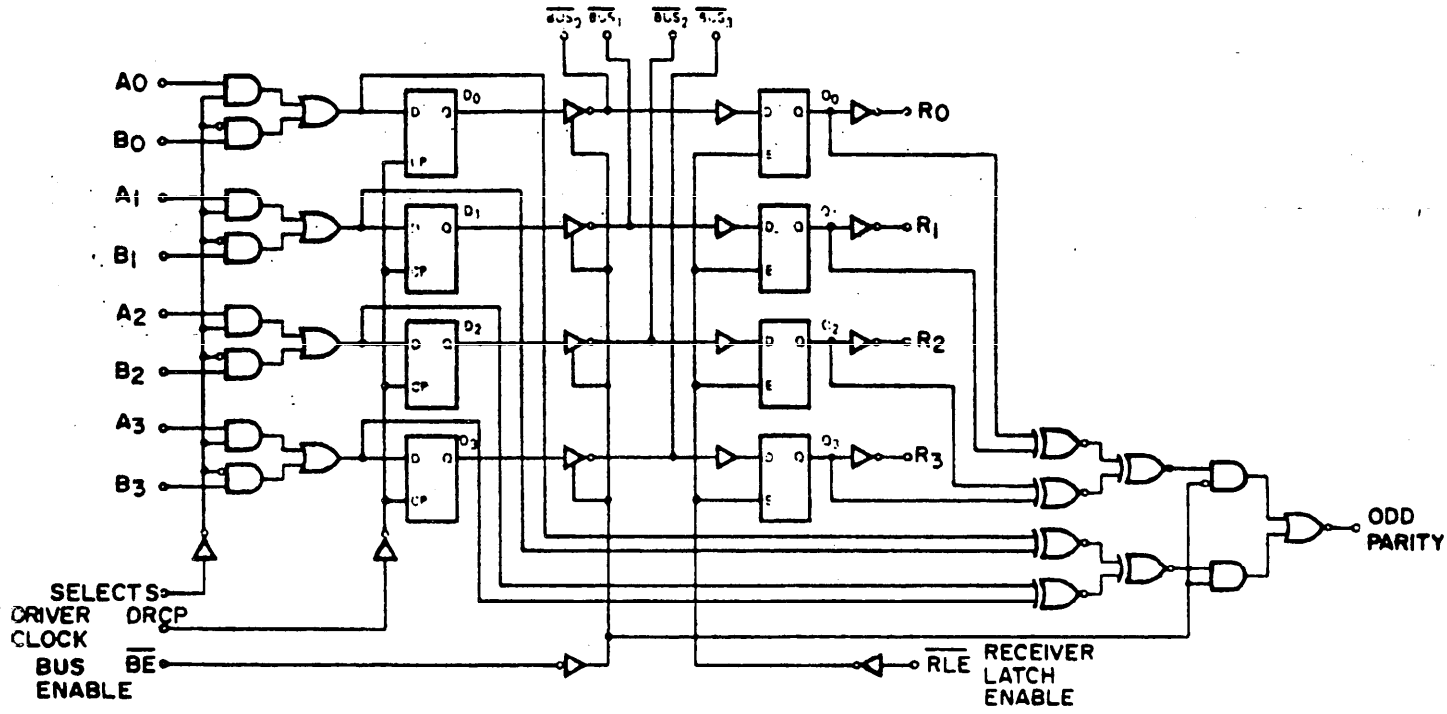

Device type 03, 06


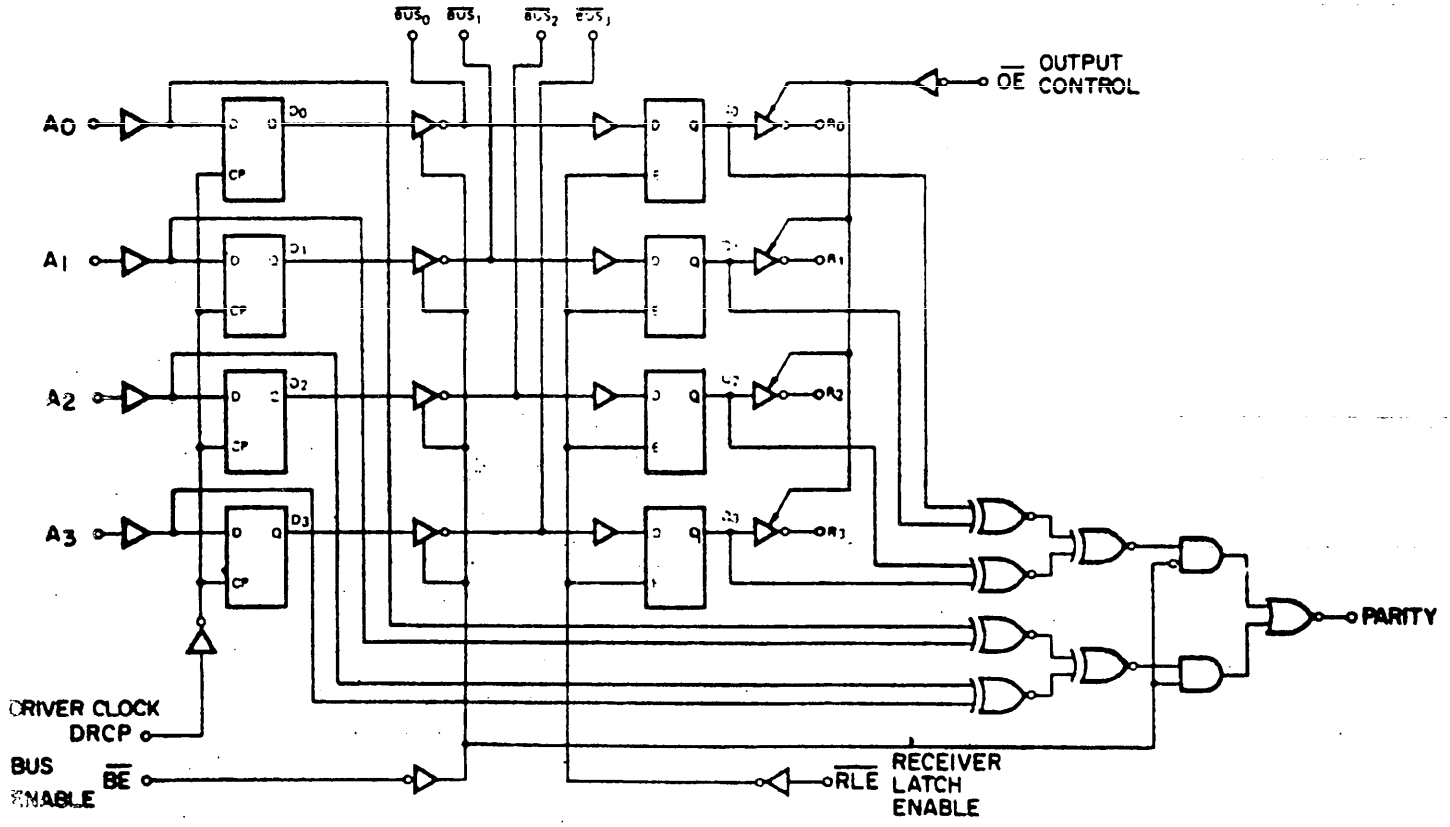


FIGURE 3. Logic diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Input/output equivalent circuits

Device type 01, 02, 03




Inputs other than BUS

R value (Ω)


Device type

Input	01	02	03
A	10k	10k	5k
B	10k	10k	-
S	10k	10k	-
DRCP	10k	10k	10k
$\overline{RLE}$	5k	5k	5k
$\overline{BE}$	3.3k	3.3k	3.3k
$\overline{OE}$	5k	-	5k

Device type 01, 02 and 03

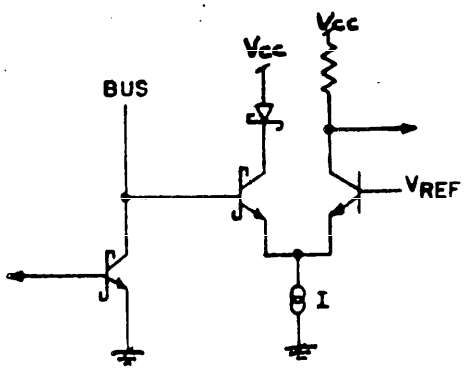


BUS I/O port

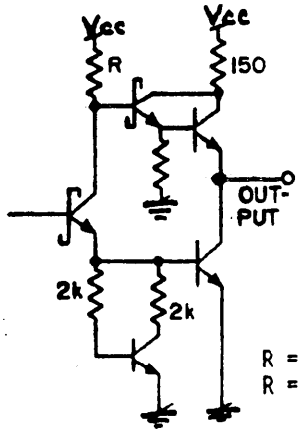

R = 4.8k for type 01, 02
R = 5.4k for type 03

Receiver output


R = 2.7 k for 02
R = 4.8 k for 03

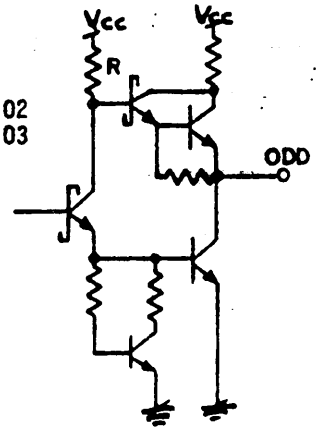


odd parity output

FIGURE 4. Schematic circuits.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

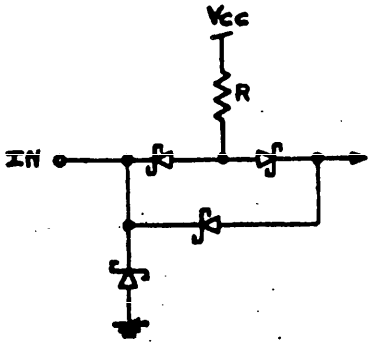

	Input	Type
R = 20 kΩ for	A, DRCP	04, 05, and 06
	B, S	04, 05
	$\overline{OE}$	04, 06
R = 10 kΩ	$\overline{BE}$, $\overline{RLE}$	04, 05, 06

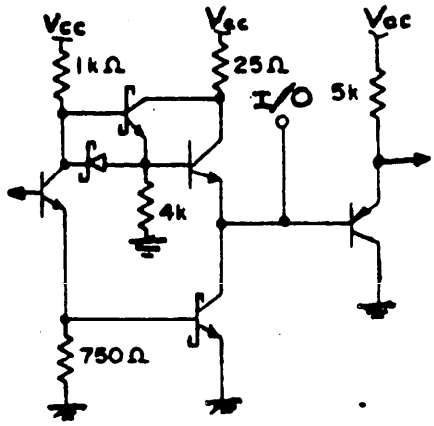

BUS I/O port type 04, 05 and 06

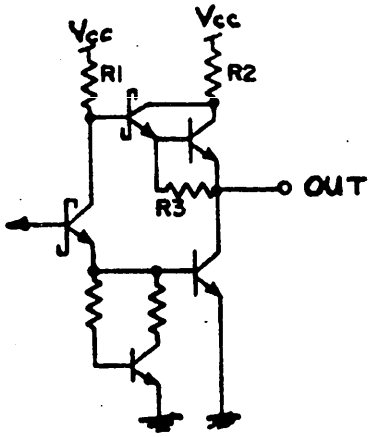


	Receiver type 04, 05 and 06	Odd parity type 05, 06
R_1	5.4 kΩ	2.7 kΩ
R_2	60Ω	75Ω
R_3	1kΩ	4kΩ

Receiver and odd parity outputs

FIGURE 4. Schematic circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device type 01, 04

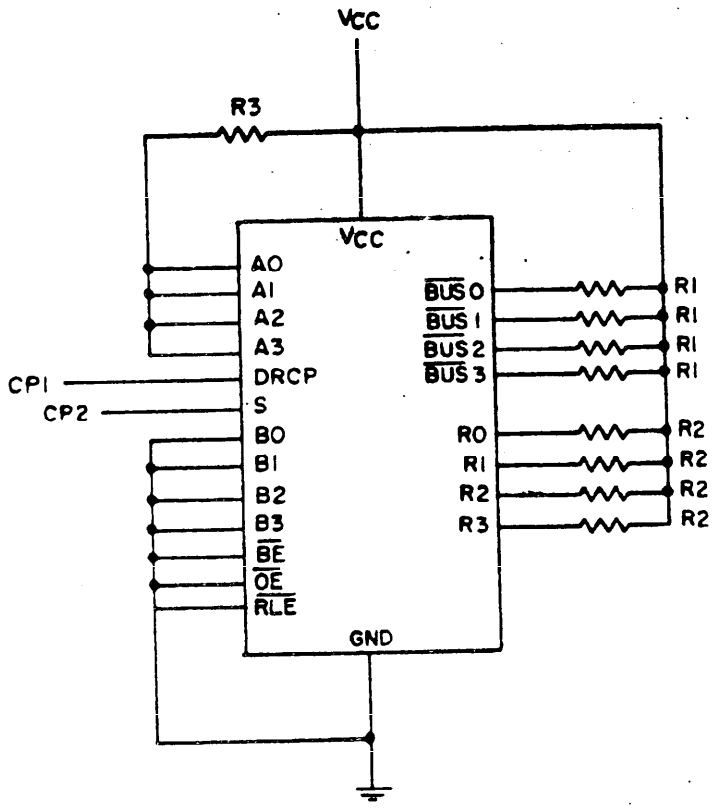

NOTES:
1. V_{cc} = 5.5 V
2. R_1 = 140Ω ±5%; R_2 = 1.4 kΩ ±5%; R_3 = 1 kΩ ±5%.
3. CP1 ≤ 1 MHz ±10%; duty cycle = 50 ±10%; V_{IH} = 2.0 V to 5.5 V; V_{IL} = -0.5 V to 0.8 V.

$CP2 = \frac{CP1}{2}$


V_{IH} = 2.0 V to 5.5 V;
V_{IL} = -0.5 V to 0.8 V



FIGURE 5. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 02, 05

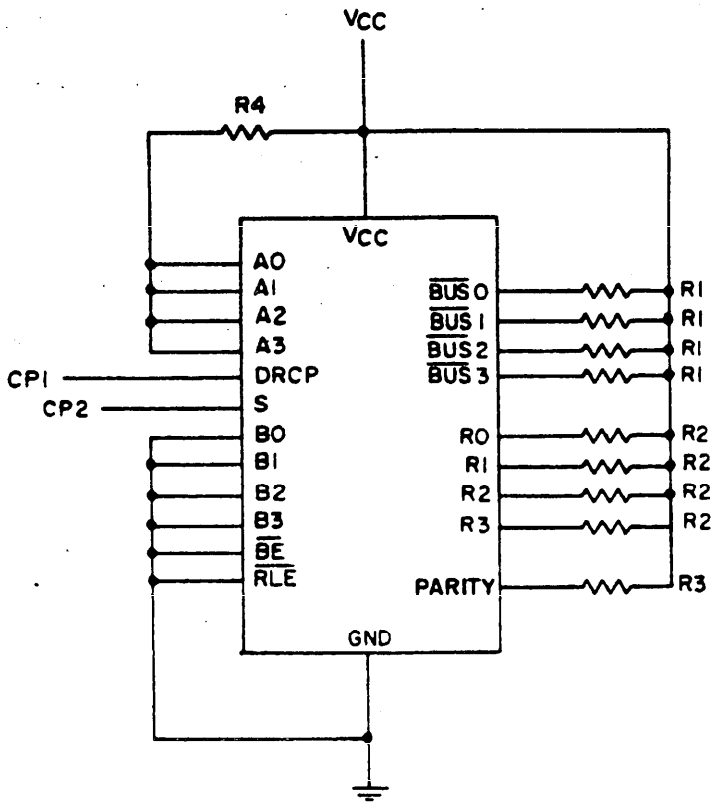

NOTES:
1. V_{CC} = 5.5 V
2. R_1 = 230Ω ±5%; R_2 = R_3 = 1.4 kΩ ±5%; R_4 = 1 kΩ ±5%.
3. CP1 ≦ 1 MHz ±10%; duty cycle = 50 ±10%; V_{IH} = 2.0 V to 5.5 V; V_{IL} = -0.5 V to 0.8 V

   $CP2 = \frac{CP1}{2}$

   V_{IH} = 2.0 V to 5.5 V

   V_{IL} = -0.5 V to 0.8 V.





FIGURE 5. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 03, 06

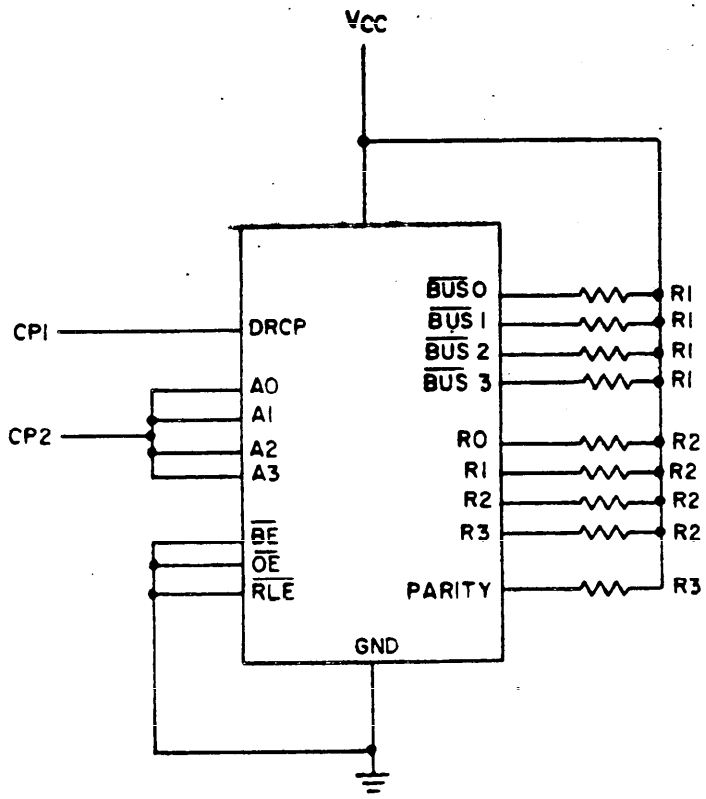


NOTES:
1. V_{CC} = 5.5 V.
2. R_1 = 230Ω ±5%; R_2 = R_3 = 1.4 kΩ ±5%.
3. CP1 = 1 MHz ±10%; duty cycle = 50 ±10%; V_{IH} = 2.0 V to 5.5 V; V_{IL} = -0.5 V to 0.8 V
   CP2 = $\frac{CP1}{2}$
   V_{IH} = 2.0 V to 5.5 V
   V_{IL} = -0.5 V to 0.8 V



FIGURE 5. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:40Z
Check the source to verify that this is the current version before use.

Device types 01, 04

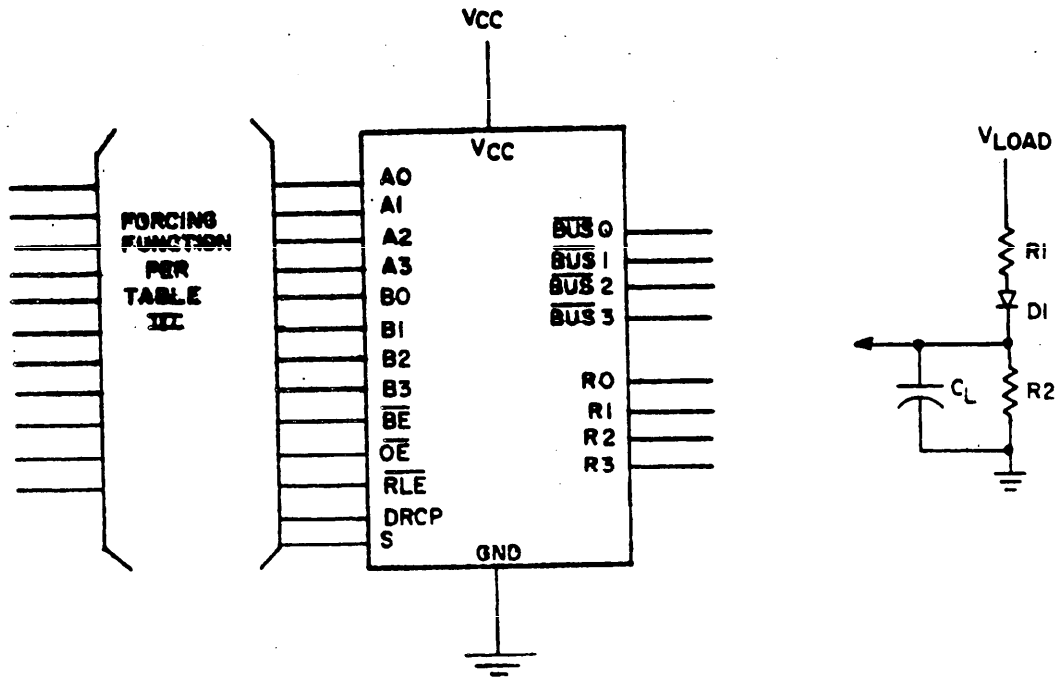


NOTES:
1. D_1 = 1N3064 or equivalent.
2. R_1 = 51Ω ±2%, type 01 "$\overline{BUS}$" outputs
   R_1 = 51Ω ±2%, type 04 "$\overline{BUS}$" outputs
   R_1 = 330Ω ±2%, type 01 and 02 "R" outputs
3. R_2 = 120Ω ±2%, type 01 "$\overline{BUS}$" outputs
   R_2 = 120Ω ±2%, type 04 "$\overline{BUS}$" outputs
   R_2 = 2.4 kΩ ±2%, types 01 and 04 "R" outputs
4. C_L = 50 pF ±10% and includes probe and jig capacitance.
5. V_{LOAD} = 5.0 V for device type 01 $\overline{BUS}$ outputs.
   V_{LOAD} = 2.5 V for device types 01, 04 R_X outputs and type 04 $\overline{BUS}$ outputs.

FIGURE 6. Switching waveforms

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

Device type 02, 05

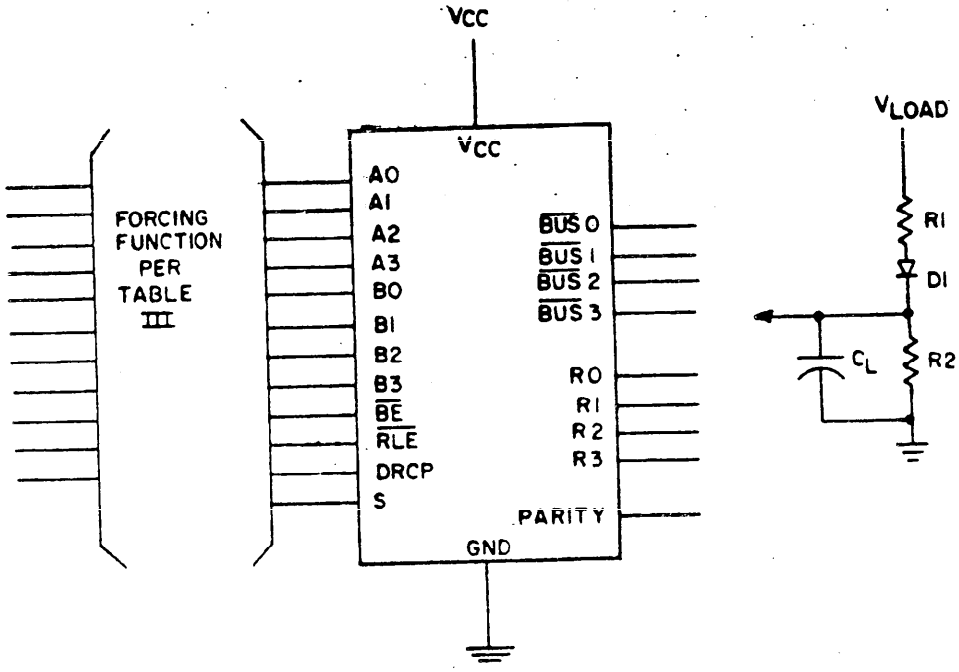


NOTES:
1. D_1 = 1N3064 or equivalent
2. R_1 = 51Ω ±2%, type 02 "$\overline{\text{BUS}}$" outputs
   R_1 = 51Ω ±2%, type 05 "BUS" outputs
   R_1 = 330Ω ±2%, "R" outputs
   R_1 = 340Ω ±1%, "Parity" output
3. R_2 = 120Ω ±2%, type 02 "$\overline{\text{BUS}}$" outputs
   R_2 = 120Ω ±2%, type 05 "BUS" outputs
   R_2 = 2.4 kΩ ±2%, "R" outputs
   R_2 = 3.83 kΩ ±1%, "Parity" output
4. C_L = 50 pF and includes probe and jig capacitance.
5. V_{LOAD} = 5.0 V for device type 02 $\overline{\text{BUS}}$ outputs.
   V_{LOAD} = 2.5 V for device types 02, 05 R_X and parity outputs and type 05 $\overline{\text{BUS}}$ outputs.

FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T14:40Z
Check the source to verify that this is the currentversion before use.

Device type 03, 06

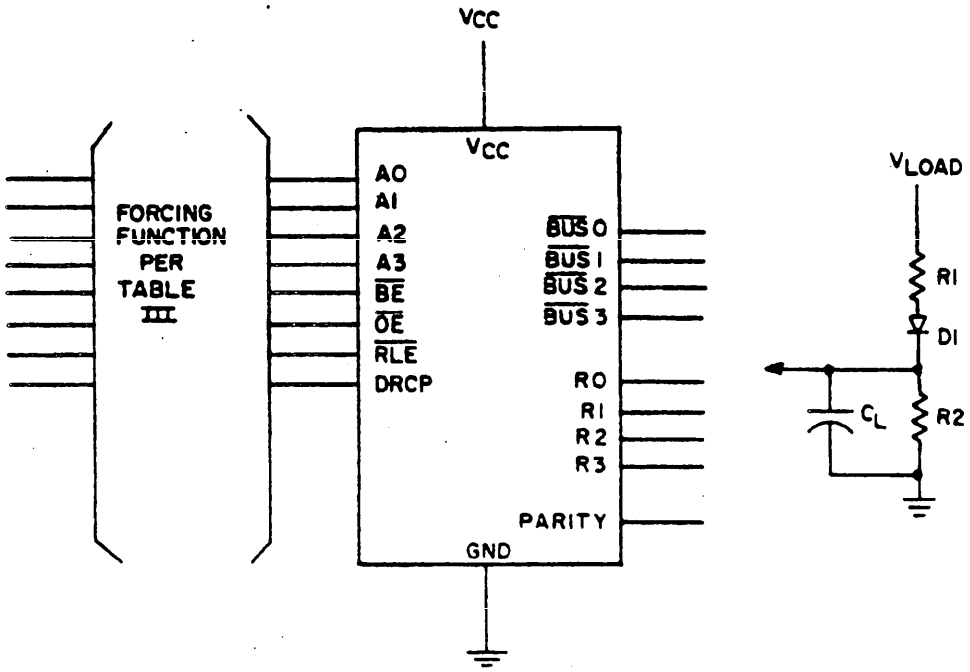

NOTES:
1. D_1 = 1N3064 or equivalent.
2. R_1 = 51Ω ±2%, type 03 "$\overline{\text{BUS}}$" outputs
   R_1 = 51Ω ±2%, type 06 "$\overline{\text{BUS}}$" outputs
   R_1 = 330Ω ±2%, "R" outputs
   R_1 = 340Ω ±2%, "Parity" output
3. R_2 = 120Ω ±2%, type 03 "$\overline{\text{BUS}}$" outputs
   R_2 = 120Ω ±2%, type 06 "BUS" outputs
   R_2 = 2.4 kΩ ±2%, "R" outputs
   R_2 = 3.83 kΩ ±1%, "Parity" output
4. V_{LOAD} = 5.0 V for type 03 $\overline{\text{BUS}}$ outputs
   V_{LOAD} = 2.5 V for types 03, 06 R_X and parity outputs and type 06 $\overline{\text{BUS}}$ outputs.

FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

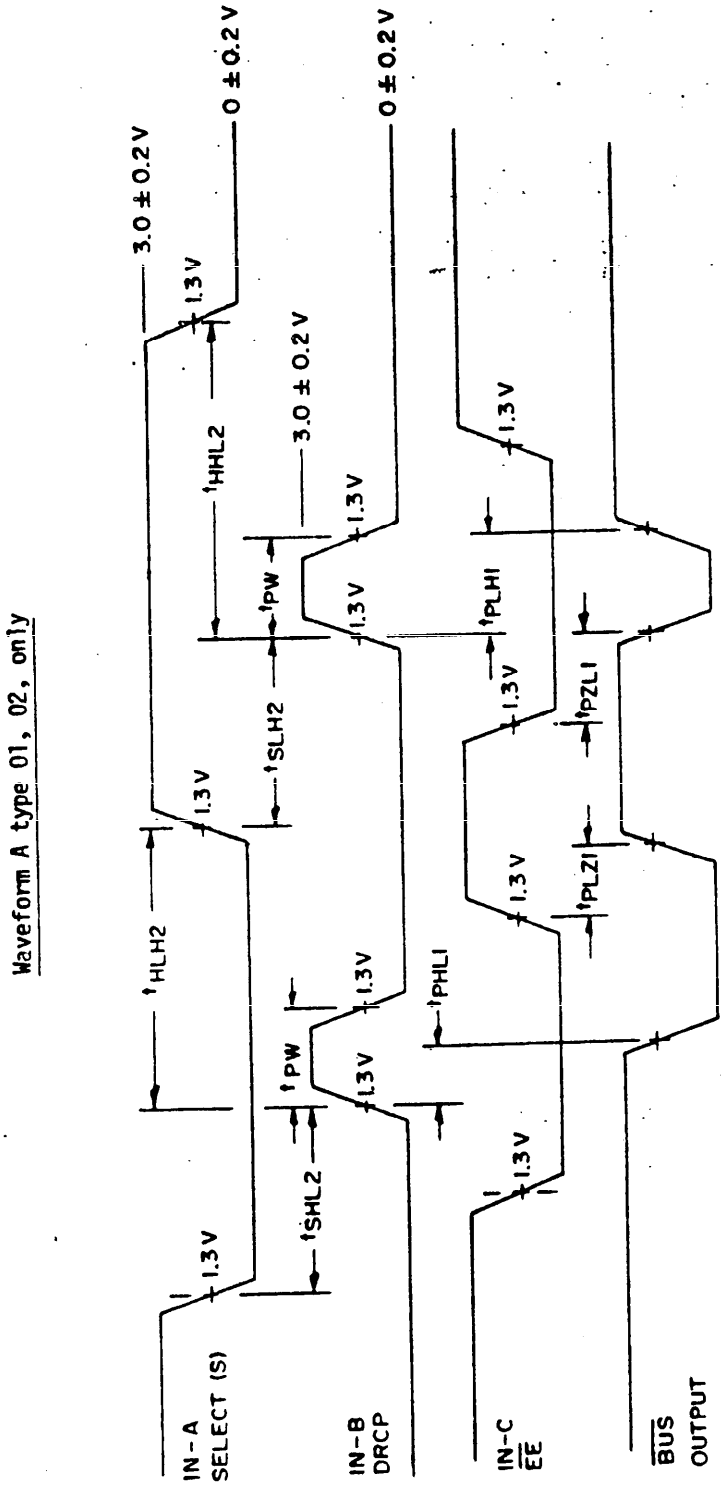


FIGURE 6. Switching waveforms - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.



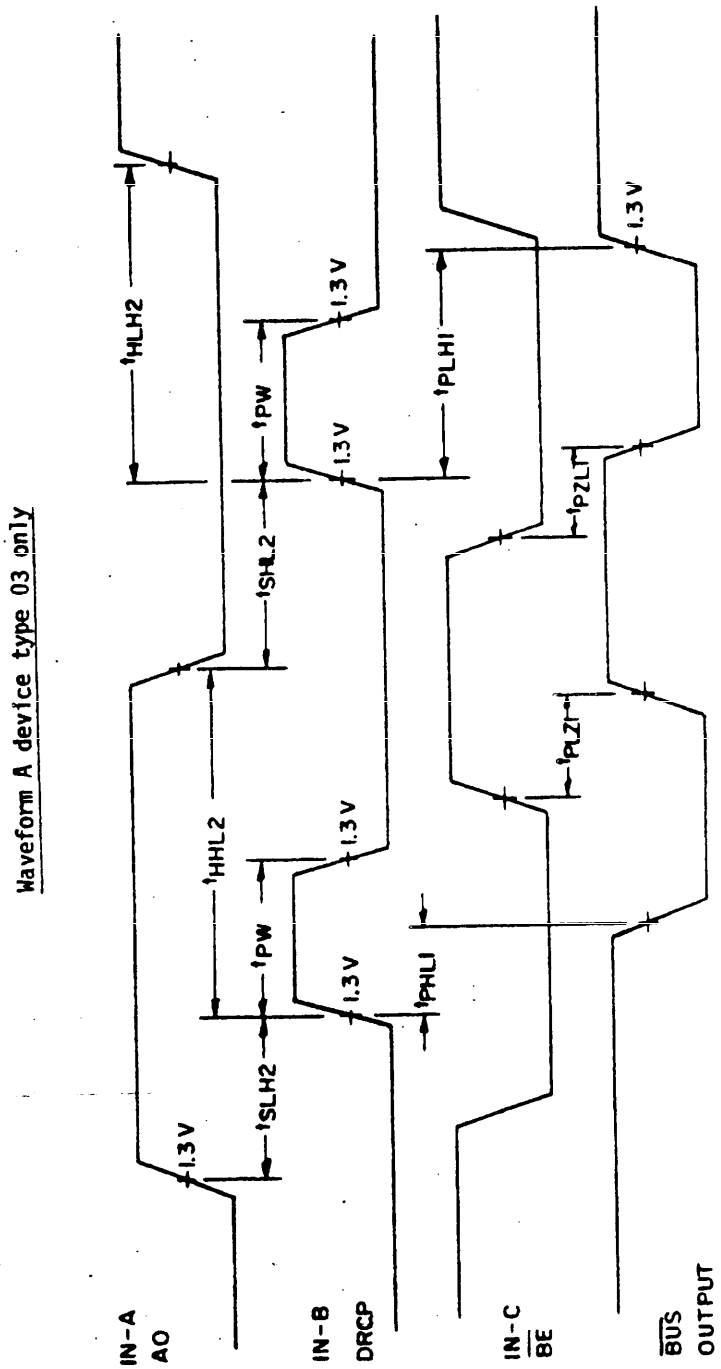


FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

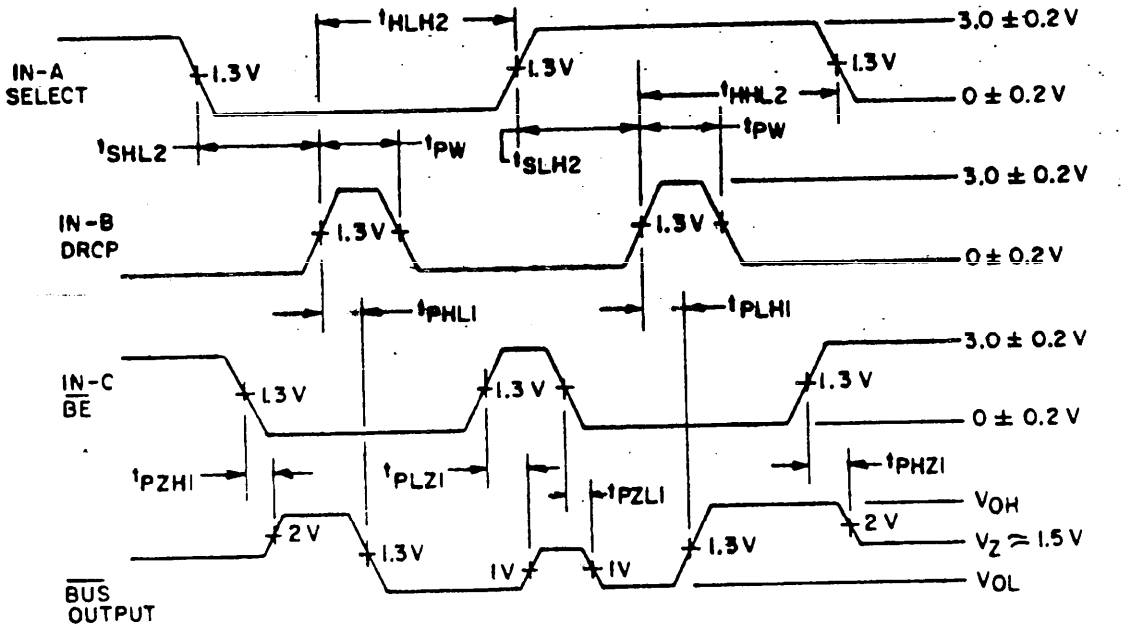

Waveform A Type 04, 05, only

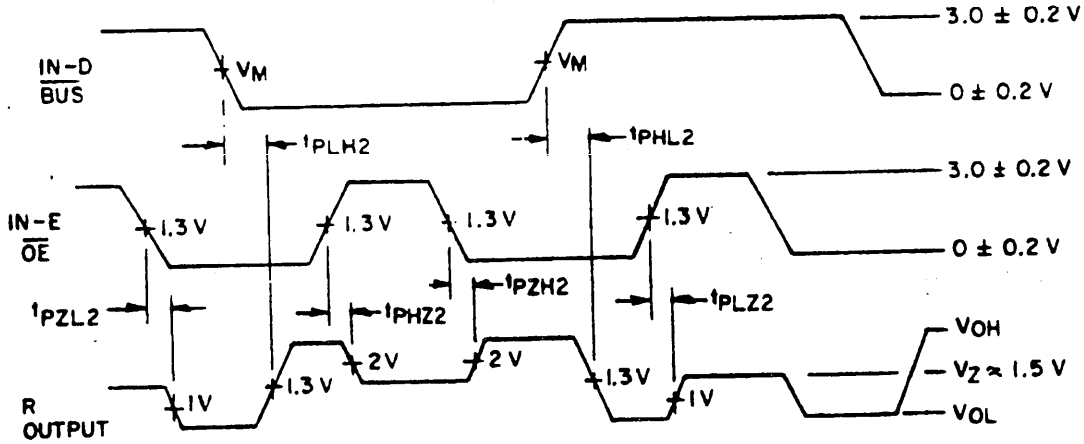


Waveform B

V_M = 2.0 V for type 01, 02, 03
V_M = 1.3 V for type 04, 05, 06

FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

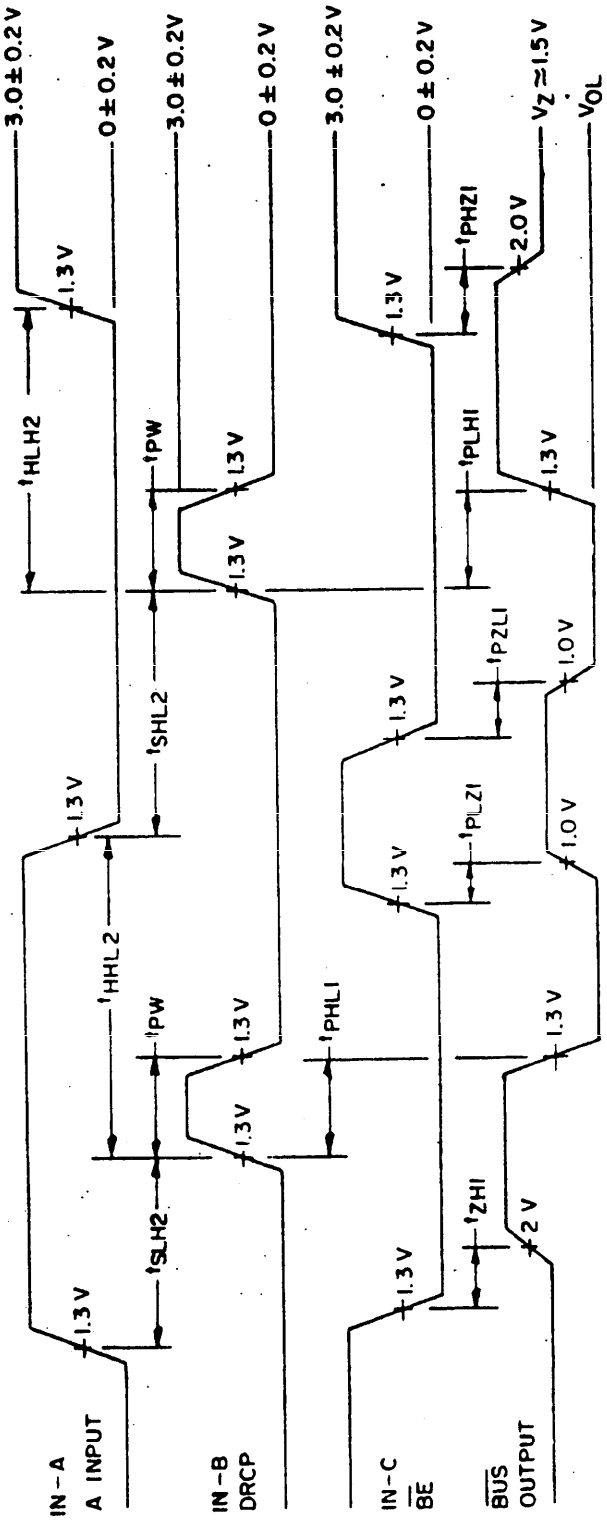

Waveform A type 06 only

FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:40Z
Check the source to verify that this is the current version before use.



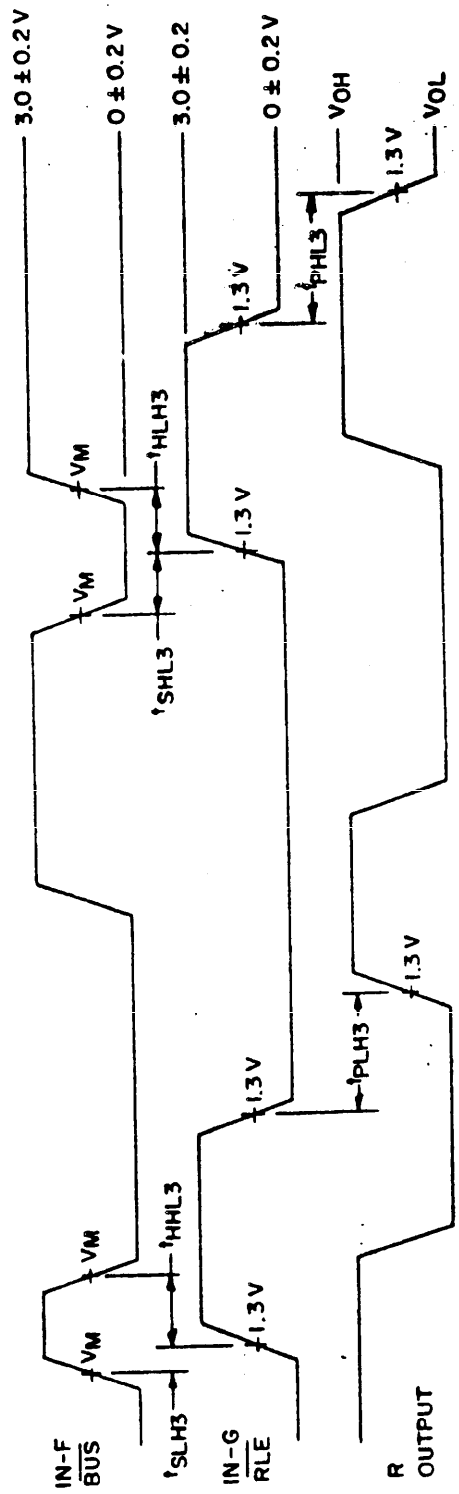


FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:40Z
Check the source to verify that this is the current version before use.

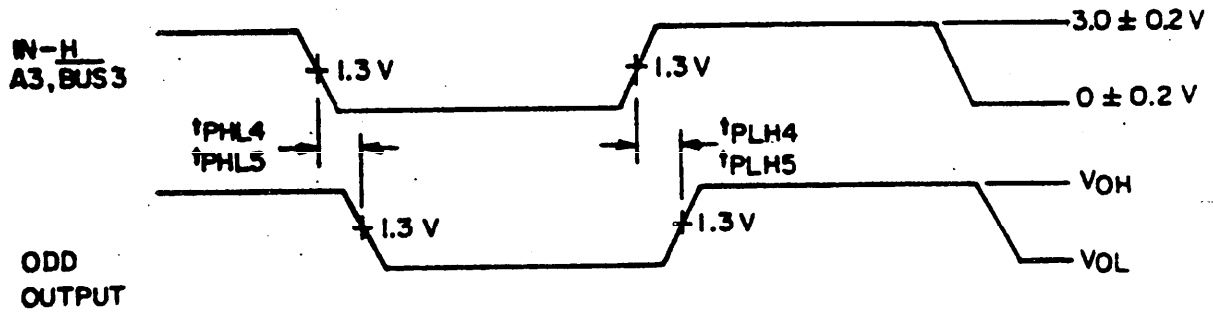

WAVEFORM D

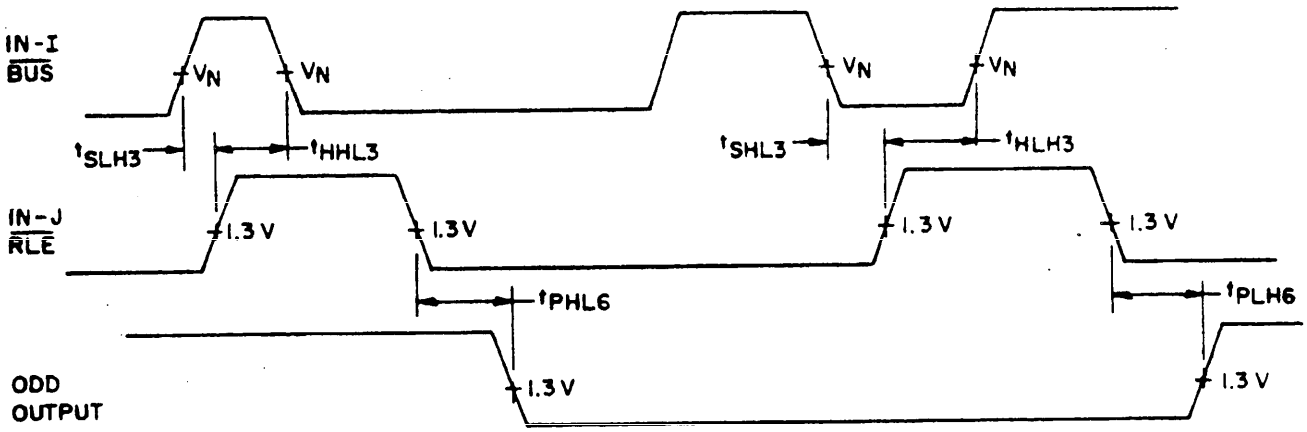

Waveform E

V_M = 2.0 V for type 01, 02, 03
V_M = 1.3 V for type 04, 05, 06

FIGURE 6. Switching waveforms - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04.

Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 WCE	2 R_0	3 B_0	4 A_0	5 BUS_0	6 GND	7 BUS_1	8 A_1	9 B_1	10 R_1	11 BE	12 DE	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Test limits Max	Unit
1 T_C = +25°C	V_{OH1} (04)	3006	1 2 3 4	GND	-1 mA		GND	-15 mA	GND	-15 mA	GND			GND					GND	-15 mA	GND				C	4.5 V	BUS_0 BUS_1 BUS_2 BUS_3	2.4		V
	V_{OH2} (01,04)		5 6 7 8	GND	-1 mA			GND		GND			-1 mA		GND		-1 mA		GND	GND				-1 mA			R_0 R_1 R_2 R_3			
	V_{OL1} (01)	3007	9 10 11 12				4.5 V	40 mA	GND	40 mA	4.5 V			GND				4.5 V	GND	40 mA	4.5 V				C	4.5 V	BUS_0 BUS_1 BUS_2 BUS_3		0.5	V
	V_{OL2} (04)		13 14 15 16				4.5 V	24 mA		24 mA	4.5 V							4.5 V		24 mA	4.5 V					4.5 V	BUS_0 BUS_1 BUS_2 BUS_3		0.4	V
	V_{OL3} (01)		17 18 19 20				4.5 V	70 mA		70 mA	4.5 V							4.5 V		70 mA	4.5 V					4.5 V	BUS_0 BUS_1 BUS_2 BUS_3		0.7	V
	V_{OL4} (04)		21 22 23 24				4.5 V	48 mA		48 mA	4.5 V							4.5 V		48 mA	4.5 V					4.5 V	BUS_0 BUS_1 BUS_2 BUS_3		0.5	V
	V_{OL5} (01)		25 26 27 28				4.5 V	100 mA		100 mA	4.5 V							4.5 V		100 mA	4.5 V					4.5 V	BUS_0 BUS_1 BUS_2 BUS_3		0.8	V
	V_{OL6} (01,04)		29 30 31 32		4 mA			4.5 V	GND	4.5 V			4 mA	4.5 V	GND		4 mA			4.5 V				4 mA			R_0 R_1 R_2 R_3		0.4	V

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
1 T_C = +25°C	V_{OL7} (01,04)	3007	33	GND	8 mA			4.5 V	GND	4.5 V			8 mA	4.5 V	GND					4.5 V	GND						4.5 V	R_0		0.45	V
			34																			4.5 V						R_1			
			35														8 mA											R_2			
			36																					8 mA				R_3			
	V_{OL8} (01,04)		37		12 mA			4.5 V		4.5 V			12 mA							4.5 V								R_0		0.5	
			38																									R_1			
			39														12 mA											R_2			
			40																			4.5 V			12 mA			R_3			
	I_{IL1} (01)	3009	41											0.4 V													5.5 V	$\overline{BE}$	-0.36		mA
			42	0.4 V																								$\overline{RLE}$	-0.36		
	I_{IL2} (04)		43											0.4 V														$\overline{BE}$	-0.72		
			44	0.4 V																								$\overline{RLE}$	-0.72		
	I_{IL3} (01,04)		45				0.4 V				0.4 V				GND				0.4 V									A_0	-0.36		
			46																									A_1			
			47																									A_2			
			48																				0.4 V					A_3			
			49			0.4 V									4.5 V													B_0			
			50								0.4 V								0.4 V									B_1			
			51																									B_2			
			52																				0.4 V					B_3			
			53												0.4 V													$\overline{OE}$			
			54													0.4 V												S			
			55																							0.4 V		DRCP			
	I_{IH1} (01,04)	3010	56				2.7 V				2.7 V				4.5 V				2.7 V									A_0		20	μA
			57																									A_1			
			58																									A_2			
			59																				2.7 V					A_3			
			60			2.7 V									GND													B_0			
			61									2.7 V																B_1			
			62															2.7 V										B_2			
			63																					2.7 V				B_3			
			64	2.7 V																								$\overline{RLE}$			
			65											2.7 V														$\overline{BE}$			
			66												2.7 V													$\overline{OE}$			
			67													2.7 V												S			
			68																							2.7 V		DRCP			

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21114:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Group	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	T4 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1/ +25°C	I_{IH2} (01,04)	3010	69				5.5 V		GND						4.5 V						GND					5.5 V	A_0		100	µA
			70								5.5 V								5.5 V								A_1			
			71																				5.5 V				A_2			
			72												GND												A_3			
			73			5.5 V						5.5 V																B_0			
			74															5.5 V									B_1			
			75																					5.5 V			B_2			
			76																								B_3			
			77	5.5 V																							$\overline{RLE}$			
			78											5.5 V													$\overline{BE}$			
			79												5.5 V	5.5 V											$\overline{OE}$			
			80																								S			
			81																								DRCP			
	I_{IL1} (low) (01,04)		82	GND	0.4 V			GND		GND			0.4 V	4.5 V	4.5 V					GND		GND						R_0		7/	
			83														0.4 V								0.4 V		R_1			
			84																								R_2			
			85																								R_3			
	I_{IL2} (low) (01)		86				GND	0.4 V			GND					GND			GND				GND		C		$\overline{BUS}_0$		-50	
			87							0.4 V										0.4 V		0.4 V					$\overline{BUS}_1$			
			88																								$\overline{BUS}_2$			
			89																								$\overline{BUS}_3$			
	I_{IL3} (low) (04)		90					0.4 V																			$\overline{BUS}_0$		-200	
			91							0.4 V										0.4 V		0.4 V					$\overline{BUS}_1$			
			92																								$\overline{BUS}_2$			
			93																								$\overline{BUS}_3$			
	I_{IH1} (low) (01,04)		94	GND	2.4 V			GND		GND			2.4 V		4.5 V		2.4 V			GND		GND			2.4 V		R_0		8/	
			95																								R_1			
			96																								R_2			
			97																								R_3			
	I_{IH2} (01)		98				GND	4.5 V		4.5 V	GND					GND			GND	4.5 V		4.5 V	GND		C		$\overline{BUS}_0$		200	
			99																								$\overline{BUS}_1$			
			100																								$\overline{BUS}_2$			
			101																								$\overline{BUS}_3$			

See footnotes at end of device types 01 and 04.

MIL-M-38510/401A

Source: https://assist.dla.mil - Downloaded: 2026-02-21T14:47:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{REF}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
1 T_C = +25°C	I_{ZH3} (low) (04)		102 103 104 105				GND	4.5 V	GND	4.5 V	GND			4.5 V		GND			GND	4.5 V	GND	4.5 V	GND			C	5.5 V	BUS_0 BUS_1 BUS_2 BUS_3		100	µA
	I_{ZH4} (low) (04)		106 107 108 109					2.4 V		2.4 V										2.4 V		2.4 V						BUS_0 BUS_1 BUS_2 BUS_3		50	
	I_{ZH5} (low) (01,04)		110 111 112 113					4.5 V		4.5 V										4.5 V		4.5 V					GND	BUS_0 BUS_1 BUS_2 BUS_3		100	
	I_{ZL1} (high) (01,04)		114 115 116 117	GND	0.4 V			4.5 V		4.5 V			0.4 V	4.5 V	4.5 V		0.4 V			4.5 V		4.5 V		0.4 V			5.5 V	R_0 R_1 R_2 R_3		1/	
	I_{ZL2} (high) (01)		118 119 120 121				4.5 V	0.4 V		0.4 V	4.5 V					GND			4.5 V	0.4 V		0.4 V	4.5 V			C		BUS_0 BUS_1 BUS_2 BUS_3		-50	
	I_{ZL3} (high) (04)		122 123 124 125					0.4 V		0.4 V										0.4 V		0.4 V						BUS_0 BUS_1 BUS_2 BUS_3		-200	
	I_{ZH1} (high) (01,04)		126 127 128 129	GND	2.4 V			4.5 V		4.5 V			2.4 V		4.5 V		2.4 V			4.5 V		4.5 V		2.4 V				R_0 R_1 R_2 R_3		8/	
	I_{ZH2} (high) (01)		130 131 132 133				4.5 V	4.5 V		4.5 V	4.5 V					GND			4.5 V	4.5 V		4.5 V	4.5 V			C		BUS_0 BUS_1 BUS_2 BUS_3		200	

See footnotes at end of device types 01 and 04.

MIL-M-38510/66A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{DE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{ZH3} (high) (04)		134 135 136 137				4.5 V	4.5 V	GND	4.5 V	4.5 V			4.5 V		GND			4.5 V	4.5 V	GND	4.5 V	4.5 V			C	5.5 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100	µA
	I_{ZH4} (high) (04)		138 139 140 141					2.4 V		2.4 V									2.4 V			2.4 V						$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		50	
	I_{ZH5} (high) (01,04)		142 143 144 145					4.5 V		4.5 V									4.5 V			4.5 V					GND	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100	
	I_{OS1} (04)	3011	146 147 148 149				GND	GND		GND	GND			GND					GND	GND		GND	GND				5.5 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	-50	-225	mA
	I_{OS2} (01)		150 151 152 153	GND	GND			GND		GND			GND	4.5 V	GND		GND			GND		GND		GND				R_0 R_1 R_2 R_3	-30	-130	
	I_{OS2} (04)		154 155 156 157		GND			GND		GND			GND				GND			GND		GND		GND				R_0 R_1 R_2 R_3		-85	
	I_{CC} (01)	3005	158			GND	GND				GND	GND		GND		GND		GND	GND				GND	GND		GND		V_{CC}		105	
	I_{CC} (04)		159			GND	GND				GND	GND		GND	GND	GND		GND	GND				GND	GND		GND	4.5 V	V_{CC}		95	
	V_{IC} (01)		160 161 162 163 164 165	-18 mA		-18 mA	-18 mA				-18 mA	-18 mA		-18 mA														$\overline{RE}$ B_0 A_0 A_1 B_1 $\overline{DE}$		-1.2	V

See footnotes at end of device types 01 and 04.

MIL-M-38510/9A

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{BE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
1 T_C = +25°C	V_{IC} (01)		166 167 168 169 170 171 172						GND						-18 mA	-18 mA		-18 mA	-18 mA		GND		-18 mA	-18 mA		-18 mA	4.5 V	$\overline{OE}$ S B_2 A_2 A_3 B_3 DRCP		-1.2	V
	V_{IC} (04)		173 174 175 176 177 178 179 180 181 182 183 184 185	-18 mA		-18 mA	-18 mA				-18 mA	-18 mA		-18 mA	-18 mA	-18 mA		-18 mA	-18 mA				-18 mA	-18 mA		-18 mA		REF B_0 A_0 A_1 B_1 $\overline{BE}$ $\overline{OE}$ S B_2 A_2 A_3 B_3 DRCP			
2	Same tests, terminal conditions and limits for subgroup 1 except T_C = +125°C and V_{IC} tests are omitted.																													
3	Same tests, terminal conditions and limits for subgroup 1 except T_C = -55°C and V_{IC} tests are omitted.																													
7 T_C = +25°C	FUNCTIONAL TESTS	3014	186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204* 205 206	B B B B B B B A A A A A A A B B B B B B B	X L L L L L L L L L L L L L L L L L L L W	A A A A A A A A A A A A A A A A A A A B	B B B A A A A A A A A A A A A A A A A A	X H H H H H H H Z Z H L L L L L L L L L	GND	X H H H H H H H Z Z H L L L L L L L L L	B B B A A A A A A A A A A A A A A A A A	A A A A A A A A A A A A A A A A A A A B	X L L L L L L L Z L L H H H H H Z H	B B B B B B B B B B B B B B B B B B B B	B B B B B B B B B B B B B B B B B B B B	B B B B B B B B B B B B B B B B B B B B	X L L L L L L L L L L L L L L L L L L L	A A A A A A A A A A A A A A A A A A A B	B B B A A A A A A A A A A A A A A A A A	X H H H H H H H Z Z H L L L L L L L L L	GND	X H H H H H H H Z Z H L L L L L L L L L	B B B A A A A A A A A A A A A A A A A A	A A A A A A A A A A A A A A A A A A A B	X L L L L L L L L L L L L L L L L L L L	B A A A B B B B B B B B A A A B B B B B	4.5 V	All outputs	$\frac{2/}{4/}$, $\frac{3/}{5/}$, $\frac{3/}{6/}$		

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
7 T_C = +25°C	FUNCTIONAL TESTS	3014	207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244	A A A A A A A A B B B B B B B B A A A A A A A A B B B B B B B B	H H Z H H H L L H H H L L L H H H L L L H H H L L L H H H Z Z H X H L	B B B B A A A A B B B B A A A A B B B B A A A A B B B B A A A A	A A A A B B B B A A A A B B B B A A A A B B B B A A A A B B B B	L Z Z L H H H H L L L L H H H H L L L L H H H H Z Z Z Z H H H H	GND	L Z Z L H H H H L L L L H H H H Z Z Z Z H H H H B* A* B*	A A A A B B B B A A A A B B B B A A A A B B B B A A A A B B B B	B B B B A A A A B B B B A A A A B B B B A A A A B B B B A A A A	H H Z H H H L L H H H L L L H H H Z Z Z H H H L L L H H H X H L H	B A B A B A B A B A B A B A B A B A B A B A B A B A B A B A B A	B B A A B B A A B B A A B B A A B B A A B B A A B B A A B B A A	A A A A B B B B A A A A B B B B A A A A B B B B A A A A B B B B	H H Z H H H L L H H H L L L H H H Z Z Z H H H L L L H H H X H L H	B B B B A A A A B B B B A A A A B B B B A A A A B B B B A A A A	A A A A B B B B A A A A B B B B A A A A B B B B A A A A B B B B	L Z Z L H H H H L L L L H H H H Z Z Z Z H H H L L L H H H Z Z H H	GND	L Z Z L H H H H L L L L H H H H Z Z Z Z H H H B* A* B*	A A A A B B B B A A A A B B B B A A A A B B B B A A A A B B B B	B B B B A A A A B B B B A A A A B B B B A A A A B B B B A A A A	H H Z H H H L L H H H L L L H H H Z Z Z H H H L L L H H H Z Z H H	B B B B A A A A B B B B A A A A B B B B A A A A B B B B A A A A	4.5 V	All outputs	$\frac{2}{4}$/ $\frac{2}{5}$/ $\frac{3}{6}$/ $\frac{3}{8}$/		
8	Repeat subgroup 7 at T_C = -55°C and T_C = +125°C																													
9 T_C = +25°C	t_{PHL1} (01)	3003	245 246 247 248			GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IR-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	3	31	ns
	t_{PHL1} (04)		249 250 251 252			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		29	

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{MR}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 T_C = +25°C	t_{PLH1} (01)	3003	253 254 255 256			GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	3	33	ns
	t_{PLH1} (04)		257 258 259 260			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		30	
	t_{PZL1} (01,04)		261 262 263 264			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		21	
	t_{PZH1} (04)		265 266 267 268			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PLZ1} (01)		269 270 271 272			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PLZ1} (04)		273 274 275 276			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		17	
	t_{PHZ1} (04)		277 278 279 280			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PHL2} (01)		281 282 283 284	GND	OUT			IN-D		IN-D			OUT	4.5 V	IN-E		OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		27	

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL} (max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 T_C = +25°C	t_{PHL2} (04)	3003	285	GND	OUT			IN-D	GND	IN-D			OUT	4.5 V	IN-E		OUT			IN-D	GND	IN-D			OUT		5.0 V	R_0	3	24	ns
			286																									R_1			
			287																									R_2			
			288																									R_3			
	t_{PLH2} (01)		289		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		27	
			290																									R_1			
			291																									R_2			
			292																									R_3			
	t_{PLH2} (04)		293		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0			
			294																									R_1			
			295																									R_2			
			296																									R_3			
	t_{PZL2} (01)		297		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		22	
			298																									R_1			
			299																									R_2			
			300																									R_3			
	t_{PZL2} (04)		301		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		21	
			302																									R_1			
			303																									R_2			
			304																									R_3			
	t_{PZH2} (01)		305		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		22	
			306																									R_1			
			307																									R_2			
			308																									R_3			
	t_{PZH2} (04)		309		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		21	
			310																									R_1			
			311																									R_2			
			312																									R_3			
	t_{PLZ2} (01)		313		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0		22	
			314																									R_1			
			315																									R_2			
			316																									R_3			

See footnotes at end of device types 01 and 04.

Source: https://assistdla.mil - Downloaded: 20260310-211114402
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
9 T_C = +25°C	t_{PLZ2} (04)	3003	317 318 319 320	GND	OUT			IN-D	GND	IN-D			OUT	4.5 V	IN-E		OUT			IN-D	GND	IN-D			OUT		5.0 V	R_0 R_1 R_2 R_3	3	21	ns
	t_{PHZ2} (01)		321 322 323 324		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		22	
	t_{PHZ2} (04)		325 326 327 328		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		21	
	t_{PHL3} (01)		329 330 331 332	IN-G	OUT			IN-F		IN-F			OUT		GND		OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		27	
	t_{PHL3} (04)		333 334 335 336		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		24	
	t_{PLH3} (01)		337 338 339 340		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		31	
	t_{PLH3} (04)		341 342 343 344		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		27	
10 T_C = +125°C	t_{PHL1} (01)		345 346 347 348			GND	4.5 V	OUT		OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT		OUT	4.5 V	GND		IN-B		$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		40	

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 RCE	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
10 T_A = +125°C	t_{PHL1} (04)	3003	349			GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT	GND					IN-B	5.0 V	$\overline{BUS}_0$	3	35	ns
			350																			OUT	4.5 V	GND				$\overline{BUS}_1$			
			351																									$\overline{BUS}_2$			
			352																									$\overline{BUS}_3$			
	t_{PLH1} (01)		353			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$		40	
			354																									$\overline{BUS}_1$			
			355																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			356																									$\overline{BUS}_3$			
	t_{PLH1} (04)		357			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$		36	
			358																									$\overline{BUS}_1$			
			359																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			360																									$\overline{BUS}_3$			
	t_{PZL1} (01,04)		361			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$		26	
			362																									$\overline{BUS}_1$			
			363																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			364																									$\overline{BUS}_3$			
	t_{PZH1} (04)		365			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$			
			366																									$\overline{BUS}_1$			
			367																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			368																									$\overline{BUS}_3$			
	t_{PLZ1} (01)		369			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$			
			370																									$\overline{BUS}_1$			
			371																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			372																									$\overline{BUS}_3$			
	t_{PLZ1} (04)		373			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$		21	
			374																									$\overline{BUS}_1$			
			375																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			376																									$\overline{BUS}_3$			
	t_{PHZ1} (04)		377			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT								$\overline{BUS}_0$			
			378																									$\overline{BUS}_1$			
			379																			OUT	4.5 V	GND				$\overline{BUS}_2$			
			380																									$\overline{BUS}_3$			

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 $\overline{OE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Mecs. terminal	Test limits Min	Max	Unit
10 T_C = +125°C	t_{PHL2} (01)	3003	381 382 383 384	GND	OUT			IN-D	GND	IN-D			OUT	4.5 V	IN-E		OUT			IN-D	GND	IN-D			OUT		5.0 V	R_0 R_1 R_2 R_3	3	37	ns
	t_{PHL2} (04)		385 386 387 388		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		30	
	t_{PLH2} (01)		389 390 391 392		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		37	
	t_{PLH2} (04)		393 394 395 396		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		33	
	t_{PZL2} (01)		397 398 399 400		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		28	
	t_{PZL2} (04)		401 402 403 404		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		26	
	t_{PZH2} (01)		405 406 407 408		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		28	
	t_{PZH2} (04)		409 410 411 412		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		26	

See footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 and 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL} (max); or open)

Group	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RCE}$	2 R_0	3 B_0	4 A_0	5 BUS_0	6 GND	7 BUS_1	8 A_1	9 B_1	10 R_1	11 $\overline{RE}$	12 $\overline{CE}$	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DMCP	24 V_{CC}	Meas. terminal	Test Limits Min.	Test Limits Max.	Unit ns
1/ T_C = +125°C	t_{PLZ2} (01)	3003	413	GND	OUT			IN-D	GND	IN-D			OUT	4.5 V	IN-E		OUT			IN-D	GND	IN-D			OUT		5.0 V	R_0 R_1 R_2 R_3	3	28	
	t_{PLZ2} (04)		417		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		26	
			418																											
			419																											
			420																											
	t_{PHZ2} (01)		421		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		28	
			422																											
			423																											
			424																											
	t_{PHZ2} (04)		425		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		26	
			426																											
			427																											
			428																											
	t_{PHZ3} (01)		429		OUT			IN-F		IN-F			OUT		GND		OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		37	
			430																											
			431																											
			432																											
	t_{PHZ3} (04)		433		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		30	
			434																											
			435																											
			436																											
	t_{PLH3} (01)		437		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		37	
			438																											
			439																											
			440																											
	t_{PLH3} (04)		441		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		33	
			442																											
			443																											
			444																											


1/ Same tests, terminal conditions and units as for subgroup 9, except T_C = -55°C.

Footnotes at end of device types 01 and 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

This amendment forms a part of MIL-M-38510/441A dated 7

NOTES:

1. C = 

2. Input voltages are: A = 2.4 V; B = 0.4 V except * where A = 2.8 V; B = 1.1 V for device type 01 only.

3. The measurement terminal is all outputs. Output voltages shall be either:
   H = 2.4 V minimum and L = 0.4 V maximum when using a high speed checker double comparator; or
   H $\geq$ 1.5 V and L $\leq$ 1.5 V when using a high speed checker single comparator.

4. X = Don't care.

5. Z = High impedance - The maximum current into or out of the disabled outputs shall be as shown:

Device type	01		04	
V_{out}	0.4 V	2.4 V	0.4 V	2.4 V
R3 - R0	±20 µA	±20 µA	±20 µA	±20 µA
B3 - B0	-50 µA	200 µA	-200 µA	50 µA

6. Test numbers 186 through 244 shall be run in sequence.

7. Maximum limits for device types are 01 = -20, 04 = -50.

8. Maximum limits for device types are 01 = 20, 04 = 50.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05.
Terminal conditions (pins not designated may be high ≥ 7.0 V; or low ≤ V_{IL}(max); or open)

Symbol	MIL-STD-883 method	Pin Test No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Meas. terminal	Test limits Min	Max	Unit
		1	RCE	R_0	B_0	A_0	$\overline{BUS}_0$	GND	$\overline{BUS}_1$	A_1	B_1	R_1	$\overline{BE}$	ODD	S	R_2	B_2	A_2	BUS_2	GND	BUS_3	A_3	B_3	R_3	DRCP	V_{CC}	$\overline{BUS}_0$	2.4		V
		2																									$\overline{BUS}_1$			
		3																									$\overline{BUS}_2$			
V_{OH1} (05)	3006	4				GND	-15 mA	GND	-15 mA	GND			GND		GND			GND	-15 mA		-15 mA	GND			C	4.5 V	$\overline{BUS}_3$			
		5	GND	-1 mA			GND						4.5 V														R_0			
		6							GND			-1 mA															R_1			
V_{OH2} (02,05)		7								-1 mA						-1 mA			GND		GND			-1 mA			R_2			
		8																									R_3			
V_{OH3} (02,05)		9				GND				GND			GND	-660 uA	GND			GND				4.5 V					ODD	2.5		
		10																							C		$\overline{BUS}_0$		0.5	
V_{OL1} (02)	3007	11				4.5 V	40 mA		40 mA	4.5 V								4.5 V	40 mA		40 mA	4.5 V					$\overline{BUS}_1$			
		12																									$\overline{BUS}_2$			
		13																									$\overline{BUS}_3$			
		14																									$\overline{BUS}_0$		0.4	
V_{OL2} (05)		15				4.5 V	24 mA		24 mA	4.5 V								4.5 V	24 mA		24 mA	4.5 V					$\overline{BUS}_1$			
		16																									$\overline{BUS}_2$			
		17																									$\overline{BUS}_3$			
		18																									$\overline{BUS}_0$		0.7	
V_{OL3} (02)		19				4.5 V	70 mA		70 mA	4.5 V								4.5 V	70 mA		70 mA	4.5 V					$\overline{BUS}_1$			
		20																									$\overline{BUS}_2$			
		21																									$\overline{BUS}_3$			
		22																									$\overline{BUS}_0$		0.5	
V_{OL4} (05)		23				4.5 V	48 mA		48 mA	4.5 V								4.5 V	48 mA		48 mA	4.5 V					$\overline{BUS}_1$			
		24																									$\overline{BUS}_2$			
		25																									$\overline{BUS}_3$			
		26																									$\overline{BUS}_0$		0.8	
V_{OL5} (02)		27				4.5 V	100 mA		100 mA	4.5 V								4.5 V	100 mA		100 mA	4.5 V					$\overline{BUS}_1$			
		28																									$\overline{BUS}_2$			
		29																									$\overline{BUS}_3$			
		30	GND	4 mA			4.5 V		4.5 V			4 mA	4.5 V			4 mA			4.5 V		4.5 V			4 mA			R_0		0.4	
V_{OL6} (02,05)		31																									R_1			
		32																									R_2			
		33																									R_3			
		34				GND				GND			GND	4 mA				GND				GND					ODD			

or limits at end of device types 02 and 05.

MIL-M-38510/9414A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 ODD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min.	Max	Unit
1 T_C = +25°C	V_{OL7} (02,05)	3007	35 36 37 38 39	GND	8 mA		GND	4.5 V	GND	4.5 V	GND		8 mA	4.5 V GND	4 mA		8 mA		GND	4.5 V		4.5 V	GND		8 mA		4.5 V	R_0 R_1 R_2 R_3 ODD		0.45	V
	V_{OL8} (02,05)		40 41 42 43 44		12 mA		GND	4.5 V		4.5 V	GND		12 mA	4.5 V GND	4 mA		12 mA		GND	4.5 V		4.5 V	GND		12 mA			R_0 R_1 R_2 R_3 ODD		0.5	
	I_{IL1} (02)	3009	45 46	0.4 V										0.4 V												5.5 V	$\overline{BE}$ $\overline{RLE}$	-0.36 -0.36		mA
	I_{IL2} (05)		47 48	0.4 V										0.4 V													$\overline{BE}$ $\overline{RLE}$	-0.72 -0.72		
	I_{IL3} (02,05)		49 50 51 52 53 54 55 56 57 58			0.4 V	0.4 V				0.4 V	0.4 V				GND 4.5 V 0.4 V		0.4 V	0.4 V			0.4 V	0.4 V		0.4 V		A_0 A_1 A_2 A_3 B_0 B_1 B_2 B_3 S DRCP	-0.36		
	I_{IH1} (02,05)	3010	59 60 61 62 63 64 65 66 67 68 69 70	2.7 V		2.7 V	2.7 V				2.7 V	2.7 V		2.7 V		4.5 V GND 2.7 V		2.7 V	2.7 V			2.7 V	2.7 V		2.7 V		A_0 A_1 A_2 A_3 B_0 B_1 B_2 B_3 $\overline{RLE}$ $\overline{BE}$ S DRCP		20	μA

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 OOO	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
1 T_C = +25°C	I_{IH2} (02,05)	3010	71				5.5 V		GND		5.5 V					4.5 V			5.5 V		GND					5.5 V	A_0		100	µA
			72																			5.5 V					A_1			
			73																								A_2			
			74													GND											A_3			
			75			5.5 V																					B_0			
			76									5.5 V						5.5 V									B_1			
			77																				5.5 V				B_2			
			78																								B_3			
			79	5.5 V																							$\overline{RLE}$			
			80											5.5 V													$\overline{BE}$			
			81													5.5 V											S			
			82																						5.5 V		DRCP			
	I_{IL2} (low) (02)		83				GND	0.4 V		0.4 V	GND			4.5 V						0.4 V			GND				$\overline{BUS}_0$		-90	
			84																						C		$\overline{BUS}_1$			
			85																								$\overline{BUS}_2$			
			86																			0.4 V					$\overline{BUS}_3$			
	I_{IL3} (low) (05)		87					0.4 V		0.4 V										0.4 V							$\overline{BUS}_0$		-200	
			88																								$\overline{BUS}_1$			
			89																								$\overline{BUS}_2$			
			90																			0.4 V					$\overline{BUS}_3$			
	I_{IH2} (low) (02)		91					4.5 V		4.5 V										4.5 V							$\overline{BUS}_0$		200	
			92																								$\overline{BUS}_1$			
			93																								$\overline{BUS}_2$			
			94																			4.5 V					$\overline{BUS}_3$			
	I_{IH3} (low) (05)		95					4.5 V		4.5 V										4.5 V							$\overline{BUS}_0$		100	
			96																								$\overline{BUS}_1$			
			97																								$\overline{BUS}_2$			
			98																			4.5 V					$\overline{BUS}_3$			
	I_{IH4} (low) (05)		99					2.4 V		2.4 V										2.4 V							$\overline{BUS}_0$		50	
			100																								$\overline{BUS}_1$			
			101																								$\overline{BUS}_2$			
			102																			2.4 V					$\overline{BUS}_3$			

See footnotes at end of device types 02 and 05.

MIL-M-38510/401A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 OOD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{ZH5} (low) (05)		103				4.5 V	4.5 V	GND	4.5 V	4.5 V								4.5 V			4.5 V				C	GND	$\overline{BUS}_0$		100	µA
			104																									$\overline{BUS}_1$			
			105																									$\overline{BUS}_2$			
			106																									$\overline{BUS}_3$			
	I_{ZL2} (high) (02)		107					0.4 V		0.4 V				4.5 V					0.4 V			0.4 V				5.5 V	$\overline{BUS}_0$		-50	
			108																									$\overline{BUS}_1$			
			109																									$\overline{BUS}_2$			
			110																									$\overline{BUS}_3$			
	I_{ZL3} (high) (05)		111					0.4 V		0.4 V									0.4 V			0.4 V						$\overline{BUS}_0$		-200	
			112																									$\overline{BUS}_1$			
			113																									$\overline{BUS}_2$			
			114																									$\overline{BUS}_3$			
	I_{ZH2} (high) (02)		115					4.5 V		4.5 V									4.5 V			4.5 V						$\overline{BUS}_0$		200	
			116																									$\overline{BUS}_1$			
			117																									$\overline{BUS}_2$			
			118																									$\overline{BUS}_3$			
	I_{ZH3} (high) (05)		119					4.5 V		4.5 V									4.5 V			4.5 V						$\overline{BUS}_0$		100	
			120																									$\overline{BUS}_1$			
			121																									$\overline{BUS}_2$			
			122																									$\overline{BUS}_3$			
	I_{ZH4} (high) (05)		123					2.4 V		2.4 V									2.4 V			2.4 V						$\overline{BUS}_0$		50	
			124																									$\overline{BUS}_1$			
			125																									$\overline{BUS}_2$			
			126																									$\overline{BUS}_3$			
	I_{ZH5} (high) (02,05)		127					4.5 V		4.5 V									4.5 V			4.5 V				GND		$\overline{BUS}_0$		100	
			128																									$\overline{BUS}_1$			
			129																									$\overline{BUS}_2$			
			130																									$\overline{BUS}_3$			
	I_{OS1} (05)	3011	131				GND	GND		GND	GND			GND		GND			GND			GND					5.5 V	$\overline{BUS}_0$	-50	-225	mA
			132																									$\overline{BUS}_1$			
			133																									$\overline{BUS}_2$			
			134																									$\overline{BUS}_3$			

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{OS2} (02)	3011	135	GND	GND			GND	GND	GND			GND	4.5 V							GND						5.5 V	R_0	-30	-130	mA
			136														GND											R_1			
			137																									R_2			
			138																	GND		GND			GND			R_3			
	I_{OSJ}		139				GND				GND			GND	GND	GND			GND				4.5 V					000	-20	-100	
	I_{OS2} (05)		140		GND			GND		GND			GND	4.5 V														R_0	-30	-130	
			141														GND			GND								R_1			
			142																									R_2			
			143																									R_3			
	I_{OSJ}		144				GND				GND			GND	GND	GND			GND				4.5 V					000	-20	-100	
	I_{CC} (02)	3005	145			GND	GND				GND	GND		GND		GND		GND	GND				GND	GND		GND		V_{CC}		105	
	I_{CC} (05)	3005	146			GND	GND				GND	GND		GND		GND		GND	GND				GND	GND		GND		V_{CC}		110	
	V_{IC} (02,05)		147	-18 mA		-18 mA	-18 mA				-18 mA	-18 mA		-18 mA		-18 mA		-18 mA	-18 mA				-18 mA	-18 mA		-18 mA	4.5 V	$\overline{RLE}$		-1.2	V
			148																									B_0			
			149																									A_0			
			150																									A_1			
			151																									B_1			
			152																									$\overline{BE}$			
			153																									S			
			154																									B_2			
			155																									A_2			
			156																									A_3			
			157																									B_3			
			158																									DRCP			
2	Same tests, terminal conditions and limits for subgroup 1 except T_C = +125°C and V_{IC} tests are omitted.																														
3	Same tests, terminal conditions and limits for subgroup 1 except T_C = -55°C and V_{IC} tests are omitted.																														
7 T_C = +25°C	FUNCTIONAL TESTS	3014	159	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H	GND	H	L	B	L	B	4.5 V	All outputs	4/, 2/, 5/, 3/, 6/		
			160	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			161	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			162	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			163	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			164	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			165	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					
			166	B	L	A	A	B	H	L	B	A	L	B	L	B	L	A	B	H		H	L	B	L	B					

See notes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be H (≥ 2.0 V; or Low ≤ V_{IL} (max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 WCT	2 B_0	3 B_0	4 A_0	5 BUS_0	6 GND	7 BUS_1	8 A_1	9 B_1	10 B_1	11 DE	12 ODD	13 S	14 B_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 B_3	23 OMCP	24 V_{CC}	Meas. terminal	Test Limits Min	Test Limits Max	Test Limits Unit
T_C = +25°C	FUNCTIONAL TESTS	3014	167	A	B	A	A	Z	GND	Z	A	A	H	A	L	B	L	A	B	Z	GND	Z	A	A	L	A	4.5 V	All outputs	2/ 3/ 4/ 5/ 6/		
			168																												
			169																												
			170																												
			171																												
			172																												
			173																												
			174																												
			175																												
			176																												
			177																												
			178																												
			179																												
			180																												
			181																												
			182																												
			183																												
			184																												
			185																												
			186																												
			187																												
			188																												
			189																												
			190																												
			191																												
			192																												
			193																												
			194																												
			195																												
			196																												
			197																												
			198																												
			199																												
			200																												
			201																												
			202																												
			203																												
			204																												
			205																												
			206																												
			207																												
			208																												
			209																												
			210																												
			211																												
			212																												
			213																												
			214																												
			215																												
			216																												
			217																												
			218																												
			219																												
			220																												
			221																												
8	Repeat subgroup 7 at T_C = -55°C and T_C = +125°C																														

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:40Z
Check the source to verify that this is the currentversion before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{MR}$	2 R_0	3 B_0	4 A_0	5 BUS_0	6 GND	7 BUS_1	8 A_1	9 B_1	10 R_1	11 $\overline{DE}$	12 DDD	13 S	14 R_2	15 B_2	16 A_2	17 BUS_2	18 GND	19 BUS_3	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 C = +25°C	t_{PHL1} (02)	3003	222			GND	4.5 V	OUT	GND					IN-C		IN-A					GND				IN-B	5.0 V	BUS_0	3	13	ns
			223							OUT	4.5 V	GND						GND	4.5 V	OUT							BUS_1			
			224																									BUS_2			
			225																			OUT	4.5 V	GND				BUS_3			
	t_{PHL1} (05)		226			GND	4.5 V	OUT																				BUS_0		20	
			227							OUT	4.5 V	GND																BUS_1			
			228															GND	4.5 V	OUT								BUS_2			
			229																			OUT	4.5 V	GND				BUS_3			
	t_{PLH1} (02)		230			GND	4.5 V	OUT																				BUS_0		13	
			231							OUT	4.5 V	GND																BUS_1			
			232															GND	4.5 V	OUT								BUS_2			
			233																			OUT	4.5 V	GND				BUS_3			
	t_{PLH1} (05)		234			GND	4.5 V	OUT																				BUS_0		16	
			235							OUT	4.5 V	GND																BUS_1			
			236															GND	4.5 V	OUT								BUS_2			
			237																			OUT	4.5 V	GND				BUS_3			
	t_{PZL1} (02,05)		238			GND	4.5 V	OUT																				BUS_0		21	
			239							OUT	4.5 V	GND																BUS_1			
			240															GND	4.5 V	OUT								BUS_2			
			241																			OUT	4.5 V	GND				BUS_3			
	t_{PZH1} (05)		242			GND	4.5 V	OUT																				BUS_0			
			243							OUT	4.5 V	GND																BUS_1			
			244															GND	4.5 V	OUT								BUS_2			
			245																			OUT	4.5 V	GND				BUS_3			
	t_{PLZ1} (02)		246			GND	4.5 V	OUT																				BUS_0			
			247							OUT	4.5 V	GND																BUS_1			
			248															GND	4.5 V	OUT								BUS_2			
			249																			OUT	4.5 V	GND				BUS_3			
	t_{PLZ1} (05)		250			GND	4.5 V	OUT																				BUS_0		17	
			251							OUT	4.5 V	GND																BUS_1			
			252															GND	4.5 V	OUT								BUS_2			
			253																			OUT	4.5 V	GND				BUS_3			

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 ODD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
9 T_C = +25°C	t_{PHZ1} (05)	3003	254 255 256 257			GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	3	17	ns
	t_{PHL2} (02)		258 259 260 261	GND	OUT			IN-D		IN-D			OUT	4.5 V			OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		27	
	t_{PHL2} (05)		262 263 264 265		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		24	
	t_{PLH2} (02)		266 267 268 269		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		27	
	t_{PLH2} (05)		270 271 272 273		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3			
	t_{PHL3} (02)		274 275 276 277	IN-G	OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3			
	t_{PHL3} (05)		278 279 280 281		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		24	
	t_{PLH3} (02)		282 283 284 285		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		31	

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Group	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 OOD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 ORCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
4, 25°C	t_{PLH3} (05)	3003	286 287 288 289	IN-G	OUT			IN-F	GND	IN-F			OUT	4.5 V			OUT			IN-F	GND	IN-F			OUT		5.0 V	R_0 R_1 R_2 R_3	3	27	ns
	t_{PHL4} (02) (05)		290 291				GND				GND				OUT	GND			GND			IN-H					OOD		32 32	
	t_{PLH4} (02) (05)		292 293																										32 34	
	t_{PHL5} (02) (05)		294 295					GND		GND				4.5 V						GND		IN-H							28 30	
	t_{PLH5} (02) (05)		296 297																										30 30	
	t_{PHL6} (02) (05)		298 299	IN-J																		IN-I							32 30	
	t_{PLH6} (02) (05)		300 301																										32 30	
5, 125°C	t_{PHL1} (02)		302 303 304 305			GND	4.5 V	OUT		OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT		OUT	4.5 V	GND		IN-B		BUS_0 BUS_1 BUS_2 BUS_3		40	
	t_{PHL7} (05)		306 307 308 309			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3		36	
	t_{PLH7} (02)		310 311 312 313			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3		40	

: Footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil - Downloaded: 2026-01-21 12:14:02
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{MR}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{SE}$	12 OOD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
10 T_C = +125°C	t_{PLH1} (05)	3003	314 315 316 317			GND	4.5 V	OUT	GND	OUT	4.5 V	GND		IN-C		IN-A		GND	4.5 V	OUT		OUT	4.5 V	GND		IN-B	5.0 V	BUS_0 BUS_1 BUS_2 BUS_3		36	ns
	t_{PZL1} (02,05)		318 319 320 321			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3		26	
	t_{PZH1} (05)		322 323 324 325			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3			
	t_{PLZ1} (02)		326 327 328 329			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3			
	t_{PLZ1} (05)		330 331 332 333			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3		21	
	t_{PHZ1} (05)		334 335 336 337			GND	4.5 V	OUT		OUT	4.5 V	GND						GND	4.5 V	OUT		OUT	4.5 V	GND				BUS_0 BUS_1 BUS_2 BUS_3			
	t_{PHL2} (02)		338 339 340 341	GND	OUT			IN-D		IN-D			OUT	4.5 V			OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		37	
	t_{PHL2} (05)		342 343 344 345		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		30	

See footnotes at end of device types 02 and 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL} (max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{DE}$	12 DDD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 DRCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
10 T_C = +125°C	t_{PLH2} (02)	3003	346 347 348 349	GND	OUT			IN-D	GND	IN-D			OUT	4.5 V			OUT			IN-D	GND	IN-D			OUT		5.0 V	R_0 R_1 R_2 R_3		37	ns
	t_{PLH2} (05)		350 351 352 353		OUT			IN-D		IN-D			OUT				OUT			IN-D		IN-D			OUT			R_0 R_1 R_2 R_3		33	
	t_{PHL3} (02)		354 355 356 357	IN-B	OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		37	
	t_{PHL3} (05)		358 359 360 361		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		30	
	t_{PLH3} (02)		362 363 364 365		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		37	
	t_{PLH3} (05)		366 367 368 369		OUT			IN-F		IN-F			OUT				OUT			IN-F		IN-F			OUT			R_0 R_1 R_2 R_3		33	
	t_{PHL4} (02) (05)		370 371				GND				GND				OUT	GND			GND			IN-H						GND		48 48	
	t_{PLH4} (02) (05)		372 373																											48 48	
	t_{PHL5} (02) (05)		374 375					GND GND		GND GND				4.5 V 4.5 V						GND GND		IN-H IN-H								48 36	

See footnotes at end of device types 02 and 05.

Source: https://assistdla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 02 and 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{MLE}$	2 R_0	3 B_0	4 A_0	5 $\overline{BUS}_0$	6 GND	7 $\overline{BUS}_1$	8 A_1	9 B_1	10 R_1	11 $\overline{BE}$	12 ODD	13 S	14 R_2	15 B_2	16 A_2	17 $\overline{BUS}_2$	18 GND	19 $\overline{BUS}_3$	20 A_3	21 B_3	22 R_3	23 ORCP	24 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
10 T_C = +125°C	t_{PLH5} (02) (05)	3003	376 377					GND	GND	GND				4.5 V	OUT					GND	GND	IN-H IN-H					5.0 V	ODD		40 36	ns
	t_{PHL6} (02) (05)		378 379	IN-J																		IN-I								40 36	
	t_{PLH6} (02) (05)		380 381																											40 36	
11	Same tests, terminal conditions and units as for subgroup 9, except T_C = -55°C.																													

NOTES:

1. C = 3.0 V ±0.2 V / 0 V ±0.2 V
2. Input voltages are: A = 2.4 V; B = 0.4 V except where A = 2.8 V; B = 1.1 V for device type 02 only.
3. The measurement terminal is all outputs. Output voltages shall be either:
   H = 2.4 V minimum and L = 0.4 V maximum when using a high speed checker double comparator; or
   H ≥ 1.5 V and L ≤ 1.5 V when using a high speed checker single comparator.
4. X = Don't care.
5. Z = High impedance - The maximum current into or out of the disabled outputs shall be as shown:

Device type	02		05	
V_{out}	0.4 V	2.4 V	0.4 V	2.4 V
$B_1 - B_0$	-50 µA	200 µA	-200 µA	100 µA

6. Test numbers 159 through 221 shall be run in sequence.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 RCE	2 R_0	3 A_0	4 BUS_0	5 GND	6 BUS_1	7 A_1	8 R_1	9 $\overline{SE}$	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 BUS_2	15 GND	16 BUS_3	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	V_{OH1} (06)	3006	1			GND	-15 mA	GND	-15 mA	GND		4.5 V		GND		GND	-15 mA	GND	-15 mA	GND		C	4.5 V	BUS_0 BUS_1 BUS_2 BUS_3	2.4		V
	V_{OH2} (03,06)		2 3 4	GND	-1 mA		GND		GND		-1 mA	GND			-1 mA		GND		GND	4.5 V	-1 mA			R_0 R_1 R_2 R_3			
	V_{OH3} (03,06)		9			GND				GND		GND	-660 mA			GND				4.5 V				ODD	2.5		
	V_{OL1} (03)	3007	10 11 12 13			4.5 V	40 mA		40 mA	4.5 V						4.5 V	40 mA		40 mA	4.5 V				BUS_0 BUS_1 BUS_2 BUS_3		0.5	
	V_{OL2} (06)		14 15 16 17			4.5 V	24 mA		24 mA	4.5 V						4.5 V	24 mA		24 mA	4.5 V				BUS_0 BUS_1 BUS_2 BUS_3		0.4	
	V_{OL3} (03)		18 19 20 21			4.5 V	70 mA		70 mA	4.5 V						4.5 V	70 mA		70 mA	4.5 V				BUS_0 BUS_1 BUS_2 BUS_3		0.7	
	V_{OL4} (06)		22 23 24 25			4.5 V	48 mA		48 mA	4.5 V						4.5 V	48 mA		48 mA	4.5 V				BUS_0 BUS_1 BUS_2 BUS_3		0.5	
	V_{OL5} (03)		26 27 28 29			4.5 V	100 mA		100 mA	4.5 V						4.5 V	100 mA		100 mA	4.5 V				BUS_0 BUS_1 BUS_2 BUS_3		0.8	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2022-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 B_1	9 $\overline{BE}$	10 DDD	11 $\overline{DE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	V_{OL6} (03,06)	3007	30 31 32 33 34	GND	4 mA	GND		GND	4.5 V	GND	4 mA	4.5 V GND	4 mA	GND	4 mA	GND	4.5 V	GND	4.5 V	GND	4 mA		4.5 V	R_0 R_1 R_2 R_3 DDD		0.4	V
	V_{OL7} (03,06)		35 36 37 38 39		8 mA	GND			4.5 V	GND	8 mA	4.5 V GND	8 mA		8 mA	GND	4.5 V		4.5 V	GND	8 mA			R_0 R_1 R_2 R_3 DDD		0.45	
	V_{OL8} (03,06)		40 41 42 43 44		12 mA	GND			4.5 V	GND	12 mA	4.5 V GND	12 mA		12 mA	GND	4.5 V		4.5 V	GND	12 mA			R_0 R_1 R_2 R_3 DDD		0.5	
	I_{IL1} (03)	3009	45 46	0.4 V								0.4 V											5.5 V	$\overline{BE}$ $\overline{RLE}$		-0.36 -0.36	mA
	I_{IL2} (06)		47 48	0.4 V								0.4 V												$\overline{BE}$ $\overline{RLE}$		-0.72 -0.72	
	I_{IL3} (03,06)		49 50 51 52 53 54 55 56	0.4 V		0.4 V				0.4 V		0.4 V		0.4 V		0.4 V				0.4 V		0.4 V		A_0 A_1 A_2 A_3 $\overline{RLE}$ $\overline{BE}$ $\overline{DE}$ DRCP		-0.36	
	I_{IH1} (03,06)	3010	57 58 59 60 61 62 63 64	2.7 V		2.7 V				2.7 V		2.7 V		2.7 V		2.7 V				2.7 V		2.7 V		A_0 A_1 A_2 A_3 $\overline{RLE}$ $\overline{BE}$ $\overline{DE}$ DRCP		20	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{IH2} (03,06)	3010	65 66 67 68 69 70 71 72	5.5 V		5.5 V		GND		5.5 V		5.5 V		5.5 V		5.5 V		GND		5.5 V		5.5 V	5.5 V	A_0 A_1 A_2 A_3 $\overline{RLE}$ $\overline{BE}$ $\overline{OE}$ DRCP		100	mA
	I_{IL1} (low) (03,06)		73 74 75 76	GND	0.4 V		GND		GND		0.4 V	4.5 V		4.5 V	0.4 V		GND		GND		0.4 V			R_0 R_1 R_2 R_3		-20	μA
	I_{IH1} (low) (03,06)		77 78 79 80		2.4 V						2.4 V				2.4 V						2.4 V			R_0 R_1 R_2 R_3		20	
	I_{IL2} (low) (03)		81 82 83 84			GND	0.4 V		0.4 V	GND						GND	0.4 V	0.4 V	GND		C		$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		-50	
	I_{IL3} (low) (06)		85 86 87 88				0.4 V		0.4 V								0.4 V		0.4 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		-200	
	I_{IH2} (low) (03)		89 90 91 92				4.5 V		4.5 V								4.5 V		4.5 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		200	mA
	I_{IH3} (low) (06)		93 94 95 96				4.5 V		4.5 V								4.5 V		4.5 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 OE	12 R_2	13 A_2	14 BUS_2	15 GND	16 BUS_3	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{ZH4} (low) (06)		97 98 99 100			GND	2.4 V	GND	2.4 V	GND		4.5 V				GND	2.4 V	GND	2.4 V	GND		C	5.5 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		50	mA
	I_{ZH5} (low) (03,06)		101 102 103 104				4.5 V		4.5 V								4.5 V		4.5 V				GND	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100		
	I_{ZL1} (high) (03,06)		105 106 107 108	GND	0.4 V		4.5 V		4.5 V		0.4 V	4.5 V		4.5 V	0.4 V		4.5 V		4.5 V		0.4 V		5.5 V	R_0 R_1 R_2 R_3		7/	μA	
	I_{ZH1} (high) (03,06)		109 110 111 112		2.4 V						2.4 V				2.4 V						2.4 V			R_0 R_1 R_2 R_3	See note 8	8/		
	I_{ZL2} (high) (03)		113 114 115 116			4.5 V	0.4 V		0.4 V	4.5 V						4.5 V	0.4 V		0.4 V	4.5 V		C		$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		-50		
	I_{ZL3} (high) (06)		117 118 119 120				0.4 V		0.4 V								0.4 V		0.4 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		-200		
	I_{ZH2} (high) (03)		121 122 123 124				4.5 V		4.5 V								4.5 V		4.5 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		200		
	I_{ZH3} (high) (06)		125 126 127 128				4.5 V		4.5 V								4.5 V		4.5 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100		

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Min Test No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	I_{ZH4} (high) (06)		129 130 131 132			4.5 V	2.4 V	GND	2.4 V	4.5 V		4.5 V				4.5 V	2.4 V	GND	2.4 V	4.5 V		C	5.5 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		50	µA
	I_{ZH5} (high) (03,06)		133 134 135 136				4.5 V		4.5 V								4.5 V		4.5 V					$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		100	
	I_{OS1} (06)	3011	137 138 139 140			GND	GND		GND	GND		GND				GND	GND		GND	GND				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	-50	-225	mA
	I_{OS2} (03)		141 142 143 144	GND	GND		GND		GND		GND	4.5 V		GND	GND		GND		GND		GND			R_0 R_1 R_2 R_3	-30	-130	
	I_{OS3} (03)		145			GND				GND		GND	GND			GND				4.5 V				OOO	-20	-100	
	I_{OS2} (06)		146 147 148 149		GND		GND		GND		GND	4.5 V			GND		GND		GND		GND			R_0 R_1 R_2 R_3	-30	-130	
	I_{OS3} (06)		150			GND				GND		GND	GND			GND				4.5 V				OOO	-20	-100	
	I_{CC} (03)	3005	151																	GND		GND		V_{CC}		110	
	I_{CC} (06)	3005	152																					V_{CC}		95	
	V_{IC} (03,06)		153 154 155 156 157	-18 mA		-18 mA				-18 mA		-18 mA		-18 mA									4.5 V	$\overline{RLE}$ A_0 A_1 $\overline{BE}$ $\overline{OE}$		-1.2	

See footnotes at end of device types 03 and 06.

MIL-M-38510/441A

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 RLE	2 R_0	3 A_0	4 BUS_0	5 GND	6 BUS_1	A_1	8 R_1	9 DRCP	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
1 T_C = +25°C	V_{IC} (03,06)		158 159 160					GND GND GND								-18 mA		GND GND GND		-18 mA		-18 mA	4.5 V 4.5 V 4.5 V	A_2 A_3 DRCP		-1.2 -1.2 -1.2	V V V
2	Same tests, terminal conditions and limits for subgroup 1 except T_C = +125°C and V_{IC} tests are omitted.																										
3	Same tests, terminal conditions and limits for subgroup 1 except T_C = -55°C and V_{IC} tests are omitted.																										
7 T_C = +25°C	FUNCTIONAL TESTS	3014	161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207	B B B B B B A A A B B B A A A B B B A A A B B B A A A B B B A A A B B B A A A B B B A A A B B	X L L L L H H H Z H H H H Z H H L L L L

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 OOD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
7 T_C = +25°C	FUNCTIONAL TESTS	3014	208 209 210 211 212	B B B B B	Z X H L H	A B B B B	L B* A* B*	GND	L B* A* B*	A B B B B	Z X H L H	B A A A A	L X L L L	A B B B B	Z X H L H	A B B B B	L B* A* B*	GND	L B* A* B*	A B B B B	Z X H L H	A B B B B	4.5 V	All outputs	2/, 3/, 4/, 5/, 6/		
8	Repeat subgroup 7 at T_C = -55°C and T_C = +125°C																										
9 T_C = +25°C	t_{PHL1} (03)	3003	213 214 215 216			IN-A	OUT	GND	OUT	IN-A		IN-C				IN-A	OUT	GND	OUT	IN-A		IN-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	3	31	ns
	t_{PHL1} (06)		217 218 219 220			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		29		
	t_{PLH1} (03)		221 222 223 224			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		33		
	t_{PLH1} (06)		225 226 227 228			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		30		
	t_{PZL1} (03,06)		229 230 231 232			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		21		
	t_{PZH1} (06)		233 234 235 236			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$				
	t_{PLZ1} (03)		237 238 239 240			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$				

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high > 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 CIDD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 T_C = +25°C	t_{PLZ1} (06)	3003	241 242 243 244			IN-A	OUT	GND	OUT	IN-A		IN-C				IN-A	OUT	GND	OUT	IN-A		IN-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$	3	17	ns
	t_{PHZ1} (06)		245 246 247 248			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PHL2} (03)		249 250 251 252	GND	OUT		IN-D		IN-D		OUT	4.5 V		IN-E	OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		27	
	t_{PHL2} (06)		253 254 255 256		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		24	
	t_{PLH2} (03)		257 258 259 260		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		27	
	t_{PLH2} (06)		261 262 263 264		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3			
	t_{PZL2} (03)		265 266 267 268		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		22	
	t_{PZL2} (06)		269 270 271 272		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		21	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 ORCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 T_C = +25°C	t_{PZH2} (03)	3003	273	GND	OUT		IN-D	GND				4.5 V		IN-E				GND					5.0 V	R_0	3	22	ns
			274						IN-D		OUT				OUT		IN-D							R_1			
			275																IN-D					R_2			
			276																		OUT			R_3			
	t_{PZH2} (06)		277		OUT		IN-D																	R_0		21	
			278						IN-D		OUT				OUT		IN-D							R_1			
			279																IN-D					R_2			
			280																		OUT			R_3			
	t_{PLZ2} (03)		281		OUT		IN-D																	R_0		22	
			282						IN-D		OUT				OUT		IN-D							R_1			
			283																IN-D					R_2			
			284																		OUT			R_3			
	t_{PLZ2} (06)		285		OUT		IN-D																	R_0		21	
			286						IN-D		OUT				OUT		IN-D							R_1			
			287																IN-D					R_2			
			288																		OUT			R_3			
	t_{PHZ2} (03)		289		OUT		IN-D																	R_0		22	
			290						IN-D		OUT				OUT		IN-D							R_1			
			291																IN-D					R_2			
			292																		OUT			R_3			
	t_{PHZ2} (06)		293		OUT		IN-D																	R_0		21	
			294						IN-D		OUT				OUT		IN-D							R_1			
			295																IN-D					R_2			
			296																		OUT			R_3			
	t_{PHL3} (03)		297	IN-G	OUT		IN-F							GND										R_0		27	
			298						IN-F		OUT				OUT		IN-F							R_1			
			299																IN-F					R_2			
			300																		OUT			R_3			
	t_{PHL3} (06)		301		OUT		IN-F																	R_0		24	
			302						IN-F		OUT				OUT		IN-F							R_1			
			303																IN-F					R_2			
			304																		OUT			R_3			

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Test limits Max	Test limits Unit
9 T_C = +25°C	t_{PLH3} (03)	3003	305	IN-G	OUT		IN-F	GND	IN-F		OUT	4.5 V		GND				GND					5.0 V	R_0	3	31	ns
			306																					R_1			
			307												OUT		IN-F							R_2			
			308																IN-F		OUT			R_3			
	t_{PLH3} (06)		309		OUT		IN-F		IN-F		OUT															27	
			310																					R_0			
			311												OUT		IN-F							R_1			
			312																IN-F		OUT			R_2			
																								R_3			
	t_{PHL4} (03) (06)		313			GND				GND			OUT			GND				IN-H				ODD		32	
			314																							32	
	t_{PLH4} (03) (06)		315																							32	
			316																							34	
	t_{PLH5} (03) (06)		317				GND		GND			4.5 V					GND		IN-H							30	
			318																							30	
	t_{PHL5} (03) (06)		319																							28	
			320																							30	
	t_{PHL6} (03) (06)		321	IN-J															IN-I							32	
			322																							30	
	t_{PLH6} (03) (06)		323																							32	
			324																							30	
10 T_C = +125°C	t_{PHL1} (03)		325			IN-A	OUT		OUT	IN-A		IN-C										IN-B		$\overline{BUS}_0$		40	
			326																					$\overline{BUS}_1$			
			327													IN-A	OUT							$\overline{BUS}_2$			
			328																OUT	IN-A				$\overline{BUS}_3$			
	t_{PHL1} (06)		329			IN-A	OUT		OUT	IN-A														$\overline{BUS}_0$		36	
			330																					$\overline{BUS}_1$			
			331													IN-A	OUT							$\overline{BUS}_2$			
			332																OUT	IN-A				$\overline{BUS}_3$			

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{MR}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{DE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
10 T_C = +125°C	t_{PLH1} (03)	3003	333 334 335 336			IN-A	OUT	GND	OUT	IN-A		IN-C				IN-A	OUT	GND	OUT	IN-A		IN-B	5.0 V	$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		40	ns
	t_{PLH1} (06)		337 338 339 340			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		36	
	t_{PZL1} (03,06)		341 342 343 344			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		26	
	t_{PZH1} (06)		345 346 347 348			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PLZ1} (03)		349 350 351 352			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PLZ1} (06)		353 354 355 356			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$		21	
	t_{PHZ1} (06)		357 358 359 360			IN-A	OUT		OUT	IN-A						IN-A	OUT		OUT	IN-A				$\overline{BUS}_0$ $\overline{BUS}_1$ $\overline{BUS}_2$ $\overline{BUS}_3$			
	t_{PHL2} (03)		361 362 363 364	GND	OUT		IN-D		IN-D		OUT	4.5 V		IN-E	OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		37	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 WLE	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{DE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
10 T_C = +125°C	t_{PHL2} (06)	3003	365	GND	OUT		IN-D	GND	IN-D		OUT	4.5 V		IN-E			IN-D	GND					5.0 V	R_0		30	ns
			366																					R_1			
			367												OUT									R_2			
			368														IN-D		IN-D		OUT			R_3			
	t_{PLH2} (03)		369		OUT		IN-D		IN-D		OUT													R_0		37	
			370																					R_1			
			371												OUT		IN-D							R_2			
			372																IN-D		OUT			R_3			
	t_{PLH2} (06)		373		OUT		IN-D		IN-D		OUT													R_0		33	
			374																					R_1			
			375												OUT		IN-D							R_2			
			376																IN-D		OUT			R_3			
	t_{PZL2} (03)		377		OUT		IN-D		IN-D		OUT													R_0		28	
			378																					R_1			
			379												OUT		IN-D							R_2			
			380																IN-D		OUT			R_3			
	t_{PZL2} (06)		381		OUT		IN-D		IN-D		OUT													R_0		26	
			382																					R_1			
			383												OUT		IN-D							R_2			
			384																IN-D		OUT			R_3			
	t_{PZH2} (03)		385		OUT		IN-D		IN-D		OUT													R_0		28	
			386																					R_1			
			387												OUT		IN-D							R_2			
			388																IN-D		OUT			R_3			
	t_{PZH2} (06)		389		OUT		IN-D		IN-D		OUT													R_0		26	
			390																					R_1			
			391												OUT		IN-D							R_2			
			392																IN-D		OUT			R_3			
	t_{PLZ2} (03)		393		OUT		IN-D		IN-D		OUT													R_0		28	
			394																					R_1			
			395												OUT		IN-D							R_2			
			396																IN-D		OUT			R_3			

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1 $\overline{RLE}$	2 R_0	3 A_0	4 $\overline{BUS}_0$	5 GND	6 $\overline{BUS}_1$	7 A_1	8 R_1	9 $\overline{BE}$	10 ODD	11 $\overline{OE}$	12 R_2	13 A_2	14 $\overline{BUS}_2$	15 GND	16 $\overline{BUS}_3$	17 A_3	18 R_3	19 DRCP	20 V_{CC}	Meas. terminal	Test Limits Min	Max	Unit
10 T_C = +125°C	t_{PLZ2} (06)	3003	397	GND	OUT		IN-D	GND	IN-D		OUT	4.5 V		IN-E	OUT		IN-D	GND	IN-D		OUT		5.0 V	R_0 R_1 R_2 R_3		26	ns
	t_{PHZ2} (03)		401		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		28	
	t_{PHZ2} (06)		405		OUT		IN-D		IN-D		OUT				OUT		IN-D		IN-D		OUT			R_0 R_1 R_2 R_3		26	
	t_{PHL3} (03)		409	IN-G	OUT		IN-F		IN-F		OUT			GND	OUT		IN-F		IN-F		OUT			R_0 R_1 R_2 R_3		37	
	t_{PHL3} (06)		413		OUT		IN-F		IN-F		OUT				OUT		IN-F		IN-F		OUT			R_0 R_1 R_2 R_3		30	
	t_{PLH3} (03)		417		OUT		IN-F		IN-F		OUT				OUT		IN-F		IN-F		OUT			R_0 R_1 R_2 R_3		37	
	t_{PLH3} (06)		421		OUT		IN-F		IN-F		OUT				OUT		IN-F		IN-F		OUT			R_0 R_1 R_2 R_3		33	
	t_{PHL4} (03) (06)		425			GND				GND			OUT			GND				IN-H				ODD		40	
	t_{PLH4} (03) (06)		427																							40	

See footnotes at end of device types 03 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 03 and 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; or low ≤ V_{IL}(max); or open)

Subgroup	Symbol	MIL-STD-883 method	Pin Test No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Meas. terminal	Test limits Min	Max	Unit
10 T_C = +125°C	t_{PLH5} (03) (06)	3003	429 430	NOE	R_0	A_0	$\overline{BUS}_0$	GND	$\overline{BUS}_1$	A_1	R_1	BE	OOD	OE	R_2	A_2	$\overline{BUS}_2$	GND	$\overline{BUS}_3$	A_3	R_3	DIR	V_{CC}	OOD		40 36	ns
	t_{PHL5} (03) (06)		431 432				GND	GND	GND			4.5 V	OUT				GND	GND	IN-H				5.0 V			40 36	
	t_{PHL6} (03) (06)		433 434	IN-J															IN-I							40 36	
	t_{PLH6} (03) (06)		435 436																							40 36	
11	Same tests, terminal conditions and units as for subgroup 9, except T_C = +125°C.																										

NOTES:

1. C = 3.0 V ±0.2 V / 0 V ±0.2 V

2. Input voltages are: A = 2.4 V; B = 0.4 V except * where A = 2.8 V; B = 1.1 V for device type 03 only.

3. The measurement terminal is all outputs. Output voltages shall be either:
   H = 2.4 V minimum and L = 0.4 V maximum when using a high speed checker double comparator; or
   H ≥ 1.5 V and L ≤ 1.5 V when using a high speed checker single comparator.

4. X = Don't care.

5. Z = High impedance - The maximum current into or out of the disabled outputs shall be as shown:

Device type	03		06	
V_{out}	0.4 V	2.4 V	0.4 V	2.4 V
R_3 - R_0	±20 µA	±20 µA	±20 µA	±20 µA
B_3 - B_0	-50 µA	200 µA	-200 µA	100 µA

6. Test numbers 161 through 212 shall be run in sequence.

7. Maximum limits for device types are: 03 = -20, 06 = -50.

8. Maximum limits for device types are: 03 = 20, 06 = 50.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Electrical ground (common terminal)
V_{IN}	Voltage level at an input terminal
T_C	Case temperature
F_{OSC}	Oscillating frequency

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Generic test data. Generic test data may be used to satisfy the requirements of 4.4.3. Group C generic test data shall be on date codes no more than one year old and on a die in the same microcircuit group (see appendix E of MIL-M-38510) with the same material, design and process and from the same plant as the die represented. Group D (see 4.4.4) generic data shall be on date codes no more than one year old and on the same package type (see terms, definitions, and symbols of MIL-M-38510) and from the same plant as the package represented. The vendor is required to retain the generic data for a period of not less than 36 months from the date of shipment.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	2905
02	2906
03	2907
04	2915
05	2916
06	2917

6.8 Ordering guidance. Since the qualification and certification requirements have been removed from the specification, orders may be placed immediately.

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0603-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/441A	MICROCIRCUITS, DIGITAL, LOW POWER SCHOTTKY TTL, BUS TRANSCEIVER.

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to pro suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, a mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

RADC
Griffiss AFB, NY 13441

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:40Z
Check the source to verify that this is the current version before use.