NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/114D
1 September 1998
SUPERSEDING
MIL-DTL-3943/114C
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL OF VALOR, CHAPLAIN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

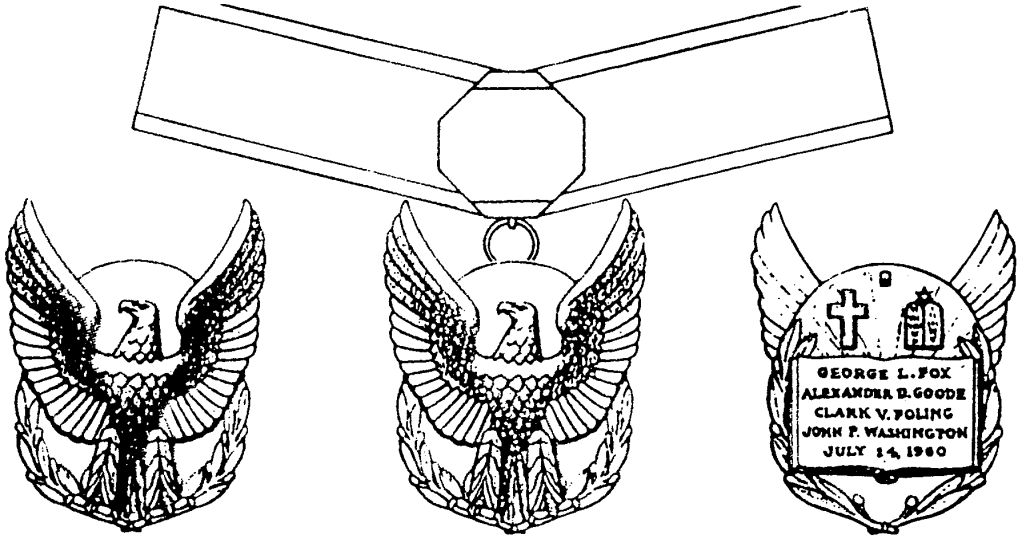

OBVERSE ASSEMBLED REVERSE

MATERIAL: Red Brass

FINISH: Gold Plated, Rose Gold Plated, Relieved, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

DIMENSIONS:
HEIGHT (Overall): 2-5/8 inch (6.67 cm) (REF)
WIDTH (Overall): 2-1/16 inch (5.24 cm) (REF)
THICKNESS (At Eagle's Breast): 0.250 inch ± 0.010 inch (0.635 cm ± 0.025 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A lug shall be formed on the reverse of the pendant in a half circle. The lug shall be 1/4 inch (0.64 cm) in diameter and shall be formed from 0.050 inch (0.127 cm) diameter brass wire. The lug shall be located on the vertical center line of the pendant 3/16 inch $\pm$ 1/16 inch (0.48 cm $\pm$ 0.16 cm) below the top edge. The lug shall be hard soldered in place.

3. The suspension ring shall be formed from 0.050 inch (0.127 cm) diameter brass wire and shall be 1/2 inch $\pm$ 1/8 inch (1.27 cm $\pm$ 0.32 cm) in diameter. The suspension ring shall be finished to match the pendant.

4. The neck ribbon shall be fabricated as shown on Figure 5 of MIL-DTL-3943 except the shield shall be 1-1/4 inch + 0 - 1/8 inch (3.18 cm + 0 - 0.32 cm) square with the corners trimmed 1/4 inch (0.64 cm).

5. Decoration set shall consist of a regular size medal and a service ribbon all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Type I, Class 1 or 3 pad.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/303.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0949)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:51Z
Check the source to verify that this is the current version before use.