

MILITARY SPECIFICATION SHEET

Capacitors, Ceramic, Multilayer, High Voltage, 10,000 V DC, Established Reliability, Style HVR10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49467.

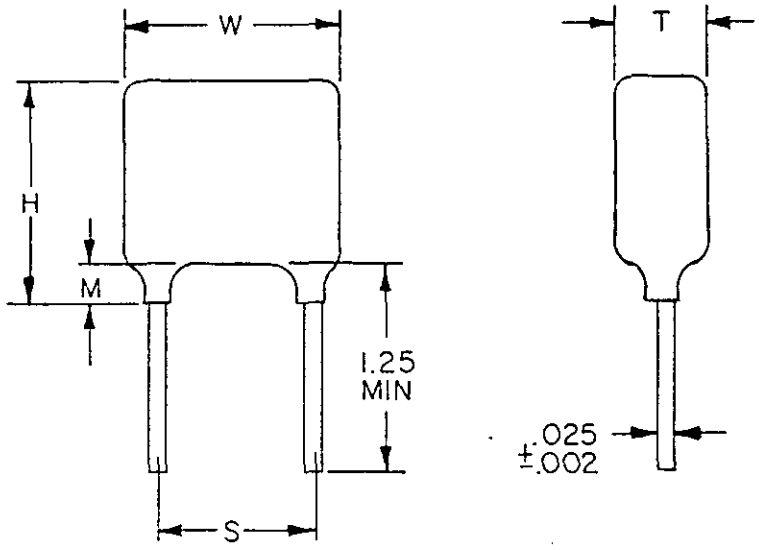



Case code	Dimensions				
	W max	H max	T max	M max	S ±.030
H	1.100	.500	.270	.060	.975
J	1.300	.600	.270	.060	1.175
K	1.500	.720	.270	.060	1.375

Inches	mm	Inches	mm
.002	.05	.975	24.76
.025	.64	1.100	27.94
.030	.76	1.175	29.84
.060	1.52	1.250	31.75
.270	6.86	1.300	33.02
.500	12.70	1.375	34.92
.600	15.24	1.500	38.10
.720	18.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Capacitor style HVR10.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Conformally coated, molded, or encapsulated.

Lead material: In accordance with MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: K = ±10%, M = ±20%. See table I.

Operating temperature range: -55°C to +125°C.

Voltage rating: 10,000 V dc.

Failure rate level: M (1.0%), P (0.1%), R (.01%), or S (.001%).

Dielectric types: BR and BZ in accordance with MIL-C-49467.

Temperature coefficient: ±15%.

Voltage temperature limits: In accordance with MIL-C-49467.

Symbol	Capacitance change with reference to +25°C	
	Steps A through D of voltage temperature limit cycle table of MIL-C-49467. Bias = 0 volt.	Steps E through G of voltage temperature limit cycle table of MIL-C-49467.
BR	±15%	100% rated voltage: +15, -40% 40% rated voltage: +15, -25% 60% rated voltage: +15, -40%
BZ	±15%	

Dissipation factor (25°C): 2.5% maximum, measured under the same conditions as capacitance.

Resistance to soldering heat: ΔC: -1% to +6%.

Marking: In accordance with MIL-C-49467.

APPLICATION NOTES:

Additional encapsulation is necessary in applications where the possibility of a voltage breakdown between the leads of the capacitor, or the capacitor to another potential, could occur.

Heat sinks on each lead or adequate preheating is required when these capacitors are installed in or removed from circuits by soldering iron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

PIN 1/	Capacitance	Capacitance tolerance	Characteristic	Case code
M49467_06471__	470 pF	K, M	BR, BZ	H
M49467_06561__	560	K, M	BR, BZ	H
M49467_06681__	680	K, M	BR, BZ	H
M49467_06821__	820	K, M	BR, BZ	H
M49467_06102__	1000	K, M	BR, BZ	H
M49467_06122__	1200	K, M	BR, BZ	H
M49467_06152__	1500	K, M	BR, BZ	H
M49467R06182__	1800	K, M	BR	J
M49467Z06182__	1800	K, M	BZ	H
M49467_06222__	2200	K, M	BR, BZ	J
M49467_06272__	2700	K, M	BR, BZ	J
M49467R06332__	3300	K, M	BR	K
M49467Z06332__	3300	K, M	BZ	J
M49467R06392__	3900	K, M	BR	K
M49467Z06392__	3900	K, M	BZ	J
M49467_06472__	4700	K, M	BR, BZ	K
M49467_06562__	5600	K, M	BR, BZ	K
M49467_06682__	6800	K, M	BR, BZ	K
M49467_06822__	8200	K, M	BR, BZ	K
M49467_06103__	.01 µF	K, M	BR, BZ	K

1/ The complete PIN shall include additional letter symbols to indicate the characteristic, where applicable, the capacitance tolerance, and the failure rate level.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - MI
Air Force - 11, 19
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1692)

Source: https://assist.dla.mil Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.