INCH-POUND

MIL-DTL-52471/4B
27 April 1998
SUPERSEDING
MIL-H-52471/4A
31 July 1987

DETAIL SPECIFICATION SHEET

HOSE, RUBBER, HYDRAULIC PRESSURE-TYPE, TYPE 100R1 SINGLE-WIRE-BRAID REINFORCEMENT HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52471.

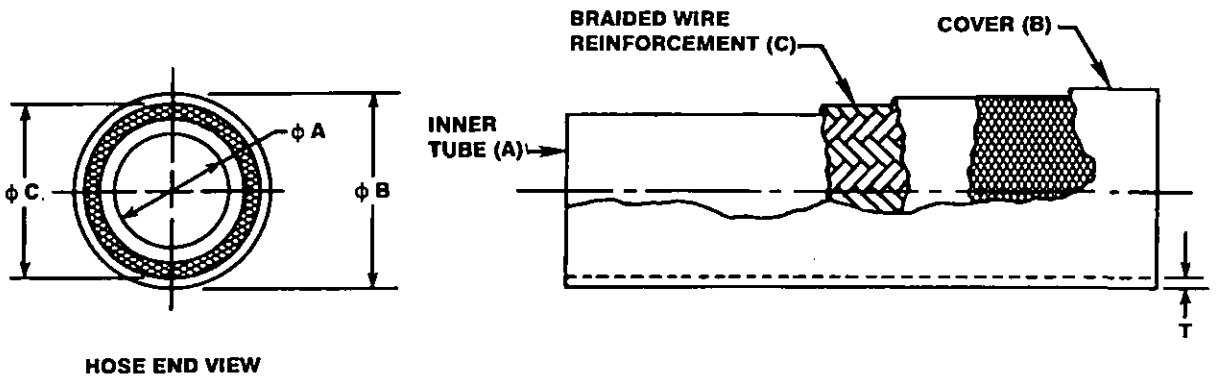


FIGURE 1. Hose: type 100R1, single wire braid reinforcement.

AMSC N/A FSC 4720

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions, type 100R1 hose.

Hose size (inch)	Dash number	A inner tube Inside diameter inch	A inner tube Inside diameter tolerance inch	
1/4	-4	0.250	+0.023	-0.008
3/8	-6	0.375	+0.023	-0.008
1/2	-8	0.500	+0.031	-0.015
3/4	-12	0.750	+0.031	-0.015
1	-16	1.000	+0.040	-0.015
1-1/4	-20	1.250	+0.047	-0.015
1-1/2	-24	1.500	+0.047	-0.015
2	-32	2.000	+0.047	-0.015

TABLE II. Cover dimensions, type 100R1 hose.

Hose size (inch)	Dash number	B cover Maximum outside diameter inch	B cover Minimum outside diameter inch	B cover alternate Maximum outside diameter inch
1/4	-4	0.656	0.594	0.557
3/8	-6	0.812	0.750	0.713
1/2	-8	0.938	0.875	0.846
3/4	-12	1.219	1.156	1.127
1	-16	1.547	1.453	1.440
1-1/4	-20	1.875	1.750	1.766
1-1/2	-24	2.125	2.000	2.047
2	-32	2.688	2.562	2.594

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE III. Wire reinforcement dimensions, type 100R1 hose.

Hose size (inch)	Dash number	C Wire reinforcement		T Alternate cover thickness range	
		Maximum outside diameter inch	Minimum outside diameter inch	Maximum inch	Minimum inch
1/4	-4	0.461	0.416	0.060	0.030
3/8	-6	0.617	0.571	0.060	0.030
1/2	-8	0.750	0.688	0.060	0.030
3/4	-12	1.031	0.969	0.060	0.030
1	-16	1.344	1.281	0.060	0.030
1-1/4	-20	1.641	1.547	0.080	0.040
1-1/2	-24	1.891	1.797	0.100	0.050
2	-32	2.438	2.312	0.100	0.050

TABLE IV. Hose operating pressure.

Hose size (inch)	Dash number	Operating pressure psi MAX
1/4	-4	2750
3/8	-6	2250
1/2	-8	2000
3/4	-12	1250
1	-16	1000
1-1/4	-20	625
1-1/2	-24	500
2	-32	375

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:19Z
Check the source to verify that this is the current version before use.

TABLE V. Concentricity.

Hose size (inch)	Concentricity (FIM) between	
	Tube inside diameter (A) and cover outside diameter (B) inch	Tube inside diameter (A) and reinforcement outside diameter (C) inch
1/4	0.030	0.017
3/8, 1/2, 3/4	0.040	0.024
1, 1-1/4, 1-1/2, 2	0.050	0.031

REQUIREMENTS:

1. The hose shall be in accordance with figure 1 and tables I through V.

2. Inside and outside diameters are measured at least 2 inches from the end.

3. This hose must be listed on QPL-52471.

NOTES:

1. Part number: The military part number corresponds to the size of hoses covered by this specification sheet. The specification sheet number and the size dash number form a military part number.

Example of a military part number: M52471/4-4

M52471/4 -4

Specification sheet number

Size dash number
(see tables)

CONCLUDING MATERIAL

Custodian:
Army - AT
Navy - SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 4720-0191-04)

Review activities:
Army - AR, GL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.