INCH-POUND
MIL-DTL-62738A(AT)
23 January 1998
SUPERSEDING
MIL-P-62738(AT)
16 March 1992

DETAIL SPECIFICATION

PRINTED WIRING ASSEMBLY, IGNITION INTERRUPT DRIVER

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an Ignition Interrupt Driver Printed Wiring Assembly referred to herein as the PWA. This is one of six printed wiring assemblies which comprise the Simplified Test Equipment/Internal Combustion Engine-Reprogrammable (STE/ICE-R) Vehicle Test Meter (VTM) (see Drawing 12259265).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 5998

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810 - Environmental Test Methods and Engineering Guidelines (see 4.2.1).

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

12258887 - Printed Wiring Assembly, Ignition Interrupt.

(Copies of these drawings are available from the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/IPC J-STD-001 - Requirements for Soldered Electrical and Electronic Assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American National Standards Institute (ANSI), 11 West 42nd Street, New York, NY 10036.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.1.1.

3.2 Design, materials, and manufacturing processes. Design, materials, and manufacturing process selection shall be as specified herein and in applicable referenced specifications, standards, and drawings. Materials shall be uniform and free from imperfections or defects which affect their performance and serviceability. All metallic parts shall be made from corrosion-resistant metals or treated with corrosion-resistant materials. Asbestos and cadmium materials shall not be used in any form in any part of the PWA. No item, part or assembly shall contain radioactive materials in which the specific activity is greater than 0.002 microcuries per gram or activity per item equals or exceeds 0.01 microcuries.

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Operating requirements. The PWA shall meet the following performance requirements:

3.3.1 Input power. The PWA shall require not more than the current specified in table I.

TABLE I. Input power.

Source	Voltages	Current
E6	24 Vdc 1/	84 mA 2/ 3/
E7	5 Vdc	32 mA 4/

1/ Vdc = volts direct current.
2/ mA = milliampere.
3/ E8 = open circuit.
4/ E8 = grounded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

3.3.2 Complementary metal oxide semiconductor (CMOS) logic levels. Unless otherwise specified (see 6.2), CMOS logic levels accepted by and output from the PWA shall be as follows:

Input High (Logic Level 1) = 3.5 Vdc minimum (min)
Input Low (Logic Level 0) = 1.5 Vdc maximum (max.)
Output High (Logic Level 1) = 4.5 Vdc min
Output Low (Logic Level 0) = 0.5 Vdc max.
Output High at E4 (Logic Level 1) = 7.0 Vdc min
Output Low at E4 (Logic Level 0) = 0.5 Vdc max.

3.3.3 PWA set up. The PWA shall be set up with the following characteristics for the following requirements: E5 and E9 shall be at ground; E7 shall be at 5 ±0.1 Vdc; E6 shall be at 24 Vdc; input signals shall be applied at E1 with respect to E2 or at E10 with respect to E11. An 18 ±1.8 kilohms (kohm) pull-up resistor shall be connected from E4 to 8.0 ±0.4 Vdc.

3.3.4 Input peak limiting. A signal with source impedance of 100 ±10 ohms and peaks of 1000 ±100 V shall be limited to less than 400 V peaks when applied at E1 with respect to E2.

3.3.5 Points voltage output signal. When 50 ±17% duty cycle square wave with a source impedance of 10 ±1 ohms and amplitude from zero to the same voltage as that at E6 is applied at E1 with respect to E2, the signal at E3 with respect to E2 shall be a positive square wave with amplitude of 6.8 ±0.6 V.

3.3.6 Ignition signal output. When a square wave of amplitude from zero to the same voltage as the voltage at E6 is applied at E1 with the respect to E2, the signal at E4 with respect to E5 shall have the same frequency as the input signal. The rising edge of the signal at E4 shall be between 130 and 800 microseconds (µs) after the falling edge of the signal at E1. The output shall conform to the logic levels given in 3.3.2.

3.3.7 Ignition inhibit. When a square wave of the amplitude from zero to the same voltage as that at E6 is applied at E1 with respect to E2 from a source with output impedance of 10 ±1 ohms and the capability of sourcing not less than 2 amperes, a logic level 0 applied at E8 shall cause the amplitude of the signal applied at E1 to be pulled down to 6 ±1 V.

3.3.8 Soldering. Soldering shall meet or exceed the requirements of ANSI/IPC J-STD-001 (see 4.2).

3.4 Interface requirements.

3.4.1 Overall envelope. Overall envelope of the PWA shall be in accordance with Drawing 12258887.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

3.5 Ownership and support requirements. The PWA shall meet the following logistics requirements.

3.5.1 Interchangeability. Interchangeability tolerances should permit parts, subassemblies, and assemblies to be used in their parent assemblies without regard to the source of supply or manufacturer. Parts, subassemblies, and assemblies having the full range of dimensions and characteristics permitted by the specification governing the part, subassembly or assembly should be usable as replacement items without selection and without departure from the specified performance guidelines of the parent items.

3.5.2 Identification marking. Unless otherwise specified (see 6.2), identification marking shall be permanent and legible and shall include as a minimum the following.

a. Nomenclature “PRINTED WIRING ASSEMBLY, IGNITION INTERRUPT DRIVER”.
b. Military part number.
c. Manufacturer’s cage code and name.
d. Manufacturer’s serial numbers.
e. Contract number.
f. Symbol “U.S.”.

3.6 Operating environment requirements. The PWA shall operate under the following environmental conditions, without degradation in performance:

3.6.1 Temperature.

3.6.1.1 High temperature (operating). The PWA shall be capable of operation without damage or malfunction at a high temperature of 125 degrees Fahrenheit (°F) (52 degrees Celsius (°C) (without solar radiation).

3.6.1.2 Low temperature (operating). The PWA shall be capable of operation without damage or malfunction at a low temperature of 20°F (-7°C). For ambient temperatures below 20°F, the test set shall be operated in a shelter.

3.6.1.3 High temperature (nonoperating). The PWA shall be capable of being stored and transported in its case without damage at an ambient temperature of +160°F (+71°C).

3.6.1.4 Low temperature (nonoperating). The PWA shall be capable of being stored and transported in its case without damage in ambient temperatures of -60°F (-51°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

3.6.2 Fungus. All nonmetallic materials that are not inherently fungistatic shall function in a fungus environment without adversely affecting the operation/performance of the PWA.

3.6.3 Shock. The PWA shall evidence no degradation of function and meet the requirements of 3.3 when subjected to the shock test.

3.6.4 Vibration. The PWA shall evidence no degradation of function and meet the requirements of 3.3 when subjected to the vibration test.

3.6.5 Burn-in. Unless otherwise specified (see 6.2), the PWA shall be subjected to and pass a “power on” burn-in prior to the inspections listed in 4.1.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.1.1).
b. Conformance inspection (CI) (see 4.1.2).

4.1.1 First article inspection. Unless otherwise specified (see 6.2), the Government shall select one PWA produced under the production contract for first article inspection. First article sample shall include all the verifications listed in table II.

4.1.2 CI 100% inspection. CI shall be conducted on all items (100% inspection), and shall include those examinations and tests from table II as specified in the contract.

4.2 Verification methods. Acceptable verification methods included in this section are visual inspection, and measurement, sample tests, full-scale demonstration tests, simulation, modeling, engineering evaluation, component properties analysis, and similarity to previously-approved or previously-qualified designs.

4.2.1 Verification alternatives. The manufacturer may propose alternative test methods, techniques, or equipment, including the application of statistical process control, tool control, or cost effective sampling procedures to verify performance. See the contract for alternatives that replace verification methods required by this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

TABLE II. Verification methods.

Title	Requirement	Verification
Design, materials & manufacturing processes	3.2	4.2
Operating requirements	3.3	4.2.3
Input power	3.3.1	4.2.3.1
Logic levels	3.3.2	4.2.3.2
PWA set up	3.3.3	4.2.3.3
Input peak limiting	3.3.4	4.2.3.4
Point voltage output signal	3.3.5	4.2.3.5
Ignition signal output	3.3.6	4.2.3.6
Ignition inhibit	3.3.7	4.2.3.7
Interface requirements	3.4	4.2.4
Overall envelope and interfaces	3.4.1	4.2.4.1
Ownership & support requirements	3.5	4.2.5
Interchangeability	3.5.1	4.2.5.1
Identification marking	3.5.2	4.2.5.2
Operating environment requirements	3.6	4.2.6
Temperature	3.6.1	4.2.6.1
Fungus	3.6.2	4.2.6.2
Shock	3.6.3	4.2.6.3
Vibration	3.6.4	4.2.6.4

4.2.2 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed under the following standard (room) ambient conditions:

a. Temperature: 77 ± 18°F (25 ±8°C).
b. Relative humidity: Uncontrolled room ambient.
c. Barometric pressure: Site pressure.

4.2.3 Operating requirements verification.

4.2.3.1 Input power. To determine conformance to 3.3.1, the input current shall be measured with an ammeter.

4.2.3.2 CMOS logic levels. To determine conformance to 3.3.2, the input and output CMOS logic levels shall be observed and verified with an oscilloscope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

4.2.3.3 PWA setup. To determine conformance to 3.3.3, E5 and E9 shall be attached to ground. An 18 kohm resistor shall be attached at E4 and 8.0 ±0.4 Vdc shall be applied to the unterminated end. A 24 Vdc shall be applied at E6. A 5.0 ±0.1 Vdc shall be applied at E7. These voltages shall be verified to be present with a voltmeter for the tests of 4.2.3.4 through 4.2.3.7.

4.2.3.4 Input peak limiting. To determine conformance to 3.3.4, the waveform of figure 1 shall be applied at E1 with respect to E2 and the signal at E1 shall be verified to approximate the waveform of figure 2.

4.2.3.5 Points voltage output signal. To determine conformance to 3.3.5, an 18 ± 1.8 kohm resistor shall be connected to E4 and 8.0 ±0.4 Vdc shall be applied to the unterminated end. The waveform of figure 3 shall be applied at E1 with respect to E2 using a source with output impedance of 10 ±1 ohms. The signal amplitude shall be measured at E3 and it shall be verified that no signal peak exceeds 6.8 ±0.6 V.

4.2.3.6 Ignition signal output. To determine conformance to 3.3.6, the signal of figure 3 shall be applied to E1 with respect to E2 and it shall be verified that the signal at E4 conforms to the requirements of 3.3.6. Trigger the oscilloscope on the negative slope of the output at E3. Measure that time interval from the start of the sweep until the output signal reaches half of its peak level.

4.2.3.7 Ignition inhibit. To determine conformance to 3.3.7, a 10 ohm, 10%, 100 watt resistor shall be attached to E1 and the waveform of figure 3 shall be applied at the unterminated end with respect to E2 with a source capable of supplying not less than 2 amperes. A logic level 0 shall be applied at E8 and it shall be verified that the signal at E1 conforms to the requirements of 3.3.7.

4.2.4 Interface requirements verification.

4.2.4.1 Overall envelope inspection. Insert the PWA into the present existing location of the test set, verify its envelope and interfacing conformance.

4.2.5 Ownership and support requirements verification.

4.2.5.1 Interchangeability inspection. To determine conformance to 3.5.1, the interchangeability between different parts, subassemblies, and assemblies having the same military part number shall be verified.

4.2.5.2 Identification marking inspection. Verify the presence of the required PWA identification marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

4.2.6 Operating environment requirements verification. The electrical performance tests specified in 4.2.3.1 through 4.2.3.7 shall be conducted prior to and at the completion of each environmental test. Verification of performance during the high temperature and low temperature environmental tests shall be demonstrated by the tests specified in 4.2.3.1, and 4.2.3.4 through 4.2.3.7.

4.2.6.1 Temperature. To determine conformance to 3.6.1, the PWA shall be tested as follows:

4.2.6.1.1 High temperature (operating). To determine conformance to 3.6.1.1, the PWA shall be subjected to high temperature test in accordance with method 501.3, procedure II of MIL-STD-810, or equivalent (see 4.2.1), and tested to 3.3.

4.2.6.1.2 Low temperature (operating). To determine conformance to 3.6.1.2, the PWA shall be subjected to low temperature test in accordance with method 502.3, procedure II of MIL-STD-810, or equivalent (see 4.2.1), and tested to 3.3.

4.2.6.1.3 High temperature (nonoperating). To determine conformance to 3.6.1.3, the PWA shall be subjected to high temperature test in accordance with method 501.3, procedure I of MIL-STD-810, or equivalent (see 4.2.1).

4.2.6.1.4 Low temperature (nonoperating). To determine conformance to 3.6.1.4, the PWA shall be subjected to low temperature test in accordance with method 502.3, procedure I of MIL-STD-810, or equivalent (see 4.2.1).

4.2.6.2 Fungus. To determine conformance to 3.6.2, the PWA shall be subjected to the fungus test in accordance with method 508.4 of MIL-STD-810 (28 day test), or equivalent (see 4.2.1).

4.2.6.3 Shock. To determine conformance to 3.6.3, the PWA shall be subjected to the shock test in accordance with method 516.4, procedure I, 40g peak of MIL-STD-810, or equivalent (see 4.2.1), and tested to 3.3 after shock test.

4.2.6.4 Vibration. To determine conformance to 3.6.4, the PWA shall be subjected to a vibration test using a composite of figures 4 through 6. These figures represent the cargo environment at the cargo bed of a composite of tactical wheeled vehicles, the 5-ton M813 truck and the 12-ton M127 semitrailer. The data include differing vehicle loading conditions traversing over specially designed courses ranging from paved highway to off road conditions at various vehicle speeds. The spectrum is broadband random with peaks and notches at various discrete frequency bands. Break points are provided for establishing the spectrum shape. The test duration is 500 miles. The PWA shall be tested to 3.3 after the vibration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

4.2.6.5 Burn-in. When required (see 6.2), the burn-in shall consist of three temperature cycles and a six gravity unit (g) root mean square (rms) random vibration as follows:

a. Temperature cycle. Each temperature cycle shall consist of 30 minutes at -60°F (-51°C) and 30 minutes at +125°F (52°C). The rate of temperature change between temperature extremes shall be not less than 5°F (2.8°C) per minute. Power shall be applied to the PWA for not less than 30 minutes from 20°F (-7°C) through the completion of each high-temperature soak.
b. Random vibration. Following all temperature cycling, the PWA shall be hard mounted to the vibration table so that the axis of vibration is perpendicular to the plane of the PWA. The vibration shall be at room ambient temperature for a period of 10 minutes as shown in figure 7.

NOTE: PWAs being procured for simultaneous installation in VTMs being procured do not have to be subjected to “burn-in” provided the VTMs are subjected to a 16-hour “power on” burn-in.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point’s packaging activity within the Military Department or Defense Agency, or within the Military Department’s System Command. Packaging data retrieval is available from the managing Military Department’s or Defense Agency’s automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The PWA consists of special circuitry to interface to an automotive spark ignition system. This module has Points Voltage (POINTS V), and Ignition Kill (IGN KILL) as its inputs, and Ignition Signal (ING SIG) and POINTS V as its outputs. This module can either interrupt or continuously inhibit spark ignition according to the control signal IGN KILL. The Points Signal is transformed by circuitry utilizing an optocoupler (UI) into logic levels suitable for detection by the VTM through the signal IGN SIG. The interrupt or inhibit signal, IGN KILL, is transformed from VTM logic levels into signals driving a transistor circuit (Q1 and Q2). The transistor circuit pulls the POINTS V down to a level such that the spark plugs

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

in the engine will not fire. The PWA is military unique because it is designed specifically to be a component of the Simplified Test Equipment/Internal Combustion Engine - Reprogrammable (STE/ICE-R) Vehicle Test Meter (VTM) and to withstand environmental conditions which exceed commercial requirements.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
c. If first article inspection is required (see 3.1).
d. If CMOS logic levels should be other than as specified (see 3.3.2).
e. PWA drawing number, revision letter, date and PWA part number (see 3.2 and 3.5.2).
f. If marking is other than as specified (see 3.5.2).
g. If burn-in is not required (see 3.6.5).
h. Packaging requirements (see 5.1).

6.3 First article. When requiring a first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or the number of test items. These documents should also include specific instructions regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Pre-solicitation documents should provide Government waiver rights for samples for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on such production testing must furnish evidence with the bid that prior Government approval is appropriate for the pending contract.

6.4 Conformance inspection. Affordable conformance inspection with confidence varies depending upon a number of procurement risk factors. Some of these factors include: Contractor past performance, Government schedules and budget, product material and design maturity, manufacturing capital equipment and processes applied, the controlled uniformity of those processes, labor skill and training, and the uniformity of measuring processes and techniques. During the solicitation, contracting documents should indicate those tests desired from table II and their designated frequency based on a risk assessment for the procurement.

6.5 Historical data. Historically, ATPD 2147, dated 9 March 1988, was superseded by MIL-DTL-62738A(AT).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

Automatic testing equipment (ATE)
Ignition inhibits
Ignition signal outputs
Simplified test equipment/Internal combustion engine - Reprogrammable (STE/ICE-R)
Vehicle test meter (VTM)

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

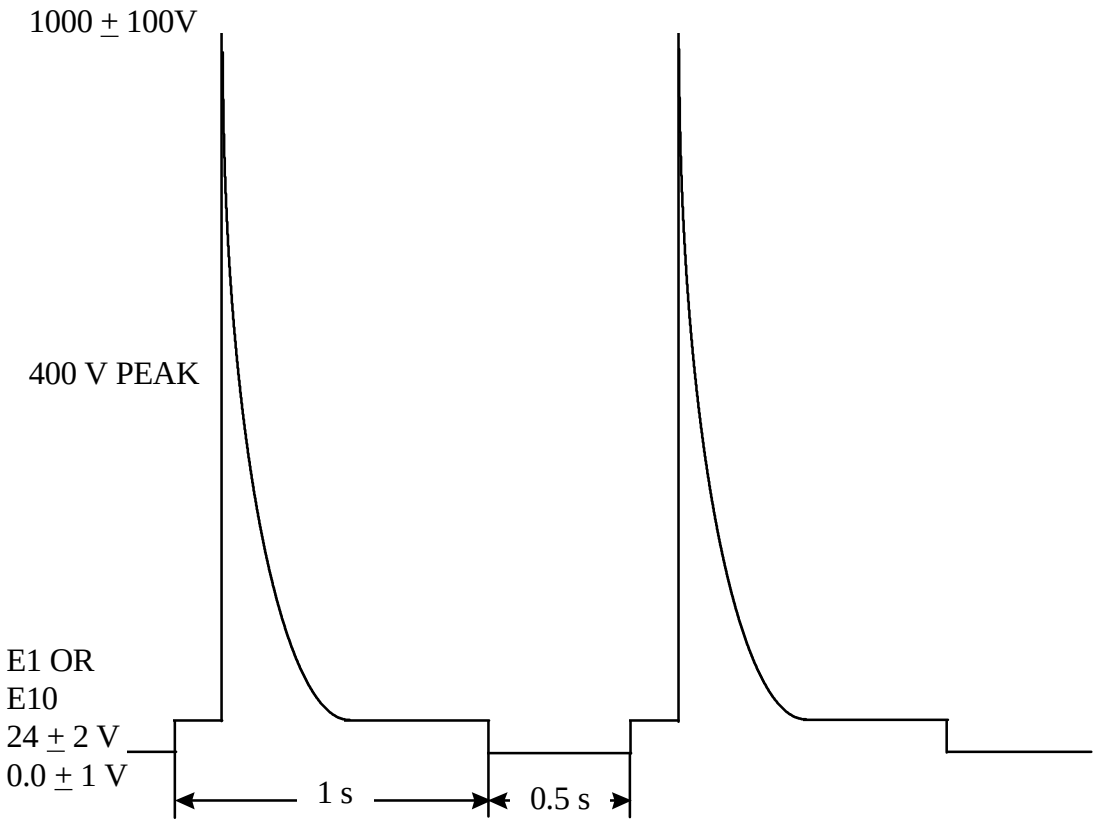


FIGURE 1. Waveform to test input peak limiting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

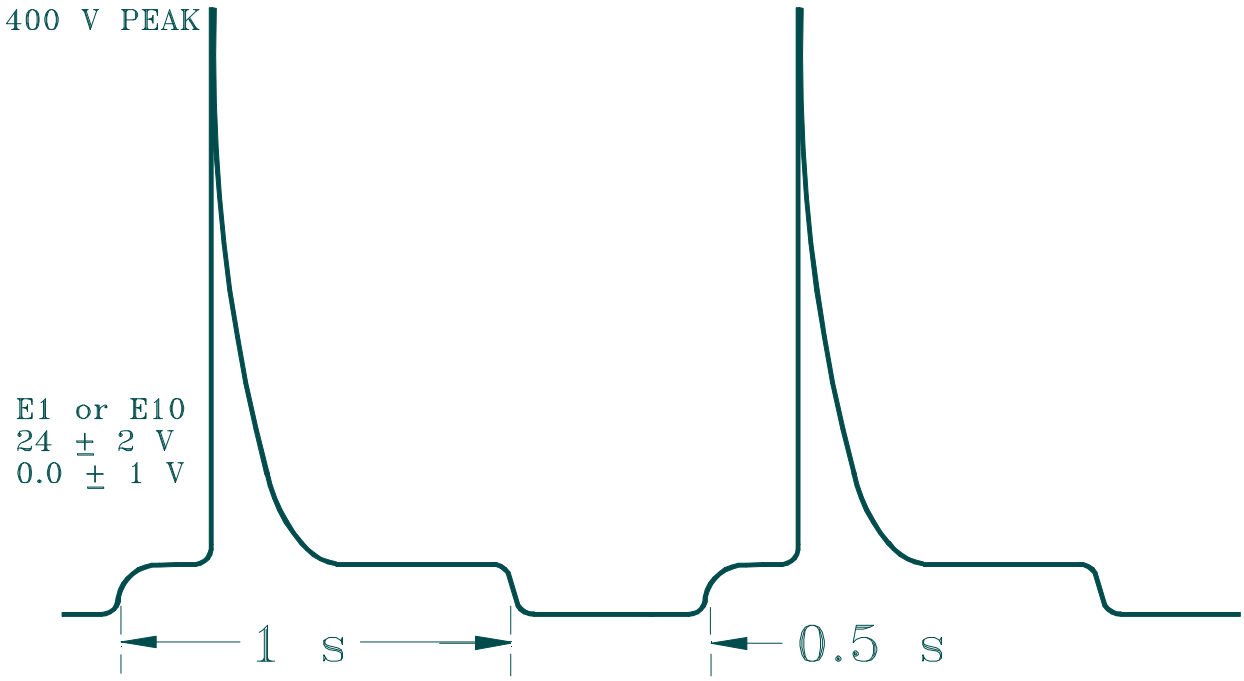


FIGURE 2. Input waveform after peak limiting.


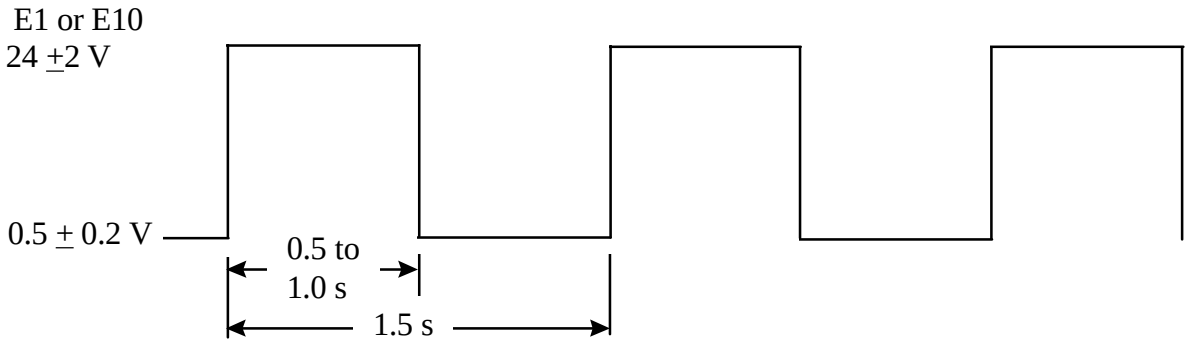


FIGURE 3. Waveform to simulate points voltage.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

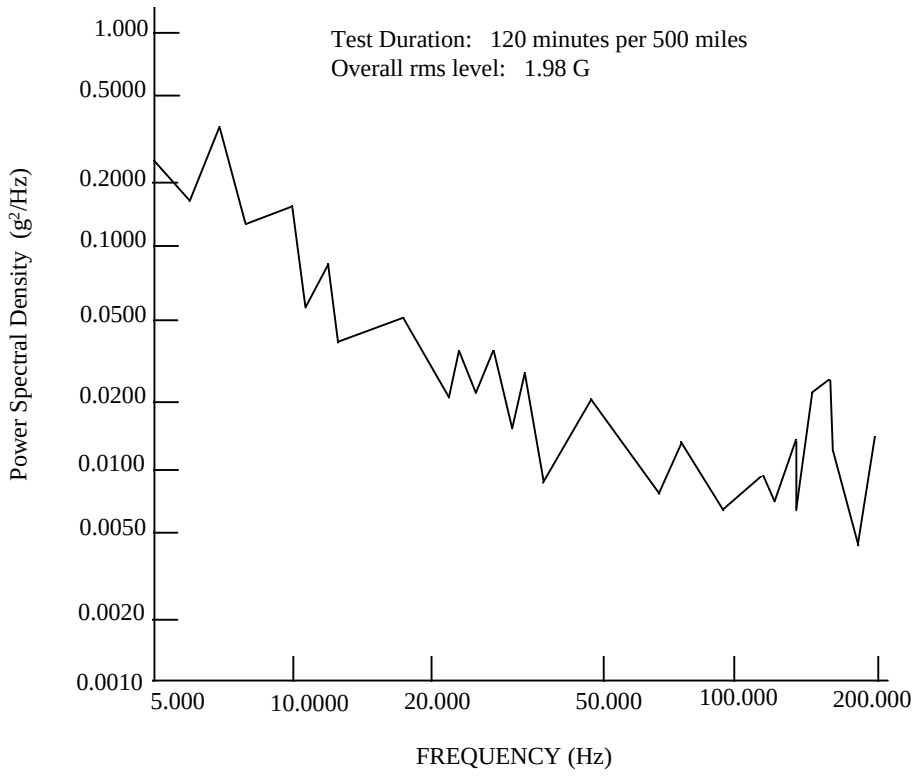

BREAKPOINTS	
FREQ	PSD VALUE
5	0.23840
6	0.16840
7	0.38230
8	0.14870
10	0.16840
11	0.05930
12	0.09750
13	0.04090
18	0.05370
23	0.01940
24	0.03520
26	0.02310
28	0.03520
32	0.01670
33	0.03110
37	0.00810
49	0.02190
63	0.00700
73	0.01150
98	0.00660
120	0.00970
123	0.00680
138	0.01340
140	0.00760
146	0.02490
159	0.02820
163	0.01300
188	0.00480
200	0.01340

FIGURE 4. Basic transportation, composite tactical wheeled environment, vertical axis.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

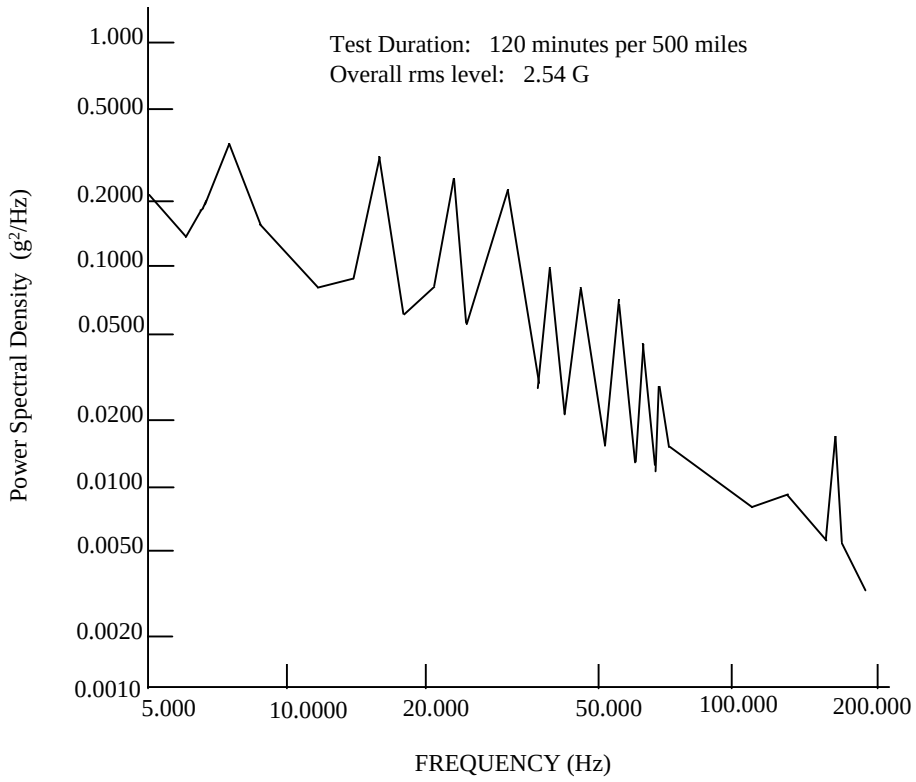

BREAKPOINTS	
FREQ	PSD VALUE
5	0.22130
6	0.13140
7	0.20540
8	0.38230
9	0.15630
12	0.07990
15	0.08830
16	0.32940
19	0.06080
22	0.09280
24	0.26340
27	0.05640
32	0.22690
36	0.02820
40	0.11600
44	0.02090
48	0.08190
53	0.01480
56	0.07420
60	0.01270
64	0.04980
65	0.01100
68	0.03260
69	0.01480
114	0.00740
132	0.00830
160	0.00510
169	0.01710
173	0.00550
200	0.00310

FIGURE 5. Basic transportation, composite tactical wheeled environment, longitudinal axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

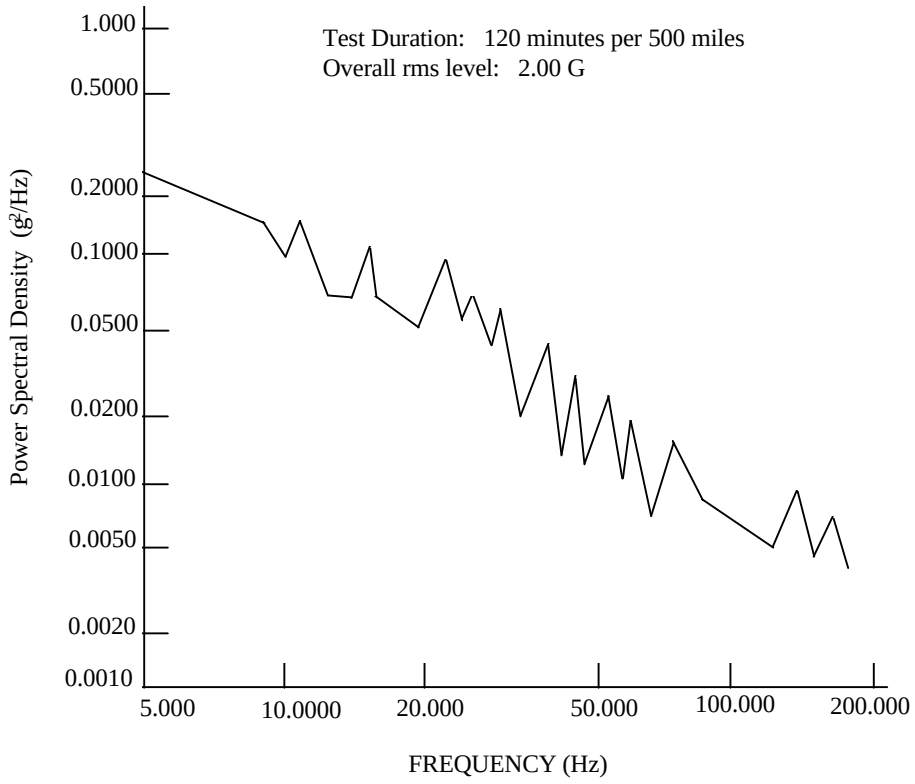

BREAKPOINTS	
FREQ	PSD VALUE
5	0.25490
10	0.13030
11	0.09670
12	0.13360
13	0.06500
15	0.06340
16	0.11230
17	0.06500
22	0.04590
24	0.08980
26	0.05070
28	0.06830
30	0.03670
32	0.05880
38	0.01920
40	0.03860
44	0.01290
48	0.02940
50	0.01140
56	0.02460
60	0.00960
63	0.01880
70	0.00660
78	0.01500
93	0.00730
137	0.00460
145	0.00910
162	0.00430
176	0.00660
200	0.00360

FIGURE 6. Basic transportation, composite tactical wheeled environment, transverse axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

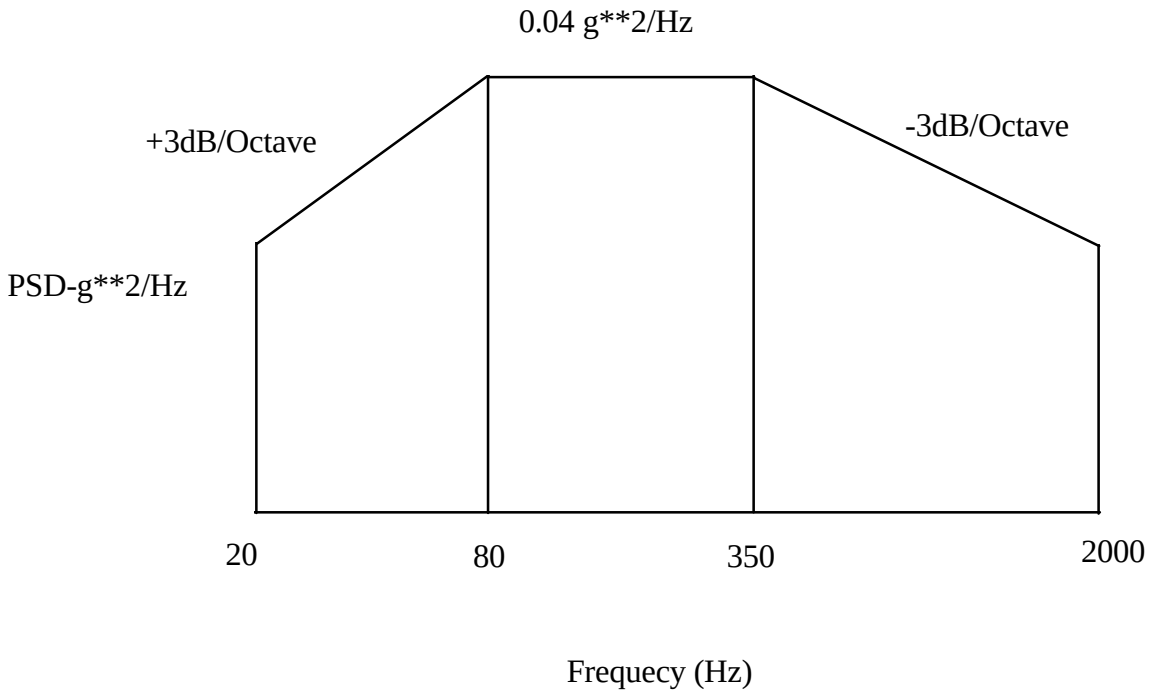


FIGURE 7. Random vibration spectrum.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 5998-0079)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
	MIL-DTL-62738A(AT)	980123

3. DOCUMENT TITLE

Printed Wiring Assembly, Ignition Interrupt Driver

4. NATURE OF CHANGE ***(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)***

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*
	(1) Commercial (810) 574-8745 (2) AUTOVON 786-8745
c. ADDRESS *(Include Zip Code)* Commander U.S. Army Tank-automotive and Armaments Command ATTN: AMSTA-TR-E/BLUE Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:51Z
Check the source to verify that this is the current version before use.