INCH-POUND

MIL-PRF-49471/7(ER)
2 June 1995

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-X588/U

This specification sheet is approved for use within Army Research Laboratory and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-49471(ER).

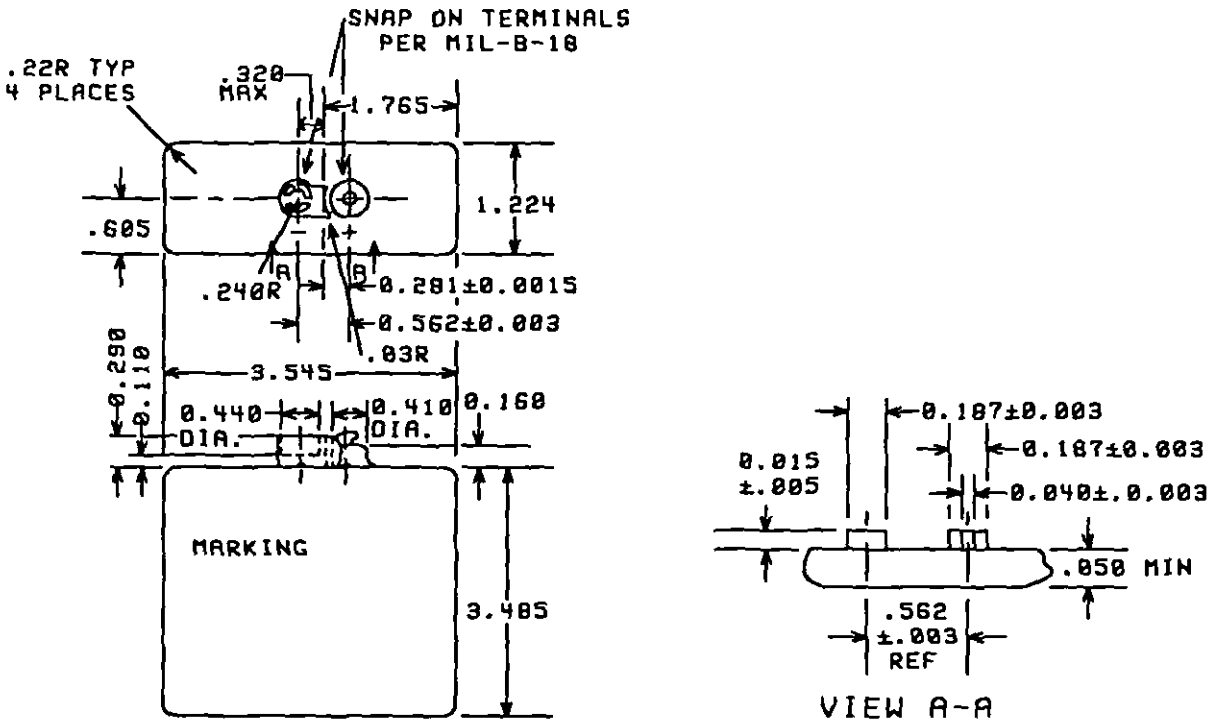


Figure 1. Battery dimensions and wiring schematic.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimension are in inches.

2. Tolerances, unless otherwise specified, are ±.015 inch.

3. The battery connector shall be snap-on terminals per MIL-B-18 with protective shield (negative terminal) as shown in Figure 1.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 15.25 volts.

Minimum voltage (for capacity): 11.00 volts.

Safety features: Applicable.

Charge protection feature: Applicable.

Terminals: Snap-On type (see Figure 1).

Weight (maximum): 0.65 pound (295 grams).

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below:

Capacity Test	Minimum Capacity Requirements in Hours to 11.00 Volts
I	3.6
L	1.8
H	3.6
HT	3.1
LT	1.7
IT	3.3

Initial voltage delay: During the I, H, HT, and IT discharge tests, initial voltages below the 11.00 volt minimum voltage cannot exceed a 10 second duration. During L discharge tests initial voltage below 10.00 volts cannot exceed a 12 second duration. During LT discharge tests initial voltage below 10.00 volts cannot exceed a 20 second duration.

High temperature device: Applicable.

Complete discharge device: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

METHODS OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage:

Details on storage conditions for all specified capacity tests are described in the basic specification (see 4.8.9).

(2) Discharge:

Cells (forced discharge): Two cells shall be discharged at 0.8 amperes at 70±5°F to 2/3 of open-circuit voltage. Each discharged cell shall then be connected in series to four fresh cells. Each string shall be discharged at 0.8 amperes at 70±5°F to 2/3 open-circuit voltage of the four fresh cells.

Batteries: For all capacity tests the batteries shall be discharged at 0.8 ampere constant current to zero volts.

Closed-circuit voltage: Load resistance of 25 ohms shall be used between battery terminals. Voltage shall be above 11.00 volts within 10 seconds.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project 6135-A274-07)

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:12Z
Check the source to verify that this is the currentversion before use.