INCH-POUND

MIL-T-55164/21A
21 November 1988
SUPERSEDING
MIL-T-55164/21
30 June 1967

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 17TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

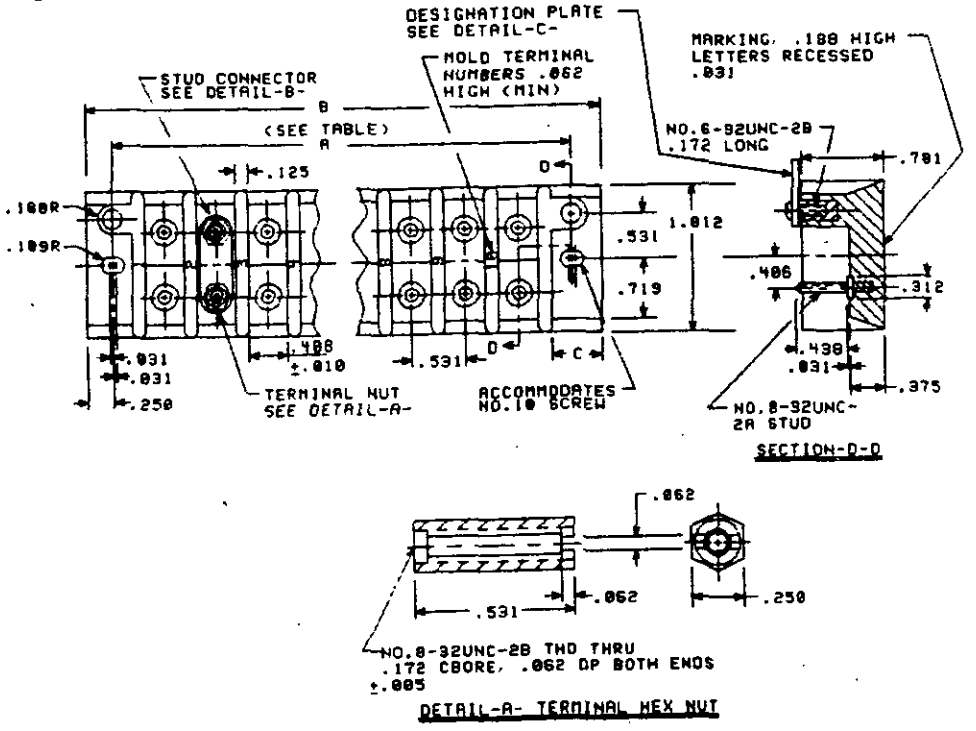



Figure 1. Dimensions and Configuration.

AMSC N/A


FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:32Z
Check the source to verify that this is the current version before use.

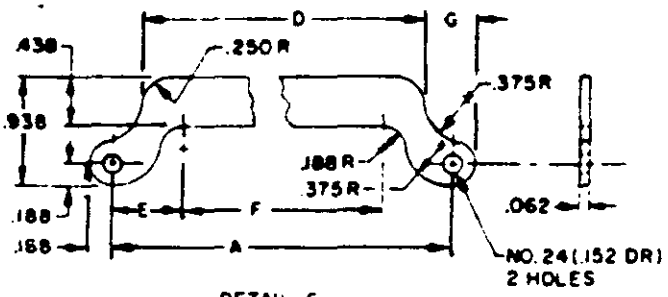

DETAIL-C-
DESIGNATION PLATE



DETAIL-B-
STUD CONNECTOR

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±0.016 inch.
4. Studs shall be threaded to within 0.046 inch of the stud shoulder.

Type designation	Dimensions 1/ 2/						
	A	B	C	D	E	F	G
17TB4F	2.875 (73.03)	3.375 (85.73)	0.562 (14.27)	2.250 (57.15)	0.625 (15.88)	1.625 (41.28)	0.500 (12.70)
17TB10F	6.000 (152.40)	6.500 (165.10)	0.531 (13.49)	5.500 (139.70)	0.594 (15.09)	4.812 (122.22)	0.438 (11.13)

1/ Dimensions are in inches: millimeters are in parentheses.
2/ Tolerances on terminal boards up to and including 6 inches in length:

for A dimension: +.031, -.016
for B dimension: +.031, -.062
Over 6 inches in length:
for A dimension: +.047, -.031
for B dimension: +.047, -.062

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration : See figure 1 and table.

Voltage rating (maximum): 600 volts.

Current rating: 40 amps.

Maximum number of terminal lugs for each stud: 3. (with the stud connector removed, this terminal board shall provide twice the number of connector points and shall allow for an additional terminal lug per stud terminal (4), however, this removal shall reduce the current rating to 30 amps).

Recommended wire terminal lugs: Type L-80 of MIL-T-16366.

	17TB4	17TB10
Terminal nuts required	8	20
Stud connectors required	4	10

Plastic material: Type GDI-30F or MAI-60 of MIL-M-14.

Dielectric withstanding test voltage: 2200 volts rms.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Air Force - 85
Navy -

Preparing activity:
Army - ER
(Project 5940-1017-13)

Review activities:
Army - MI
Air Force - 99
Navy -
DLA-GS

User activities:
Army - AV, AT, ME
Navy - MC, AS, SH
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.