MILITARY SPECIFICATION SHEET

CABINET, STORAGE, STEEL: RECTIFIER, LABORATORY SUPPLIES; TYPE XIII

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown on figure 1.

COMPONENTS:

Doors, hinges, knobs, shelf, plastic covered plywood top, moulding, and cabinet liner shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

Shelf. The shelf shall be nonadjustable and centered within the cabinet.

Cabinet top. The cabinet top shall be fabricated of 3/4 inch thick plywood as specified in MIL-C-40060.

Moulding. The moulding shall be fabricated of corrosion resisting steel, shall be attached to plywood top with pan head tapping screws. The top of the moulding shall be flush with or slightly below the surface of the plastic covering.

Cabinet liner. The cabinet shall be lined with material specified on figure 1 and the application of the lining shall be in accordance with the manufacturer's commerical practice.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/13

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 20261O-21T19:09Z
Check the source to verify that this is the current version before use.

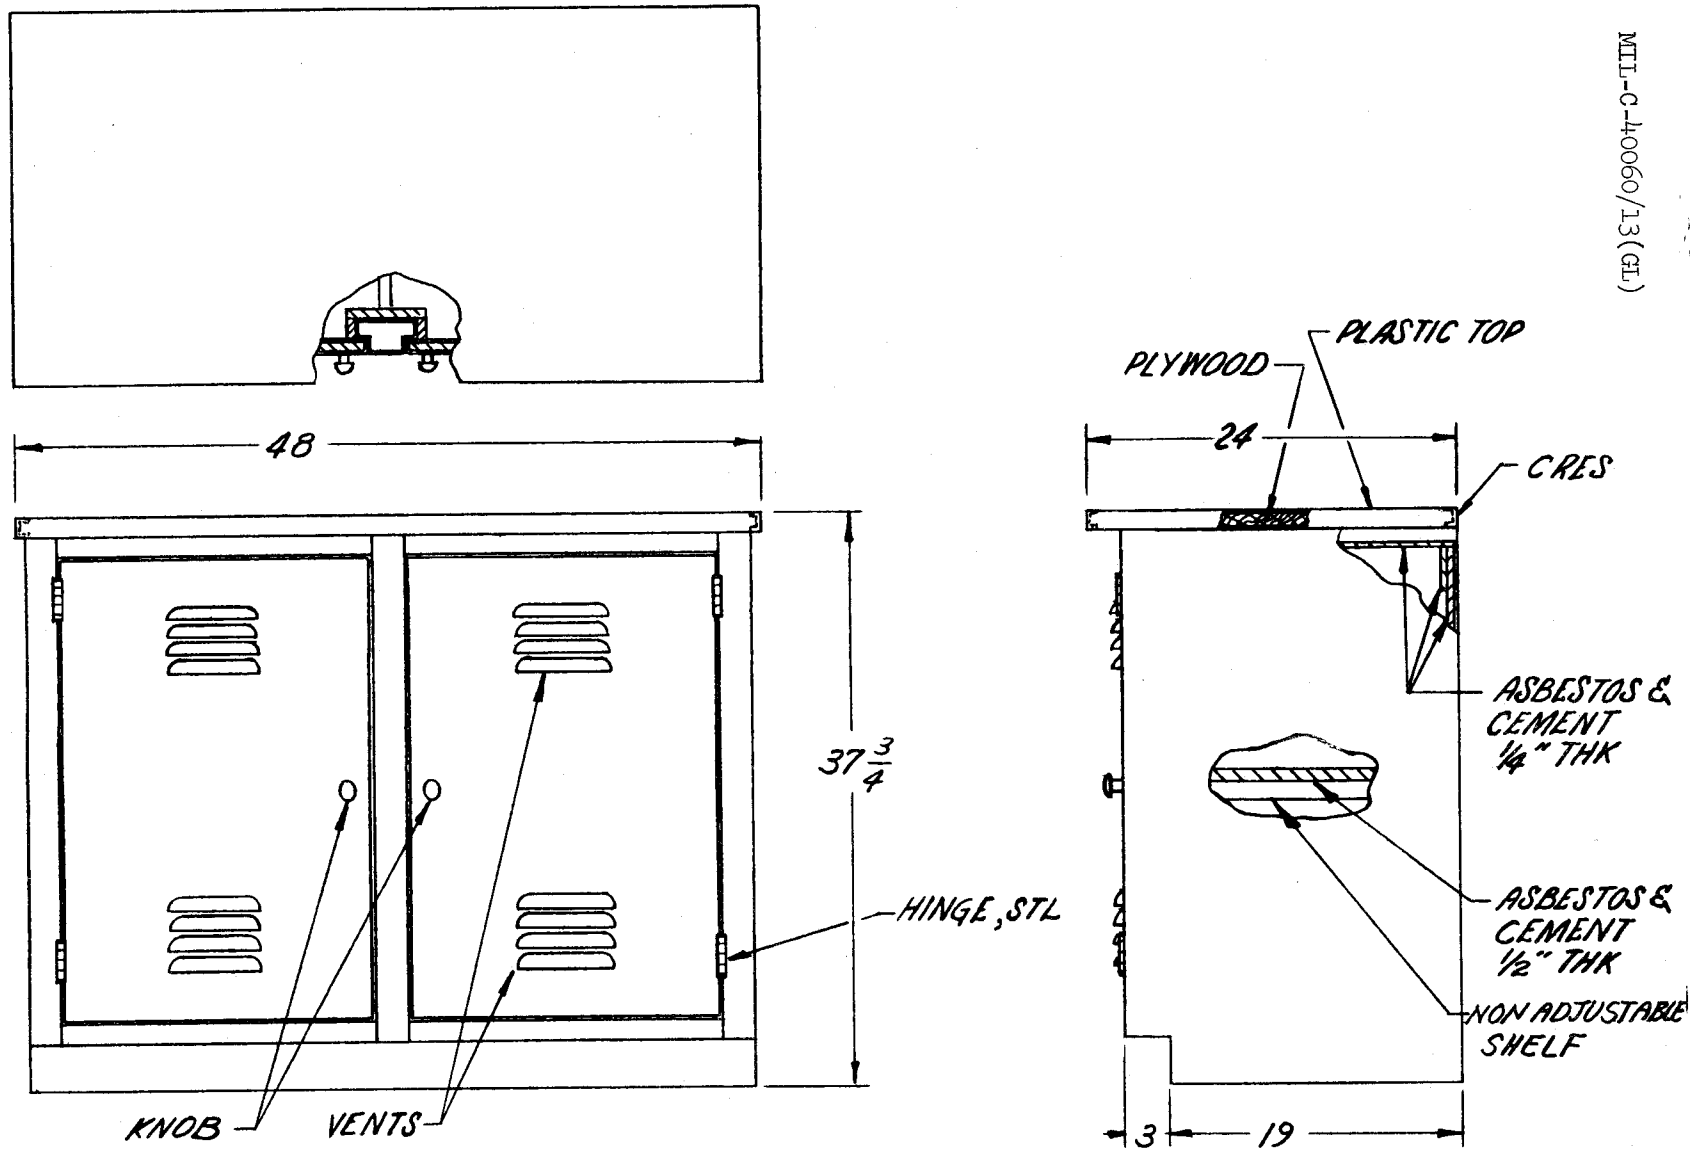


FIGURE 1 CABINET, STORAGE, STEEL, RECTIFIER, LABORATOR SUPPLIES; TYPE ~~XIII~~

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:09Z
Check the source to verify that this is the current version before use.