MILITARY SPECIFICATION SHEET

CABINET, STORAGE, STEEL: PHOTOLITHOGRAPHIC SUPPLIES, FLOOR, 1-DRAWER, 2-DOOR;

TYPE XVI

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown on figure 1.

COMPONENTS:

Drawer, drawer pulls, latches, doors, hinges, handle, cabinet lock, shelves, legs, footpads, cabinet top, and moulding shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

The cabinet shall be fabricated of 0.0478 inch thick, 18 gage steel, as specified throughout except that steel thickness for legs and footpads shall be in accordance with the manufacturers commercial practice. All joints shall be welded.

Footpads. The footpads shall be 2-3/4 inches by 2-1/2 inches key slotted, and shall be welded to leg bottoms.

Legs. The four legs shall be approximately 7-5/8 inches high from leg bottom to bottom of the cabinet and shall be riveted to the cabinet.

Drawers. The drawers shall be 6 inches high and a minimum of 28 inches wide by a minimum of 25 inches deep and shall each be equipped with two spring loaded positive latches which shall engage with the cabinet flanges. The drawers shall open only when latches are released. The latches shall keep the drawers closed, when tested as specified in MIL-C-40060. The front panels of the drawers shall be double thickness for added strength and to present an even interior surface.

Doors. One door shall be equipped with a dead bolt cabinet lock with locking handle.

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:10Z
Check the source to verify that this is the current version before use.

CONSTRUCTION: (cont'd)

Shelves. Two shelves (not illustrated), height adjustable at not more than [illegible], shall be provided [illegible].

Cabinet top. The cabinet top shall be fabricated of 3/4 inch thick plywood.

Moulding. The moulding fabricated of corrosion resisting steel shall be attached to plywood panhead tapping screws. The top of the moulding shall be flush with or slightly below the surface of the laminated decorative sheet.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

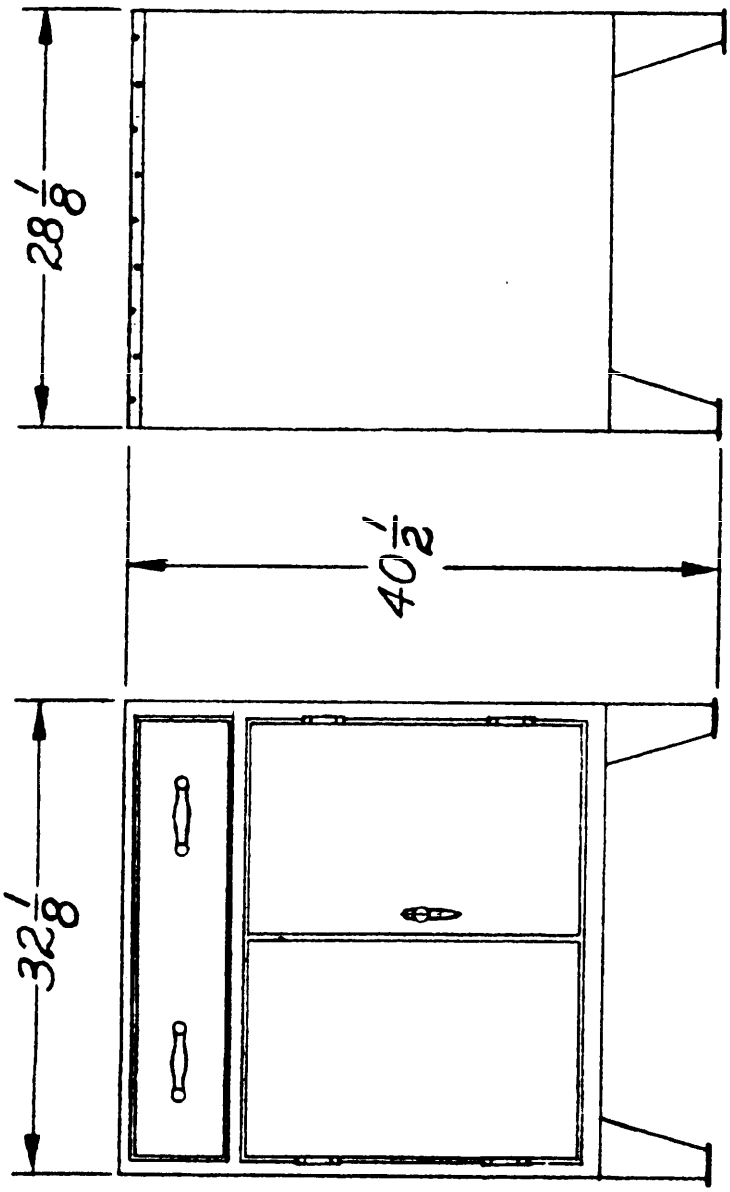


FIGURE 1. CABINET, STORAGE, STEEL, PHOTOLITHOGRAPHIC SUPPLIES, FLOOR, 1-DRAWER, 2-DOOR, TYPE VIII

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.