MIL-C-40060/17(GL)
30 December 1970

MILITARY SPECIFICATION SHEET

CABINET, STORAGE STEEL: LITHOGRAPHIC, COMBINATION STORAGE AND INSPECTION STAND; TYPE XVII

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown on figure 1.

COMPONENTS:

Doors, latches, hinges, drawers, drawer pulls, foot plate, trays, shelf bracket, glass, cabinet top, and bin shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

The cabinet shall be fabricated of .059 inch thick, 16 gage steel throughout. All joints shall be welded.

Footplates. The footplate shall be fabricated of 0.0747 inch thick, 14 gage steel. The foot plates shall be 2-1/2 inches by 2-1/2 inches and shall be key slotted. The foot plates shall be welded to the bottom of the cabinet at the four corners.

Doors. The doors shall be hinged with a continuous hinge having a brass pin, and shall be attached by welding or riveting. Bolts may be used if the bolt ends are peened. Doors shall have a positive, spring loaded latching mechanism. The lower right bin shall be divided in two sections one open and the other section provided with a spring loaded cover. The bins shall be removable to allow access to cabinet mounting bolts.

Drawers. The cabinet drawers as shown shall each be equipped with positive spring loaded catches, which shall engage the cabinet flanges. The latches shall keep the drawers closed, when tested as specified in MIL-C-40060. The front panel of the drawers shall be double thickness for added strength and to present an even interior surface. The top drawer shall be 4 inches high, by 13-1/4 inches wide, by 28 inches deep. The second top drawer shall be 5 inches high, by 13-1/4 inches wide, by 20 inches deep. The bottom drawer shall be 3-1/2 inches high, by 30-5/8 inches wide, by 28 inches deep.

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

CONSTRUCTION: (cont'd)

Trays: The cabinet shall have three plywood sliding trays 1/4 inch thick by 21-1/4 inches wide by 27-3/4 inches long located above the bottom drawer. The trays shall be inclosed in the front by a continuous hinged drop down drawer front.

Pulls. Each drawer and door shall be equipped with corrosion resistant plated drawer pulls. The pulls shall be attached by welding, riveting, or bolting. When bolts are used the bolts ends shall be peened.

Cabinet top. The cabinet top shall be fabricated of 3/4 inch plywood. When bolts are used to attach the cover, bolt ends shall be peened.

Moulding. The moulding fabricated of corrosion resisting steel shall be attached to plywood top with screws. The top of the moulding shall be flush with or slightly below the surface of the laminated decorative sheet. The front of the cabinet top shall have a raised strip to prevent articles from sliding off the sloping cabinet top.

Shelf. The cabinet shall have shelf fabricated of steel and welded to the cabinet side and supported by shelf brackets. One half the length of the shelf shall have a 1/2 inch thick removable glass plate held in place by metal clips. The remaining half of the shelf shall be fabricated of 1/2 inch plywood.

FINISH:

The cabinet shall be finished as specified, except for the cabinet top, the glass working surface, and sliding trays.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/17

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

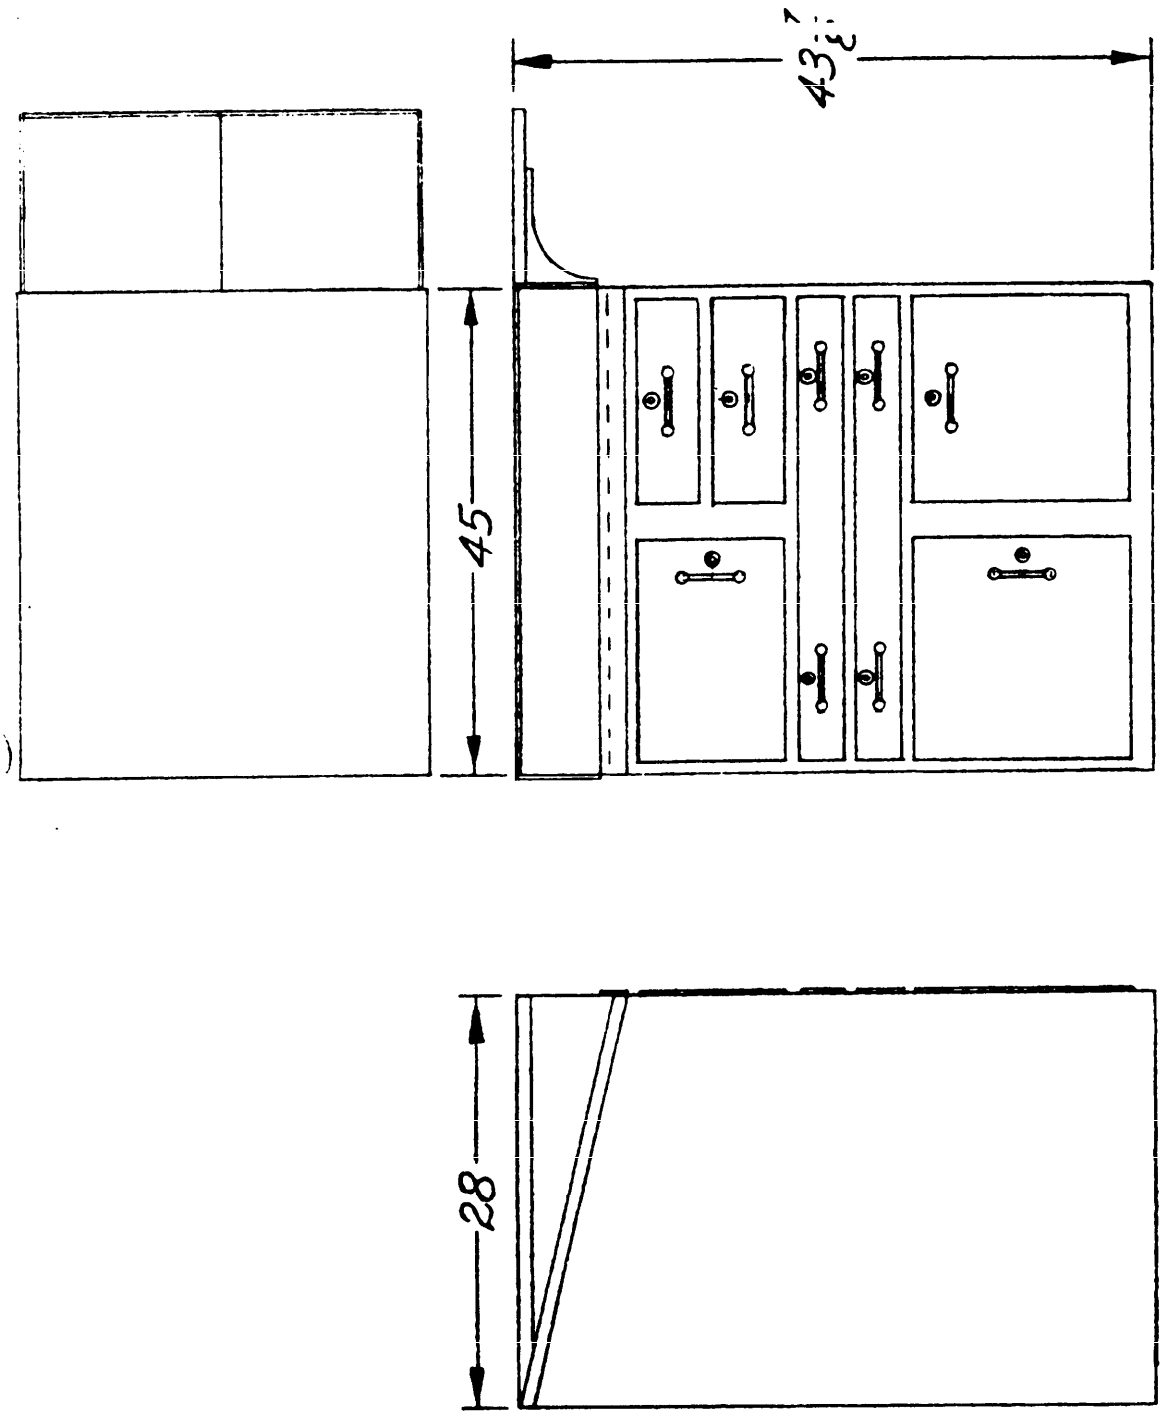


FIGURE 1. CABINET, STORAGE, STEEL, LITHOGRAPHIC COMBINATION STORAGE AND INSPECTION STAND, TYPE XIII

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.