MIL-C-40060/20(GL)

30 December 1970

MILITARY SPECIFICATION SHEET

CABINET, STORAGE STEEL: BOOKCASE, VEHICULAR MOUNTING, TYPE XX

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown on figure 1.

COMPONENTS:

Doors, knobs, hinges, shelves, and mounting strip, shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

Doors. Each door shall be supported by two flush hinges.

Knobs. The knobs on doors shall be corrosion resistant metal or of a material treated to resist corrosion. The knobs shall operate latching mechanisms.

Shelves. Three nonajustable and nonremovable shelves shall be provided. The bottom shelf shall be 12 inches from the cabinet bottom. The remaining shelves shall be equally spaced above.

Mounting strips. The mounting strips shall be fabricated of steel not less than 2 inches wide by .0359 inch thick and shall be welded to the inside back of cabinet. Keyhole slots as shown on figure 1 shall be punched or cut through back of cabinet and strips.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/20

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

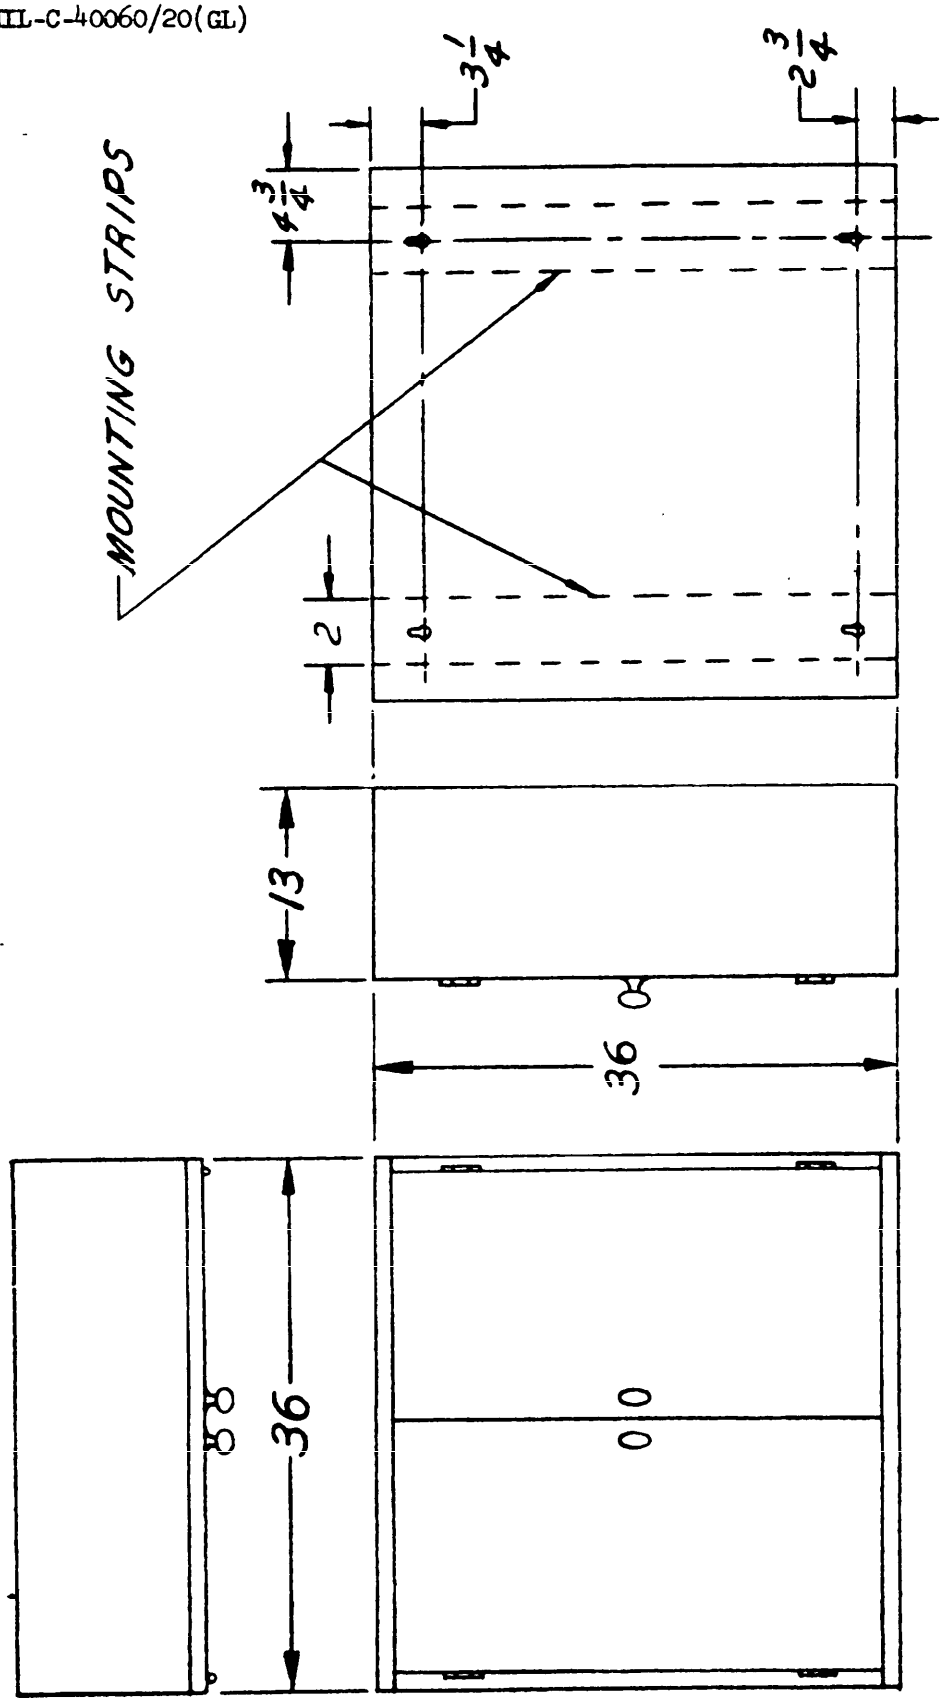


FIGURE 1 CABINET, STORAGE, STEEL, BOOKCASE, VEHICULAR MOUNTING; TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.