MILITARY SPECIFICATION SHEET

CABINET, STORAGE, STEEL: THREE PARTITIONS, VEHICULAR MOUNTING, (FOR SURVEYING EQUIPMENT); TYPE XXII

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown on figure 1.

COMPONENTS:

Doors, hinges, partitions, and angle iron mounting bracket shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

Doors. Each door shall be supported by two flush hinges. Knobs shall operate a latching mechanism which engage the top and bottom of the cabinet.

Partitions. The cabinet shall have three vertical partitions equally spaced extending the depth and height of the cabinet interior.

Angle iron. The angle iron mounting bracket shall be fabricated of steel 1-1/2 x 1-1/2 x 1/8 x 33 inches long, welded to the cabinet top and bottom as shown on figure 1.

Knobs. The knobs on doors shall be fabricated of corrosion resistant metal or of a material treated to resist corrosion.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/22

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:11Z
Check the source to verify that this is the current version before use.

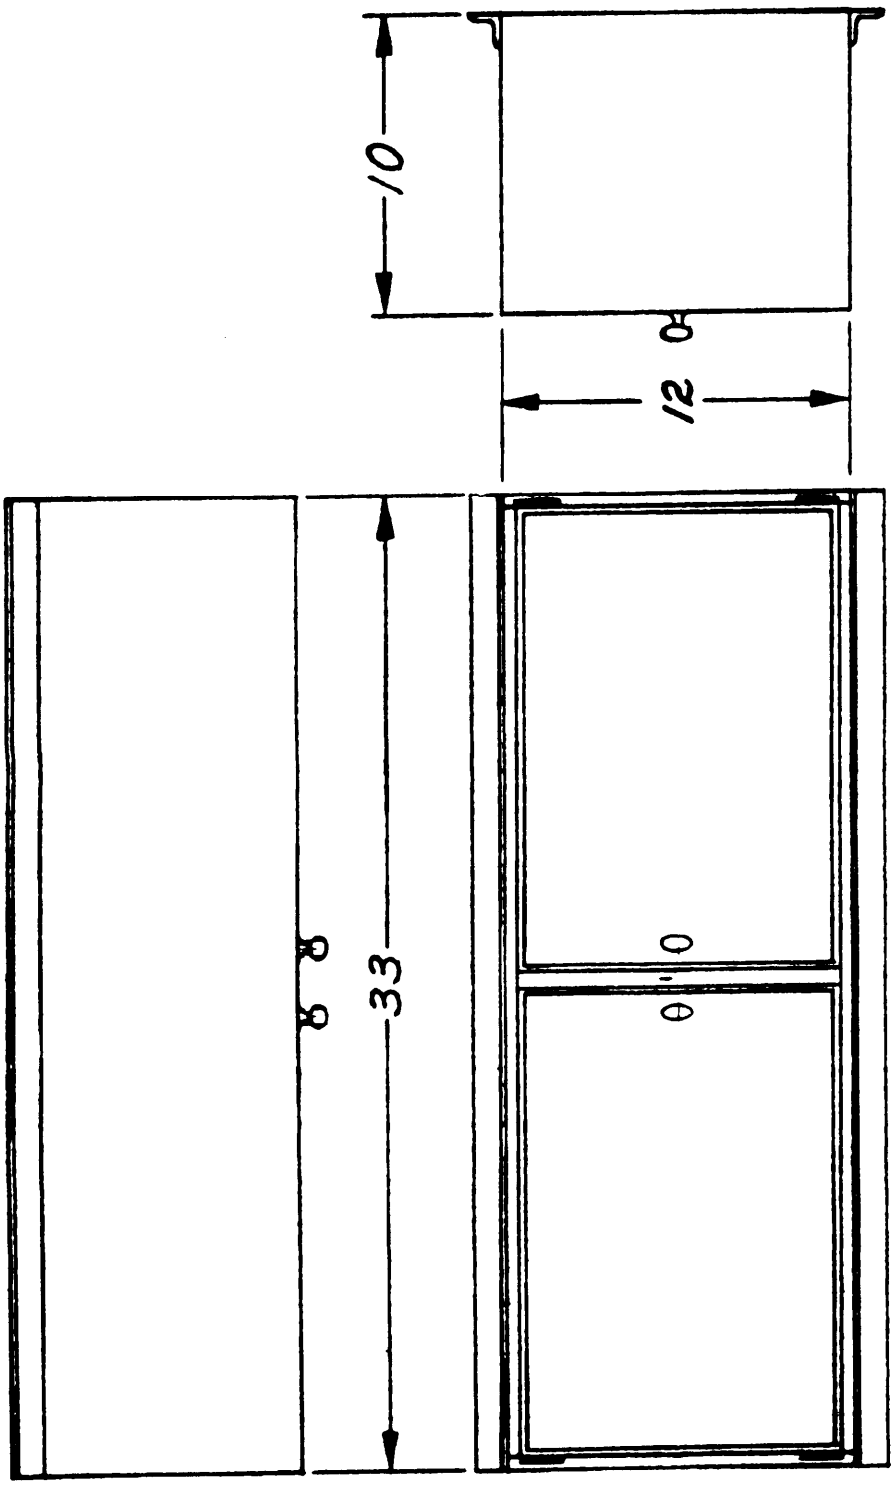


FIGURE 1 CABINET, STORAGE, STEEL, THREE PARTITIONS, VEHICULAR MOUNTING (FOR SURVEYING EQUIPMENT); TYPE XXII

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:11Z
Check the source to verify that this is the current version before use.