MILITARY SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPE 4D32

The complete requirements for procuring the electron tube described herein shall consist of this document and the issue in effect of Specification MIL-E-1.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

DESCRIPTION: Beam Power
See figure 1
Mounting position: Any
Weight: 7.5 oz nom.

ABSOLUTE RATINGS: F1 = 30 MHz

Parameter:	Ef	Eb	Ec1	Ec2	Ib
Unit:	V	Vdc	Vdc	Vdc	mAdc
Maximum:					
C Telep:	6.3 ±5%	600	-200	350	300
C Teleg:	6.3 ±5%	600	-200	350	300
AB2 Audio:	6.3 ±5%	600	----	300	375
TEST CONDITIONS:	6.3	600	----	300	---

ABSOLUTE RATINGS:

Parameter:	Pg1	Pg2	Pp	tk	Pi	Ehk
Unit:	W	W	W	sec	W	V
Maximum:						
C Telep:	0.75	10	50	120	150	+100
C Teleg:	0.75	14	50	120	150	±100
AB2 Audio:	0.75	8	50	120	150	±100
TEST CONDITIONS:	----	---	--	---	---	----

GENERAL

Qualification - Required

(B) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:46Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS Min	LIMITS Max	UNIT
	Quality conformance inspection, part 1							
(B) 1201	Short and discontinuity detection		0.4	II	---	---	---	---
1301	Heater current		0.65	II	If	3.35	4.15	A
1261	Electrode voltage (grid)	Ec1/Ib = 100 mAdc	0.65	II	Ec1	19	35	Vdc
1256	Electrode current (screen)	Ec1/Ib = 100 mAdc	0.65	II	Ic2	0	6	mAdc
1236	Power oscillation	Eb = 600V; Ec2 = 300 V; Ic1 = 10 mA; Rg = 5,000 ohms; F = 30 ±2 MHz; Ib = 250 mAdc (maximum)	0.65	II	Po	75	---	W useful
1231	Emission by oscillation		0.65	II	Ef	---	5.7	V
(B) 1336	Heater-cathode leakage		----	---	Ihk	---	250	µAdc
	Quality conformance inspection, part 2							
1031	Low-frequency vibration	Eb = 250 V; Ec2 = 150 V; Ec1/Ib = 10 mA; Rp = 2,000 ohms	---	---	Ep	---	4.12	V
(B) 1042	Shock specified pulse	Test Condition A	---	---	---	--	---	---
1331	Direct-interelectrode capacitance		---	Code E	Cgp Cin Cout	--- 22 10	0.40 30 16	pF pF pF
1316	Amplification factor	g1 to g2; Ec2 = 300 Vdc; Ic2 = 20 mA; t = 30 (max); anode grounded	---	---	Mu	5.0	15.0	
	Quality conformance inspection, part 3							
----	Life-test provisions	Group C; power oscillation; t = 500 hours	---	---	---	---	---	---
----	Life-test end points	Emission by oscillation	---	---	Ef	---	6.0	V

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:46Z
Check the source to verify that this is the current version before use.

Custodians:

Army - EL
Navy - EC
Air Force - 80

Review activities:

Air Force - 11, 17

User activities:


Army - MU
Navy - MC, AS, OS, SH
Air Force - None

Preparing activity:

Air Force - 80


(Project 5960-2454)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:46Z
Check the source to verify that this is the current version before use.

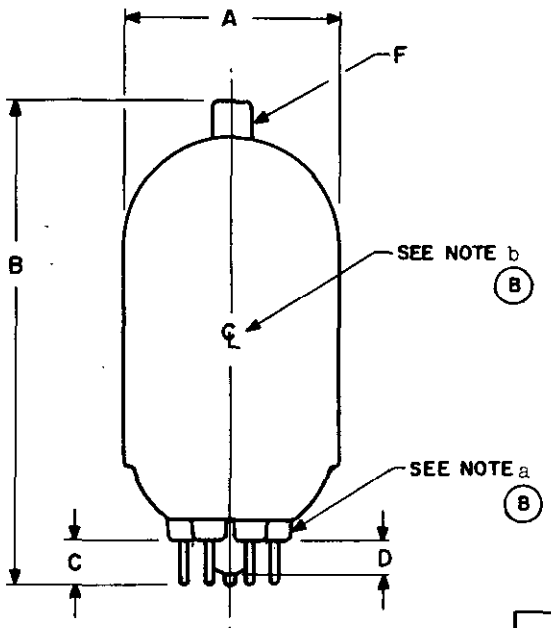

(B) PIN CONNECTIONS

PIN NO.	ELEMENT
1	h
2	g2
3	NC
4	k
5	k
6	g1
7	h
CAP	a

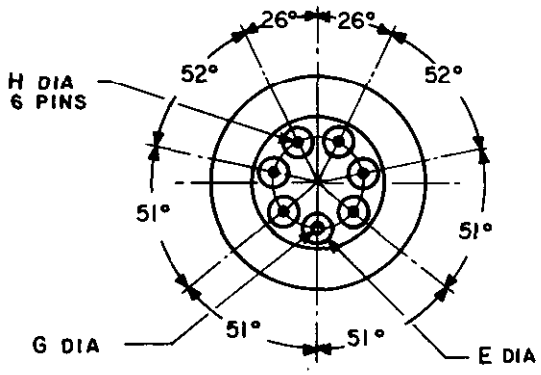

(B)

DIMENSIONS				
LTR	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
QUALITY CONFORMANCE INSPECTION, PART 2				
A	-	2.313	-	58.75
B	4.75	5.750	120.65	146.05
QUALITY CONFORMANCE INSPECTION, PT.3 (PERIODIC)				
C	.375	.500	9.53	12.70
D	-	.375	-	9.53
E	-	.375	-	9.53
G	.122	.128	3.10	3.25
H	.052	.060	1.32	1.52
F	CAP: C1-5			

NOTES: (B)

a. MEDIUM MOULDED FLARE SEPTAR 7 PIN BASE. BASE PIN POSITIONS SHALL BE HELD TO TOLERANCES SUCH THAT THE BASE SHALL FIT A FLAT PLATE GAGE HAVING A THICKNESS OF .375 (9.53 MM) AND SIX .0805 (2.04 MM) - .0795 (2.02 MM) AND ONE .1455 (3.70 MM) HOLES LOCATED ON A 1.0005 (25.41 MM) - .9995 (25.39MM) DIA CIRCLE AT SPECIFIED CENTERS. THE COMPLETE LENGTH OF THE PIN SHALL, WITHOUT UNDUE FORCE, PASS INTO AND DISENGAGE FROM THE GAGE. QUALITY CONFORMANCE INSPECTION, PART 2.

b. AXIS OF BASE PIN GAGE IS THE REFERENCE AXIS ℄ FOR TUBE SEATED FREELY IN GAGE.

FIGURE 1. Outline drawing of Electron Tube type 4D32

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-163/5588

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:46Z
Check the source to verify that this is the current version before use.