
[INCH-POUND]
F-F-351/7
May 15, 1998
SUPERSEDING
MS35802E
30 December 1993

FEDERAL SPECIFICATION SHEET

FILTER ELEMENTS, FLUID PRESSURE-OIL, FULL FLOW

The General Services Administration has authorized the use of this federal specification sheet by all federal agencies.

The complete requirements for procuring the oil filter described herein shall consist of this document and the latest issue of Federal Specification F-F-351/GEN.

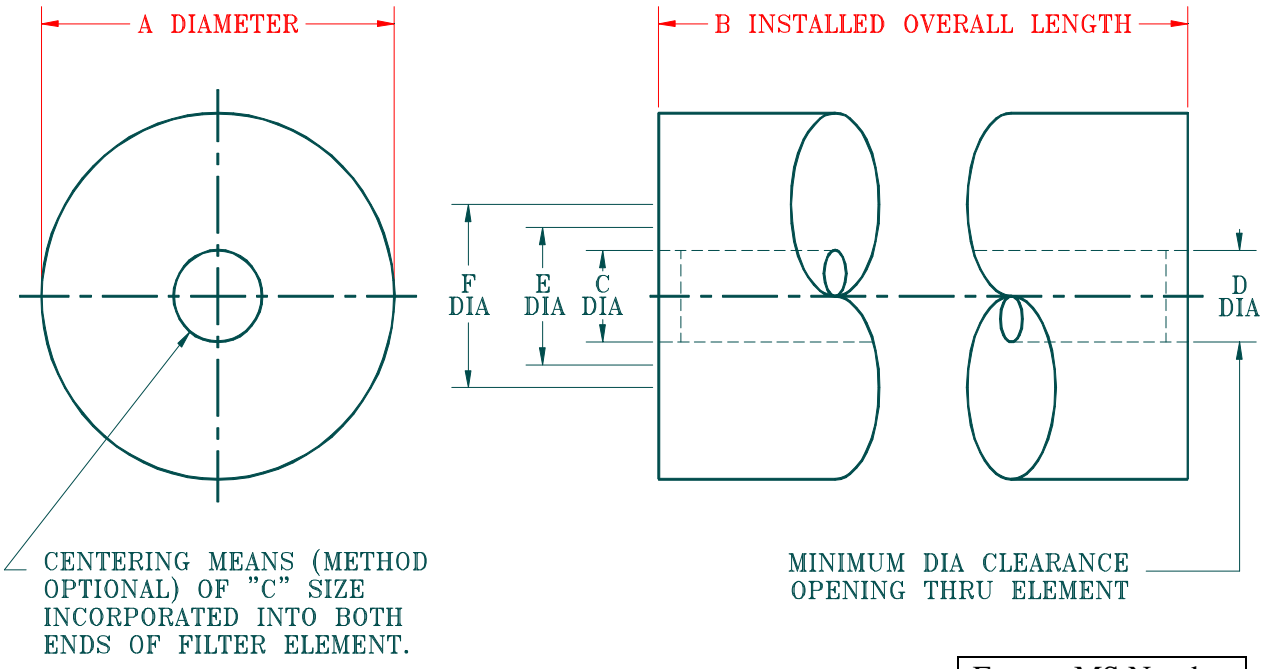

Former MS Number
MS35802

Figure 1. Filter element dimensions.

AMSC N/A FSC 2940

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:05Z
Check the source to verify that this is the current version before use.

Table I. Filter element dimensions.

PIN	CLASS	RATED FLOW FOR TEST PURPOSES (gal/min)	DIMENSIONS							
			A	B		C		D	E	F
			MAX	MAX	MIN	MAX	MIN	MIN	MAX	MIN
FF351/7-1	1	2.0	3.00	4.00	3.88	.80	.76	.80	1.00	2.00
FF351/7-2	2	6.0	4.00	4.88	4.75	.80	.76	.80	1.00	2.50
FF351/7-3	3	12.0	4.56	9.04	8.90	1.44	1.41	1.44	1.63	3.50
FF351/7-4	4	40.0	7.31	18.06	17.94	2.56	2.50	2.56	3.00	4.00

REQUIREMENTS

1. Type IV of procurement specification (oil filter elements, full flow).
2. Filter dimensions shall be as specified in table I.
3. Gasket dimensions shall be as specified in table II.

NOTES:

1. Sealing elements are of "E" inside diameter and "F" outside diameter. No part of the element protrudes axially beyond the effective sealing surfaces.
2. One each of the appropriate flat-type and trapped-type housing cover gaskets shall be packaged with each class 1, 2 or 3 element. Each element package shall include an instruction card as follows:
   a.) class 1 and 2 elements
   "Two housing gaskets (a flat and a trapped type) are provided. Use only the one gasket that is appropriate for the installation."
   b.) class 3 elements
   "Three housing gaskets (a flat and two trapped type with one each ID of 5.020-5.050 and 4.762-4.787) are provided. Use only the one gasket that is appropriate for the installation."
3. Gasket material for housing cover gaskets shall be as follows:
   a.) All flat type gaskets shall conform to ASTM D2000 , M3CH910A25B14E016E036.
   b.) All trapped type gaskets, except class 3, 5.020-5.050 ID shall conform to ATM D2000, M6BG910A14B14E014E034F17.
   c.) Trapped type gasket, class 3, 5.020-5.050 ID shall conform to ASTM D2000, M3CH614A25B34E016E036.
4. One each of oil filter cover bolt gasket (see page 4) shall be packaged with each class 1 element.
5. Oil filter bolt cover gasket as shown on page 4, shall conform to the following:
   a.) Gasket shall be annular in design, with a jacketed core.
   b.) Gasket jacket shall be constructed of copper, 0.010 ± 0.003 in., or of material with equivalent characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:05Z
Check the source to verify that this is the current version before use.

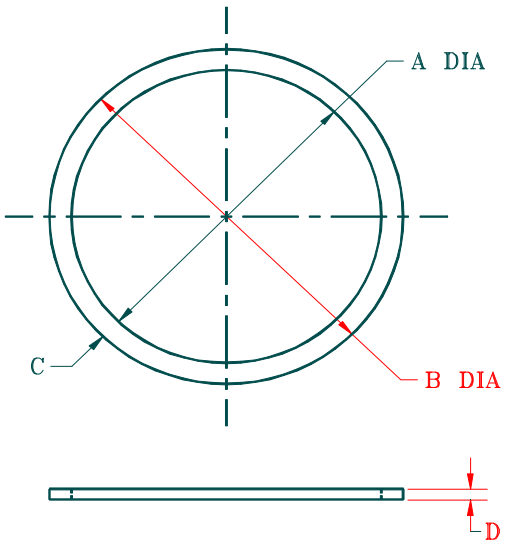


Figure 2. Housing cover gasket.

Table II. Housing cover gaskets for class 1, 2, and 3 full flow filter elements.

FOR ELEMENT CLASS	HOUSING COVER GASKET DIMENSIONS											
	FLAT TYPE						TRAPPED TYPE					
	A		B		D		A		C		D	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
1	3.26	3.24	3.74	3.73	0.083	0.063	3.317	3.307	0.140	0.130	0.133	0.117
2	4.40	4.39	4.96	4.95	0.065	0.055	4.320	4.280	0.105	0.095	0.141	0.109
*3	4.69	4.68	5.13	5.12	0.065	0.055	5.050	5.020	0.183	0.174	0.139	0.125
**							4.787	4.762	0.118	0.108	0.140	0.109

* See Note 2, page 2.

** The Class 3, trapped-type, 5.020 - 5.050 ID gasket must be used only in a completely captive type groove.

Notes: (Cont'd from page 2)

c.) Gasket core shall be composed of an asbestos-free largely inorganic fiber with filler, bound together with a suitable binder.

d.) The gasket shall be suitable for use in a temperature range of 150° to 500° F and pressures of up to 200 pounds per square inch (psi).

e.) The loss in weight of the filler core shall not be more than 30 per cent when subjected to 600 ± 16 °F for 60 ± 5 minutes as tested per ASTM F495.

6. Unless otherwise specified, dimensions are in inches.
7. This specification sheet is not intended to limit construction to features other than as shown hereon by dimensions, notations or referenced documents.
8. For design feature purposes, this specification slash sheet takes precedence over procurement documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:05Z
Check the source to verify that this is the current version before use.

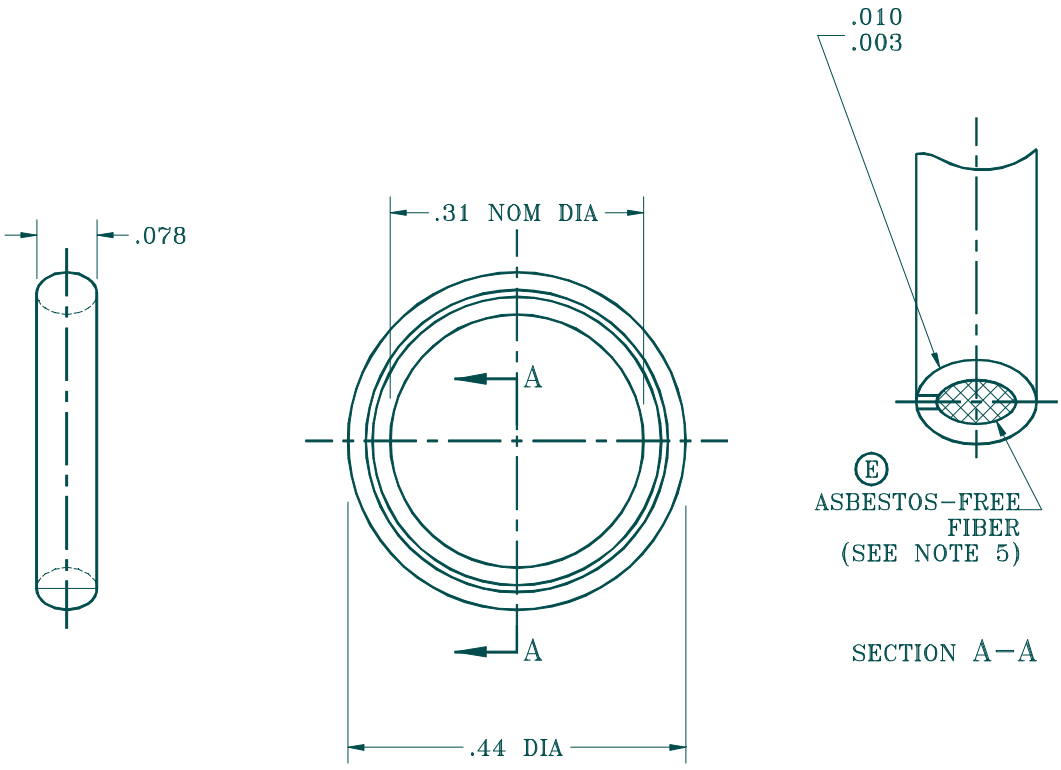


Figure 3. Oil filter cover gasket bolt.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
Air Force - 99

Review Activities:
Navy - MC, YD1
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 2940-0173)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:05Z
Check the source to verify that this is the current version before use.