INCH-POUND

MIL-C-18757/4C(OS)
24 January 1994
SUPERSEDING
MIL-C-18757/4B(OS)
9 April 1993

MILITARY SPECIFICATION

CARTRIDGE CASE, STEEL, 5-INCH, MARK 9 MODS 0 AND 1 (54 CALIBER)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the 5"/54 Caliber Mk 9 Mod 0 and Mod 1 Steel Cartridge Case, herein referred to as the "cartridge case."

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-T-60	Tape, Packaging, Waterproof
PPP-T-70	Tape, Packaging, Plastic Film

MILITARY

MIL-B-117	Bags, Sleeves and Tubing
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-C-18757	Cartridge Cases, Steel (Other Than Small Arms), General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Branch (Code 8420), 101 Strauss Avenue, Indian Head, MD 20640-5035 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or sending a letter.

AMSC N/A FSC 1395

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

DOD-STD-2101 Classification of Characteristics

(Unless otherwise indicated, copies of federal and military specifications and standards are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

Naval Sea Systems Command (CAGE Codes 10001 and 53711)

444048	5"/54 Caliber Body Gage Assembly, Receiver
517536	5-Inch Cartridge Case Mk 9 Mod 0 (54 Caliber) Steel
2847224	Case, Cartridge, Mk 9 Mod 1, 5"/54 Caliber, Steel
3208375	5"/54 Caliber, Full Propelling Charge

(Application for copies should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Attn: Data Control Branch (Code 8410), Indian Head, MD 20640-5035.)

PUBLICATIONS

Naval Sea Systems Command (CAGE Code 10001)

OD 47471	Method for Rating the Effects of Salt Spray Testing on Zinc Electroplated Cartridge Cases

(Application for copies should be addressed to: Commander, Port Hueneme Division, Naval Surface Warfare Center, NAVSEA Data Support Activity (Code 5H30), Port Hueneme, CA 93043.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B633	Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel (DOD adopted)
ASTM E8	Tension Testing of Metallic Materials, Standard Test Methods of (DOD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of Precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.4.

3.2 Characteristics. Unless otherwise specified in the contract or purchase order (see 6.2), the cartridge case shall conform to the requirements specified herein and on Drawings 517536 and 2847224. The general requirements of MIL-C-18757 shall also apply.

3.3 High-stress expansion (M101). The cartridge case shall show no evidence of cracks in any portion of the case when subjected to the high-stress expansion test of 4.6.2.


3.4 Hardness (M102). The hardness value for region D of figure 1 shall be as specified in table I. Values for regions A_1, A_2, B, and C, as shown in figures 1 and 2, are advisory (see 4.6.3).

TABLE I. Hardness values.[1]

Region A_1		Region A_2		Region B		Region C		Region D	
Max[2]	Min	Max[2]	Min	Max[2]	Min	Max[2]	Min	Max[2]	Min
42C	75B	42C	90B	42C	34C	42C	95B	85B	—

[1] All hardness values given in Rockwell "C" or "B" scale.
[2] Stress Relief and Hydrogen Embrittlement Relief of ASTM B633 do not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

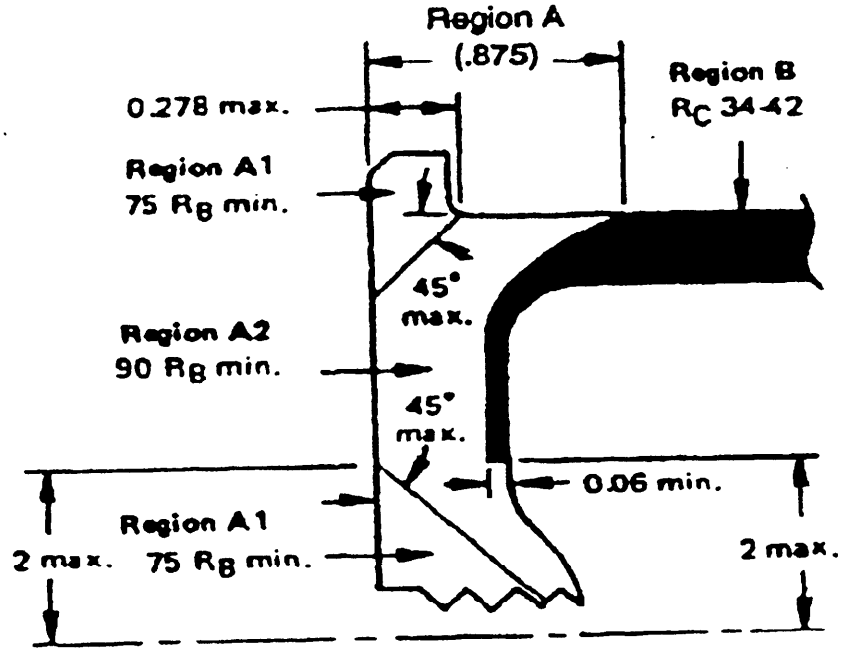

Section A-A

Unless otherwise specified all dimensions are in inches.

FIGURE 1. Hardness specimen locations.

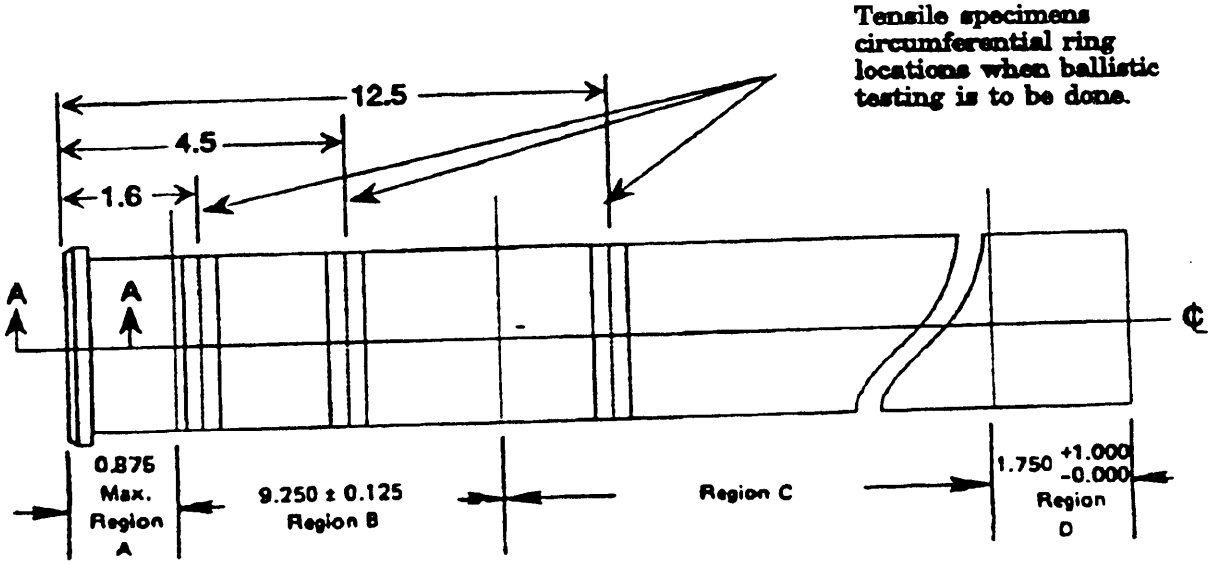


FIGURE 2. Tensile specimen locations and region D hardness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

3.5 Tensile strength and elongation (M103). The yield strength and elongation values for the cartridge case, when a ballistic test is required for lot acceptance, shall be as specified in table II in the regions shown in figure 2 (see 4.6.4 and 4.6.5).

TABLE II. Tensile strength and elongation.

Region	Yield Strength at 2% Offset, (psi)	Elongation (1" gage length)
B	135,000 min	6% min
C	90,000 min	5% min

3.6 Protective coating (M104). The cartridge case protective coating shall have a rating of the black corrosion products of zinc less than the established standard of 0.24000 (see 4.6.6).

3.7 Chamber gage (M105). Each cartridge case shall fully chamber in a Navy approved chamber gage (see 4.6.7).

3.8 Ballistic. Each cartridge case shall load, eject, show no splits, and otherwise perform satisfactorily when ballistically tested (see 4.6.8).

3.9 Mechanical properties (tensile). When lot acceptance is to be based on mechanical properties, in lieu of ballistic testing, the yield strength statistical parameters, both base and sidewall areas, ($\bar{x}$ = mean, s = standard deviation), when plotted on figures 3 and 4, must be on the k_{min} line or within the designated acceptable area (see 6.4). The one-sided tolerance limit factor (k) for the base area, when calculated, must be equal to or greater than 2.376; for the sidewall area (k_1) it must be equal to or greater than 2.823. Test samples must be equal to or greater than 2.823. Test samples distribution shall be as specified in table III. Each test activity's (Government and contractor) test data shall be compared separately against the final acceptance requirements (see 4.6.9). (The value for k_{min} was determined using population statistical parameters μ, σ, η, γ - see figures 3 and 4).

3.10 Workmanship. Workmanship shall be as specified in MIL-C-18757 (see 4.6.1).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

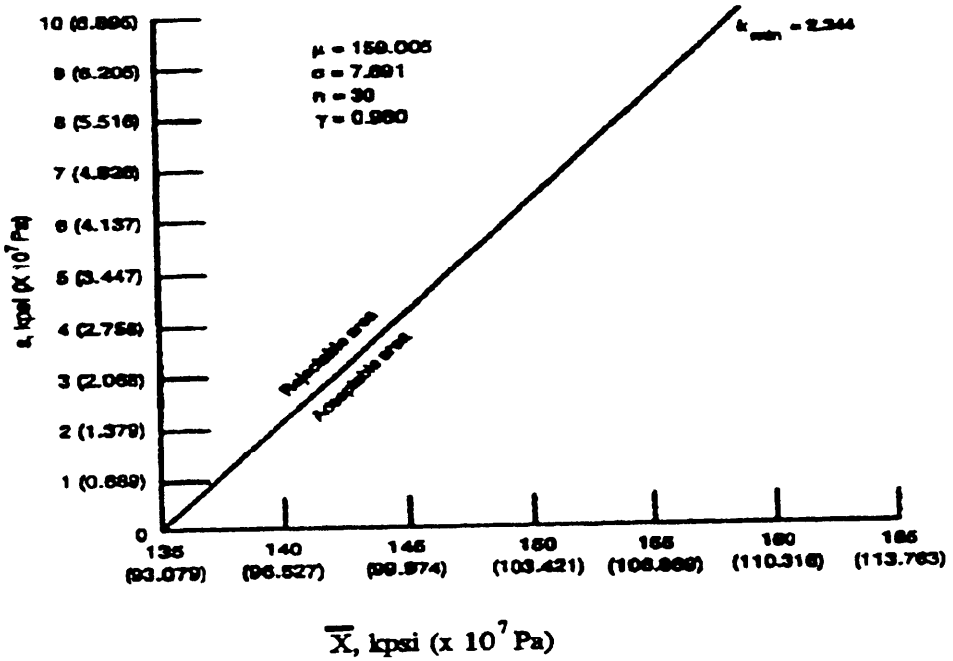


FIGURE 3. Final acceptance chart (base area).

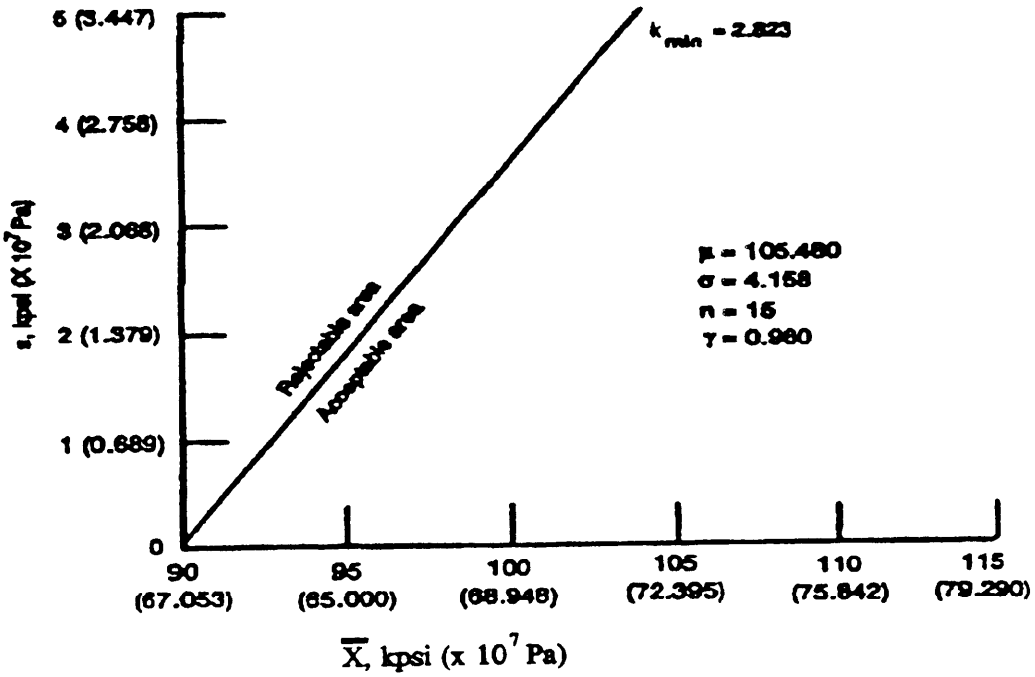


FIGURE 4. Final acceptance chart (sidewall area).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)
b. Quality conformance inspection (see 4.5)

4.3 Classification of characteristics. The requirements verified by the tests and examinations specified herein are classified as critical, major or minor in accordance with DOD-STD-2101. Tests and examinations that verify critical characteristics are identified by the symbol (C), and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of the characteristics. Requirements not annotated with a classification code are classified as minor.

4.4 First article inspection. The first article sample shall consist of 158 cartridge cases and shall be examined and tested in accordance with table I "First article and quality conformance inspection and sampling" of MIL-C-18757. The cartridge cases shall be the same as for regular production and manufactured under the same conditions as the production lot. Further production of cartridge cases by the contractor prior to the approval of the first article shall be at the contractor's risk.

4.4.1 First article sample acceptance/rejection. Acceptance or rejection of the first article sample shall be in accordance with table I "First article and quality conformance inspection and sampling" of MIL-C-18757. For those where the acceptance criteria is not shown, any failure to meet the requirements shall be cause for rejection of the sample.

4.4.2 Cases remaining after testing. Those cases in the test sample that remain intact after testing is completed shall be disposed of as directed by the contracting activity.

4.5 Quality conformance inspection. Quality conformance inspection shall consist of examinations and tests as specified in table I "First article and quality conformance inspection and sampling" of MIL-C-18757. Final acceptance test shall either be by mechanical properties (tensile, see 4.6.9) or by ballistic (see 4.6.8) as specified in the contract or purchase order (see 6.2).

4.5.1 Lot size. Unless otherwise specified in the contract or purchase order (see 6.2), the production lot shall consist of 10,000 cartridge cases plus those required for test purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

TABLE III. Specimen test matrix.

Sample Number	Base Locations					Sidewall Locations		
	A	B	C	G	K	D	E	J
1	A	B				D		
2	A	B					E	
3	A	B						J
4	A		C			D		
5	A		C				E	
6	A		C					J
7	A				K	D		
8	A			G			E	
9	A			G				J
10	A			G		D		
11	A				K		E	
12	A				K			J
13				G	K	D		
14		B			K		E	
15		B	C					J
16		B	C			D		
17		B	C				E	
18		B		G				J
19		B		G		D		
20		B		G			E	
21		B			K			J
22		B			K	D		
23				G	K		E	
24			C		K			J
25			C	G		D		
26			C	G			E	
27			C	G				J
28			C		K	D		
29			C		K		E	
30				G	K			J
Total	12	12	12	12	12	10	10	10

Notes: 1. Odd numbered samples are to be tested by contractor and the even numbered samples to be tested by designated Government test activity.

2. Samples must be randomly selected from submitted lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

4.6 Methods of inspection.

4.6.1 Visual and dimensional examination. The cases shall be visually and dimensionally examined for conformance to requirements of 3.2 and 3.10. Four power (4x) magnification may be used for examination of defects.

4.6.2 High-stress expansion test. Each cartridge case in the lot (see 4.5.1), after heat treatment but prior to tapering, shall be subjected to a high-stress expansion test. The cartridge case shall be expanded diametrically 0.050 inch minimum while under pressure, in a zone extending from 1.5 inches above the flange to 9 inches above the flange. Expansion will decrease as the flange is approached with expansion at the flange to be zero.

4.6.3 Hardness. Hardness testing shall be as specified in MIL-C-18757. Hardness readings shall be taken on each of two sections cut longitudinally from diametrically opposite quadrants of each cartridge case.

4.6.4 Elongation test. Circumferential specimens cut from three positions shown in figure 2, where acceptance is to include ballistics, or eight positions as shown in figure 5 where acceptance is to be by mechanical properties, shall be tested for elongation in accordance with MIL-C-18757.

4.6.5 Tension test. Circumferential specimens, cut from three positions shown in figure 2, where acceptance is to be by ballistics, or eight positions as shown in figure 5, where acceptance is to be by mechanical properties, shall be tested for yield strength in accordance with ASTM E8. An offset value of 0.002 inch per inch length shall be used to determine yield strength.

4.6.6 Protective coating test. Cartridge cases shall be prepared and tested in accordance with the protective coating test of MIL-C-18757. The presence of white corrosion products will be permissible to the extent that it does not interfere with chambering of the cartridge case. The black speck corrosion rating procedure shall be as specified in OD 47471.

4.6.7 Chamber gage examination. Each cartridge case shall be chamber-gaged in receiver, Drawing 444048, to determine conformance to 3.7. A gage removal force of 59 pounds maximum is permitted.

4.6.8 Acceptance using ballistic test. The cartridge cases shall be loaded in accordance with Drawing 3208375. The propellant charge shall be adjusted so that the ballistic test pressure at any temperature is as follows:

Service rounds 19.5 to 21.5 tsi-copper
Proof rounds 22.5 to 24.5 tsi-copper

Testing shall be performed in a 5"/54 gun mount and in quantities specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

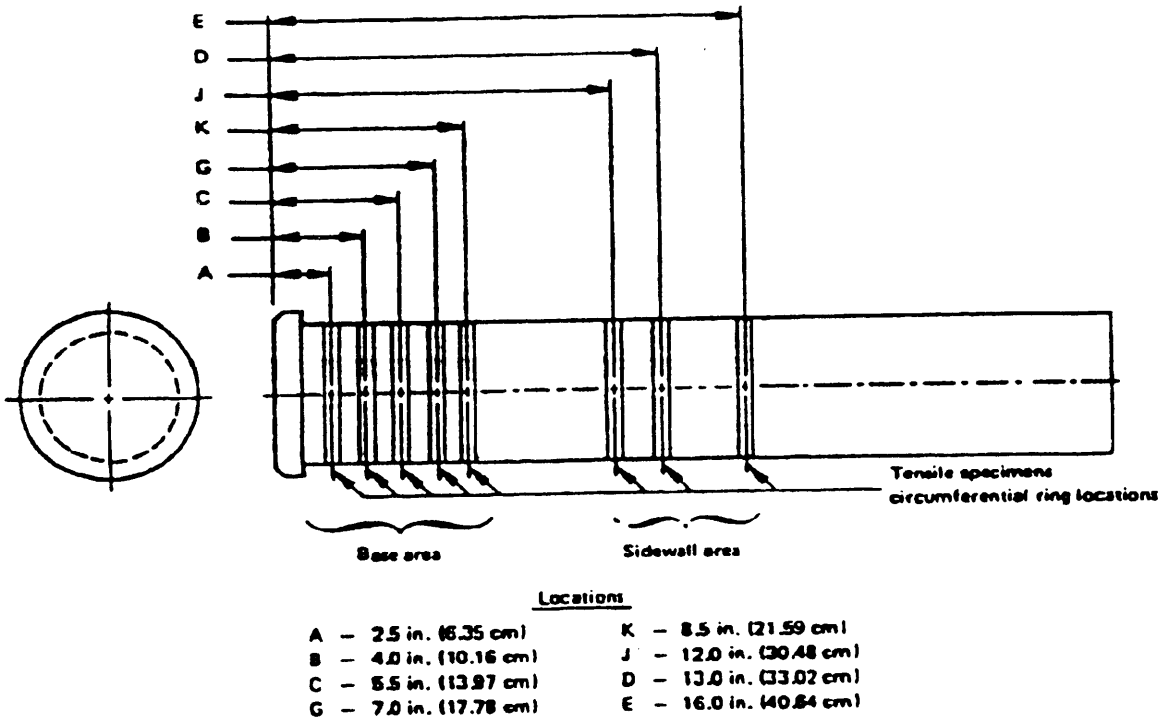


FIGURE 5. Specimen location when acceptance is by mechanical properties.

TABLE IV. Ballistic acceptance.

Type of Lot	Number of Rounds	Type of Round	Round temperature (°C)
First article	70	Service	32
	30	Proof	32
	25	Service	49
	25	Service	−7
Production	40[1]	Service	32
	10[1]	Proof	32

[1] After firing, cases shall be rechambered in a chamber gage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

4.6.8.1 Test procedure. All proof pressure rounds and five service rounds at each temperature, all containing copper crusher gages, shall be fired in the single shot mode to determine compliance with the pressure requirements. The remainder of the cartridges shall be fired in the automatic mode. Temperature of the rounds shall be as specified in table IV. Rounds shall be temperature conditioned for a minimum of 24 hours.

4.6.9 Acceptance using mechanical properties (tensile).

4.6.9.1 Specimen preparation. Cut and identify circumferential rings from 30 cases (per lot) in accordance with specimen location sketch (figure 4) and matrix (table III). Maintain ring widths slightly greater than the final specimen grip width to allow for subsequent shaping operations. Prior to cutting the rings, specimen segments A, B, and C will require surface machining (both inside and outside surfaces) to produce parallel specimen face surfaces (nominal thickness to be between 0.060 and 0.080 inches). Specimen ring segments G, K, J, D, and E will not require surface machining prior to ring cutting. Cut the rings in half, each half to have identical identification. Retain one set of ring segments for possible retest. Remove edge burrs and sand edges slightly to remove any possible stress raises. Straighten specimens by passing them through a sheet metal roller, using a minimum of passes until bowing cannot be detected with a straight edge. Machine all specimen segments to dimensions specified in figure 6 of ASTM E8 subsize specimens. Several specimens may be machined at one time. Individually, sand the edges of the gage section to obtain a 0.003 to 0.005 inch taper from the end to the middle of the gage section. Smooth all edges of the necked down area. Stress relieve all segments at 321 ± 5.5°C for 30 ± 5 minutes and then cool to room temperature for a minimum of 1 hour.

4.6.9.2 Specimen testing. Perform hardness tests on all specimens by taking measurements in the specimen grip area or adjacent to the grip area away from the neck-down area. Record all measurements. Perform hardness tests in accordance with MIL-C-18757. Perform tensile and elongation tests on all specimens in accordance with MIL-C-18757. Test all tensile specimens using a head separation rate of 0.05 inches per minute. Retain original stress-strain curves. Note magnification and scale on all stress-strain curves. Measure gage dimensions as accurately as possible. Record gage cross-sectional area to four decimal places.

4.6.9.3 Acceptance procedure.

4.6.9.3.1 Lot mean. Determine lot mean (both areas) of yield strength test values using mean equation $\bar{X} = \Sigma X/n$, where X = test value and n = sample size.

4.6.9.3.2 Lot standard deviation. Determine lot standard deviations (both areas) of yield strength test values using the following standard deviation equation:

$$s = \left[\frac{n\Sigma x^2 - (\Sigma X)^2}{n\,(n-1)}\right]^{\frac{1}{2}}$$

4.6.9.3.3 Plotting. Plot sample $\bar{X}$ and s on yield strength final acceptance charts (figures 3 and 4) or calculate lot k value from the equation $k = (\bar{X} - X_L)/s$, where $\bar{X}$ = lot mean, X_L = lower limit yield value (base = 135,000 psi, sidewall = 90,000 psi), s = lot standard deviation, and k = one-sided tolerance limit factor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

4.7 Inspection of packaging. Packing and marking shall be visually examined for conformance to section 5.

5. PACKAGING

5.1 Packing. Packing shall be in accordance with MIL-C-18757, with four cases packed in each box.

a. Box dimensions shall be 12 11/16 by 12 11/16 by 33 1/8 inches.

b. Partition dimensions shall be 37 7/8 by 12 5/8 inches, two required per container, one center slotted 15 13/16 inches for assembly, two fold-out flaps 6 5/16 inches per partition for bottom pad.

c. Top pad dimensions shall be 15 9/16 by 12 9/16 inches with 1 1/2 inch flange with four holes 5 3/4 inches in diameter.

NOTE: Tolerances for all packing dimensions shall be ± 1/32 inch.

d. Each case is to be packaged in a plastic bag in accordance with MIL-B-117, Type III, Class E, Style 1. Approximate bag size is 11 1/2" by 43". Insert a one unit bag of desiccant, MIL-D-3464, Type I, and seal plastic bag with tape, PPP-T-70 (PPP-T-60 may be used as an alternative). A strip of tape is to be placed around the bag over the flange area so the bag is snug against the flange. Placing the tape around the bag in the flange area will reduce the movement of the flange within the bag and will also provide backup material to the bag to keep it from being cut.

5.2 Palletizing. Cases packed in boxes shall be palletized in accordance with standard commercial practice.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2), all marking shall be in accordance with MIL-C-18757 including an arrow stenciled on each container to indicate the top or mouth end of cases.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory)

6.1 Intended use. The 5"/54 Caliber, Mk 9 Mods 0 and 1, Cartridge Cases, when assembled with their appropriate primers, propellant charges, and plugs, and when used with their appropriate loaded projectiles, form complete rounds which are used as service ammunition in the 5"/54 caliber gun.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. If a first article sample is required (see 3.1).

d. If cartridge case chacteristics are different than specified in 3.2.

e. Activity responsible for inspection if other than as specified (see 4.1).

f. Whether acceptance is to be based on ballistic test or mechanical properties (tensile) test (see 4.5).

g. Production lot size, if other than as specified in 4.5.1.

h. If acceptance is to include mechanical properties test (see 4.6.9), the Government activity that will perform the tests on the even numbered specimens from table III.

i. That the safety precaution requirements of the "Contractors' Safety Manual for Ammunition, Explosives and Related Dangerous Material," DOD 4145.26M are applicable (see 6.5).

6.3 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in 4.4. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to reply on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate unless specifically requested to do so in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

6.4 Statistical glossary.

- k One sided tolerance limit factor
- n Sample size
- s Sample standard deviation
- X Test value
- $\bar{X}$ Sample mean (average)
- X_L Minimum yield strength
- γ Confidence level
- μ Population mean
- σ Population standard deviation
- Σ Summation

6.5 Safety precautions. The safety precaution requirements of the "Contractor's Safety Manual for Ammunition, Explosives and Related Dangerous Material" (DOD 4145.26M) are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23-3. NOTE: When this document is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore" (OP5) should be made applicable.

6.6 Subject term (key word) listing.

Ballistic cases
Chamber gage

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity:
Navy - OS
(Project 1395-N269)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-18757/4C(OS)	2. DOCUMENT DATE (YYMMDD) 1994 JANUARY 24

3. DOCUMENT TITLE
CARTRIDGE CASE, STEEL, 5-INCH, MARK 9 MODS 0 AND 1 (54 CALIBER)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, INDIAN HEAD DIVISION NAVAL SURFACE WARFARE CENTER (CODE 8420)	b. TELEPHONE (Include Area Code) (1) Commercial: 301-743-4510/4253 (2) AUTOVON: 354-4510/4253
c. ADDRESS (Include Zip Code) 101 STRAUSS AVENUE INDIAN HEAD, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026/10-10T11:54Z
Check the source to verify that this is the correct version before use.