MILITARY SPECIFICATION

PRIMER, ELECTRIC, MARK 48 MOD 2

This amendment forms a part of Military Specification MIL-P-18716B (OS), dated 7 February 1977.

PAGE 3

Delete FIGURE 1 and substitute the following FIGURE 1:

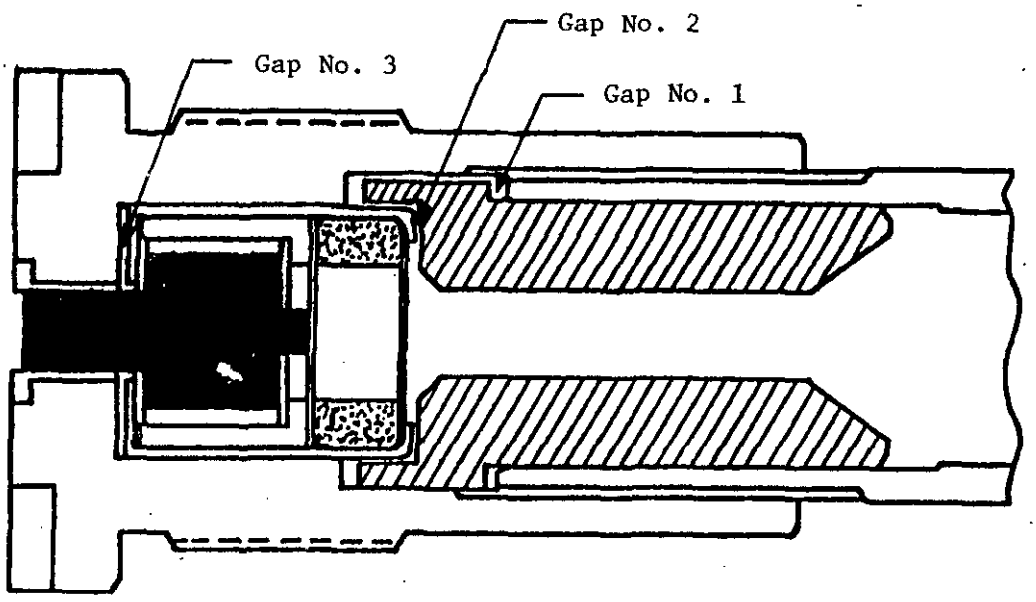


FIGURE 1. Gap identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:51Z
Check the source to verify that this is the current version before use.

PAGE 8

4.6.6 Delete in its entirety and substitute:

"4.6.6 Ballistic. The primer shall be assembled into 5"/38 caliber full service propelling charge assembly in accordance with drawing 2847233. All components shall be of service acceptable lots. The propellant shall be conditioned at 90°F ± 15°F for 24 hours minimum prior to assembly of the propelling charge. All other components shall be conditioned at 85°F ± 20°F for 24 hours minimum prior to assembly of the propelling charge. The assembled propelling charge shall be conditioned at 90°F ± 5°F for 48 hours minimum immediately prior to firing. Serviceable blind, loading, and plugged projectiles shall be used. The rounds shall be fired in 5"/38 electrically fired gun with a first quarter life barrel. Initial projectile muzzle velocity, projectile ejection time, and peak pressure at the base of the cartridge case shall be recorded. Initial velocity standard deviation, s, shall be calculated as follows:

$$s = \sqrt{\frac{\Sigma (X - \bar{X})^2}{N - 1}}$$

where: s = initial velocity standard deviation, ft/sec
X = velocity of each firing, ft/sec
N = number of firings and
$\bar{X}$ = mean velocity = $\frac{\Sigma X}{N}$, ft/sec"

PAGE 10

6.5.3 Delete in its entirety.

Preparing Activity:
Navy - OS

Project No. 1390-N207

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:51Z
Check the source to verify that this is the current version before use.