FED. SUP CLASS
2240

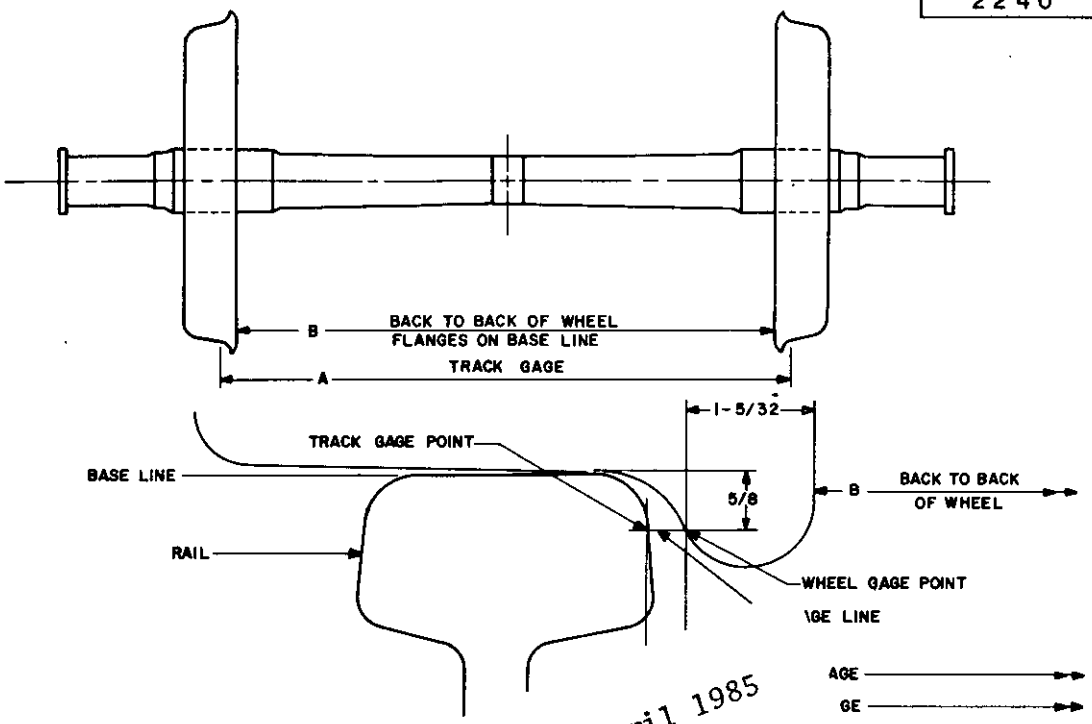

CANCELLED AFTER 17 April 1985
NO SUPERSEDING STANDARD.

TA[illegible]

A Incl		
39-3/		
56-1/2		21/64
60	-/16 +1/16 -0	1/2
63	60 +1/16 -0	11/32
66	63 +1/16 -0	11/32

[illegible] II.

Wheel mounting pressure for multiple gage axles		
Wheel Seat Diameter Inches	Service Foreign Tons	
5-3/4	Minimum Maximum	55 80
7	Minimum Maximum	75 110
7-9/16 7-5/8	Minimum Maximum	80 120
8-1/8 8-1/4	Minimum Maximum	85 130
8-3/4	Minimum Maximum	90 140

Ⓑ

NOTES:

1. All dimensions are in inches
2. No tolerances permitted below minimum or above maximum pressure shown in TABLE II.

Ⓑ Denotes changes

APPROVED 21 Aug 61 REVISED Ⓐ 7 Oct 66 Ⓑ 1 SEP 76 Ⓒ 17 April 1985

Review activity:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ME Other Cust 99	TITLE Mounting, wheel, railway, steel, foreign service	MILITARY STANDARD MS87004
PROCUREMENT SPECIFICATIONS NONE	SUPERSEDES:	Page 1 of 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2240-0032

☆U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/6708

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:30Z
Check the source to verify that this is the current version before use.