FED. SUP CLASS
4730

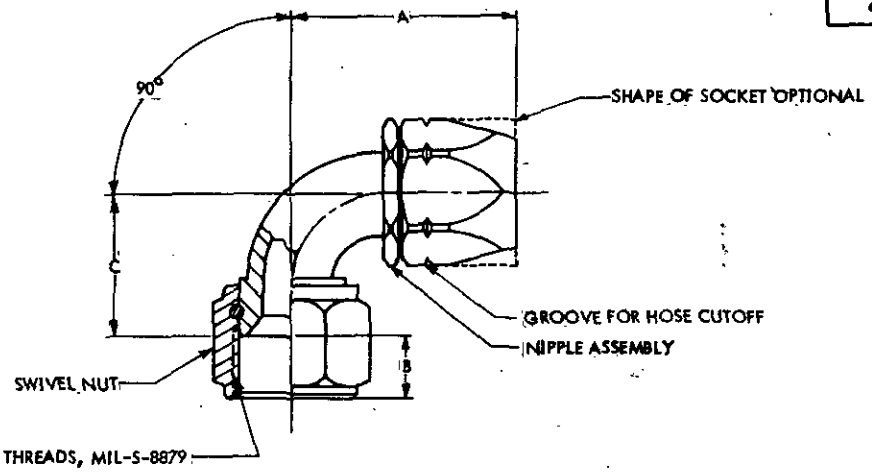


| DASH SIZE | THREAD "T" | A MAX | B (REF.) | C ± .035 TUBE | C ± .035 **FORGED | ACROSS FLAT *NUT, HEX | | WT. LBS. MAX |
|---|---|---|---|---|---|---|---|---|
| -3 | 3/8-24UNJF-3B | 1.58 | .34 | .654 | .530 | .496 | | .057 |
| -4 | 7/16-20UNJF-3B | 1.59 | .37 | .718 | .593 | .559 | | .071 |
| -5 | 1/2-20UNJF-3B | 1.68 | .38 | .844 | .655 | .621 | +.007 | .095 |
| -6 | 9/16-18UNJF-3B | 1.85 | .38 | .922 | .726 | .684 | -.000 | .058 |
| -8 | 3/4-16UNJF-3B | 2.01 | .43 | .938 | .900 | .871 | | .088 |
| -10 | 7/8-14UNJF-3B | 2.25 | .50 | 1.126 | | .996 | | .124 |
| -12 | 1-1/16-12UNJ-3B | 2.66 | .57 | 1.376 | | 1.246 | | .189 |
| -16 | 1-5/16-12UNJ-3B | 2.97 | .60 | 1.500 | | 1.496 | | .275 |
| -20 | 1-5/8-12UNJ-3B | 3.38 | .64 | 1.782 | | 1.812 | ±.016 | .476 |
| -24 | 1-7/8-12UNJ-3B | 3.62 | .74 | 2.032 | | 2.125 | ±.020 | .676 |
| -32 | 2-1/2-12UNJ-3B | 4.22 | .92 | 2.532 | | 2.750 | ±.020 | .953 |

*For dash sizes -3, -20, -24, and -32, across flat dimensions of AN 818 are acceptable provided maximum weight limits are not exceeded.

(A) ** Inactive for New Design

NOTES

1. Materials: Socket: Aluminum.
   Nipple assy. (bent tube): Sizes -3, -4, -5 carbon steel; -6 and above, aluminum.
   Nipple assy. (forging): Sizes -3, -4, -5 aluminum or steel with steel nut; -6 and above, all aluminum.
2. Fittings for use with MS87027 hose. Swivel nut and cone seat of nipple shall mate with MS33656 end fittings.
3. ~~When required, drill lockwire holes per AS-1043 and add "L" after dash number.~~ (A)
4. ~~For forged nipple construction, add "F" after dash number.~~ (A)
5. Examples of part No.: MS87020-3, fitting assy., bent tube elbow, 3/8-24 swivel nut.
   ~~MS87020-3L, fitting assy., bent tube elbow, 3/8-24 swivel nut with lockwire holes.~~ (A)
   ~~MS87020-3F, fitting assy., forged elbow, 3/8-24 swivel nut.~~ (A)
   ~~MS87020-3LF, fitting assy., forged elbow, 3/8-24 swivel nut with lockwire holes.~~ (A)
6. Identification: See procurement specifications.
7. Dimensions in inches. Unless otherwise specified, tolerances: Decimals, ± .010; angles, ± 1°.
8. Referenced documents shall be of the issue in effect on date of invitation for bids.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) CANCELLED AFTER 15 JUNE 1976 - USE MIL-F-83798/3

APPROVED 10 May 69 REVISED (A) 3 OCT 1972 (B) 15 JUNE 1976

REVIEWER:
USER:

This standard has been approved by the Aviation Systems Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| P.A. ARMY (AV) Other Cust | TITLE: FITTING, FLARED, SWIVEL NUT, 90° MEDIUM PRESSURE HOSE | MILITARY STANDARD MS87020(AV) |
|---|---|---|
| PROCUREMENT SPECIFICATION MIL-H-38089(AV) | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-05-25T20:30Z
Check the source to verify that this is the current version before use.