FED. SUP CLASS
5950

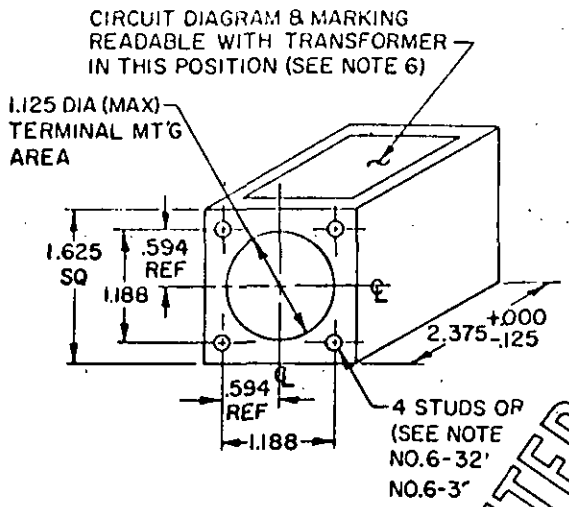

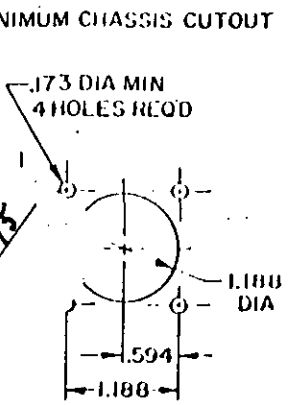

INCHES	MM
.125	3.18
.173	4.39
3/8	9.53
.594	15.09
1.125	28.58
1.188	30.18
1.625	41.28
2.375	60.33

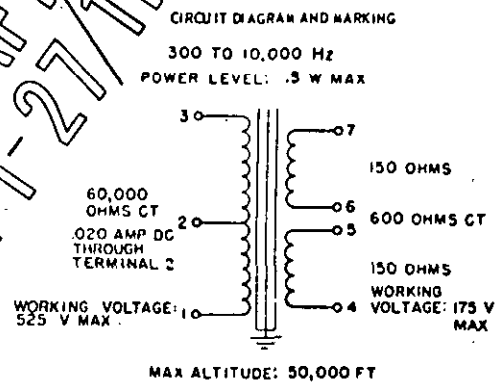

CANCELED AFTER 1 AUGUST 1975
USE MIL-T-27/11

NOTES:
1. All dime.
2. Unless othe. ...ace on overall case dimensions are 1.000 (.00 mm), -.063 (1.60 mm).
3. Tolerance on m... ...s are ±.016 (.41 mm). Mounting studs or inserts are symmetrically located with respect to the ... of the case.
4. Metric equivalents (to ... ...rest .01 mm) are shown for general information only and are based upon 1 inch = 25.4 mm.
5. Terminal arrangement optional within mounting area indicated.
6. Type designation, MS part no. and manufacturer's name or code symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement document referenced herein.
9. Inserts not recommended for new design.

Mounting	MS part no.	Type designation
Studs	MS90008-A	TF4RX13AJ005
Inserts	MS90008-B	TF4RX13AJ005

APPROVED 28 JUNE 1956 REVISED (A) 19 FEB 1960 (B) 21 SEP 65 (C) 3 SEP71 (D) 1 Aug 1975

User activities: Army MI, Navy MC, CG, Air Force 19

Reviewer activities: Army EL, MU, Navy EC, SH, Air Force 11, 80, 17

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-EL Other Cust NAVY-EC AIR FORCE - 80	International Interest	TITLE TRANSFORMER, AUDIO FREQUENCY, TYPE TF4RX13AJ005 ©	MILITARY STANDARD MS 90008
Procurement Specification MIL-T-27		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0498-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.