FED. SUP CLASS
5935

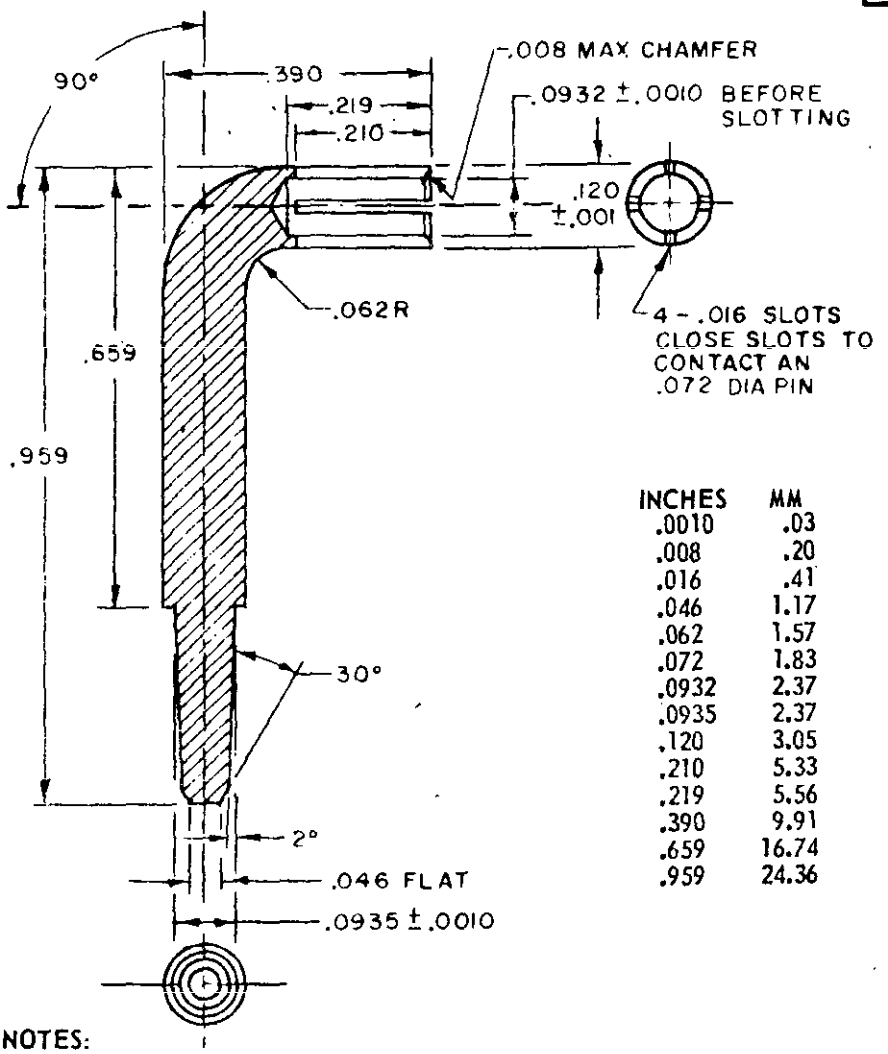

INCHES	MM
.0010	.03
.008	.20
.016	.41
.046	1.17
.062	1.57
.072	1.83
.0932	2.37
.0935	2.37
.120	3.05
.210	5.33
.219	5.56
.390	9.91
.659	16.74
.959	24.36

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are .xxx±.005 on decimals and ±½° on angles.
3. The material shall be Phospher Bronze per QQ-B-750 or Beryllium Copper per QQ-C-530 or QQ-C-533.
4. Referenced document shall be of the issue in effect on date of invitation for bid.
5. Heat treat in Salt bath to cond HT after forming when contact fabricated from Beryllium Copper.
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Entire standard revised.

(B) CANCELED AFTER 14 October 1980 NO SUPERSEDING STANDARD

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 703-023/4509

APPROVED 7 DEC 1951 REVISED (A) 25 NOV 1966 (B) 14 OCT 80

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A ARMY-EL	International Interest	TITLE	MILITARY STANDARD
Other Cust NAVY-SH AF 11		CONTACT, PART OF SERIES C CONNECTORS	MS90239
Procurement Specification NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1540

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:33Z
Check the source to verify that this is the current version before use.