FED. SUP CLASS
5935

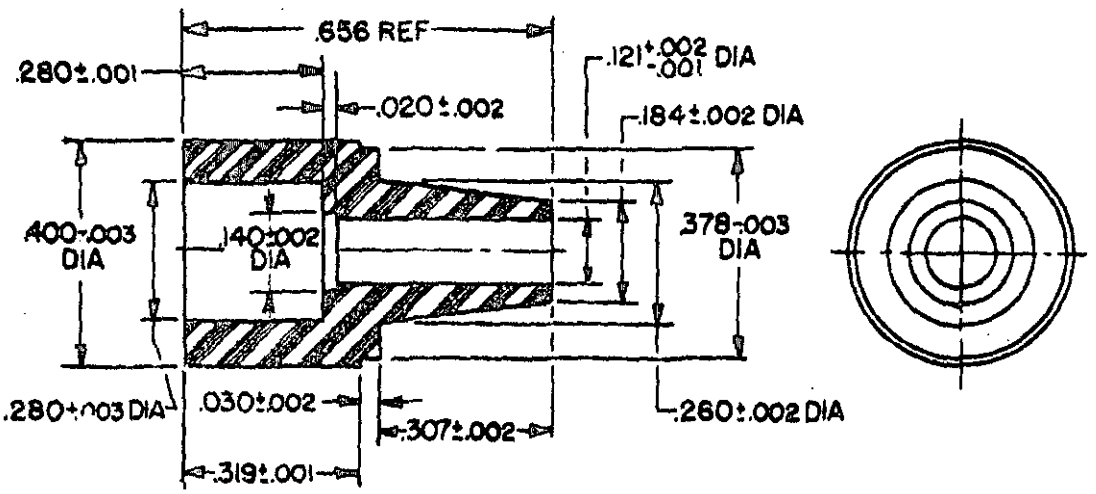

MS PART NO. MS90256-1

MATERIAL: POLYTETRAFLUOROETHYLENE.

1. All dimensions in inches.
2. Outside diameter of the bushing insulator to be concentric with inside diameter within .005 total indicator reading.
3. Referenced document shall be of the issue in effect on date of invitation for bids.
4. This standard takes precedence over document referenced herein.

THIS PART IS FOR DESIGN USE ONLY AND IS NOT TO BE STOCKED OR CATALOGED.

ENTIRE STANDARD REVISED

(B) CANCELED AFTER 14 October 1980 NO SUPERSEDING STANDARD

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 703-023/4507

P.A Sig C Other Cust Ships USAF	International interest	TITLE INSULATOR, BUSHING PART OF RF COAXIAL CONNECTORS	MILITARY STANDARD MS90256
Procurement Specification MIL-C-3989		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 7 DEC 1951 REVISED (A) 30 JUNE 1958 (B) 14 OCT 80

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:33Z
Check the source to verify that this is the current version before use.