MILITARY SPECIFICATION

CANISTER, M11

This amendment forms a part of MIL-C-10116C(EA), dated 31 January 1980, and is approved for use within the Chemical Research, Development and Engineering Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1, Under "DRAWINGS": Delete "B136-41-850-3 - Q216 Test Apparatus Agent Gas Sorption" and replace with the following: "B136-41-1800-3 - Tester, Filter Life, 50 LPM, Q224, Assembly".

3.2, After "with the lower sorbent-retainer assembly in place fill the sorbent container with 250 +/- 10ml of impregnated charcoal." Add the following:

"Charcoal shall be loaded into the M11 Canister by the sifter fill (snowfall) method as depicted in figure 1. During loading, a constant average air flow velocity of 40 $\pm$ 2 cm/sec updraft shall be maintained through the entire length of the sifter fill drop tube. Three circular screens shall be placed as shown in figure 1, with no gaps between screen edge and tube wall. Each screen shall be rotated so that mesh orientation is 30° $\pm$ 5° from the next screen.

Air entering the bottom of the sifter filler drop tube shall be evenly distributed around the diameter of the tube by the hole pattern such as depicted by figure 2. Air entry holes shall be located a minimum of .75 inch from bottom outside edge of sifter fill tube. Interface between bottom of fill tube and canister shall be designed to minimize airflow between them (i.e., telescoping or flexible collar). Air exiting the sifter fill drop tube shall be permitted an increase in velocity only after it has passed the entrance area for the falling charcoal. Two acceptable methods are shown in figures 3 & 4."

After page 2 add the following figures:

FSC 4240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.



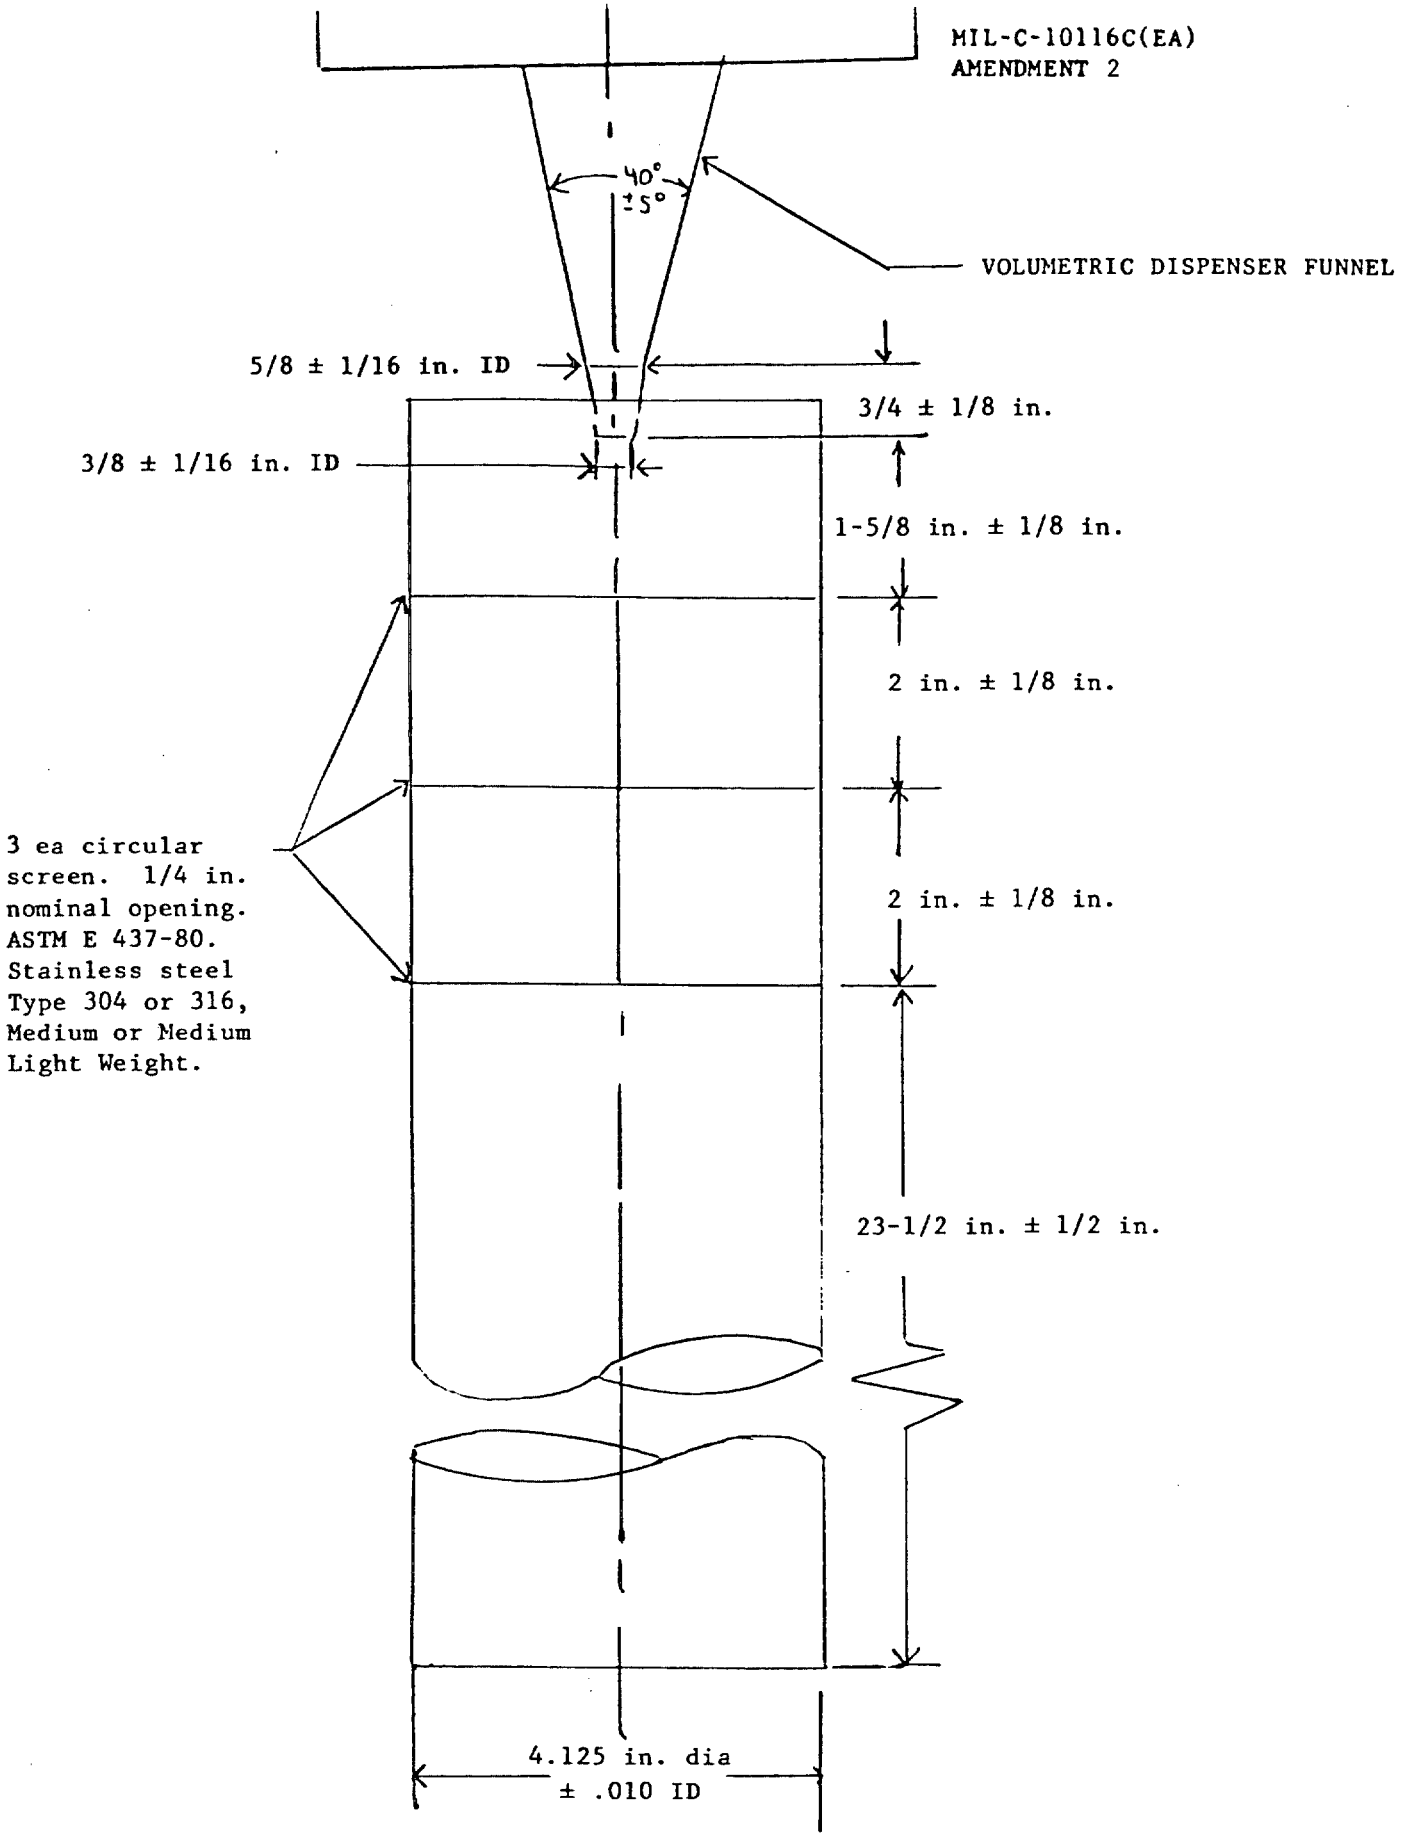


FIGURE 1. Sifter fill apparatus front view (air entry ports removed)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.

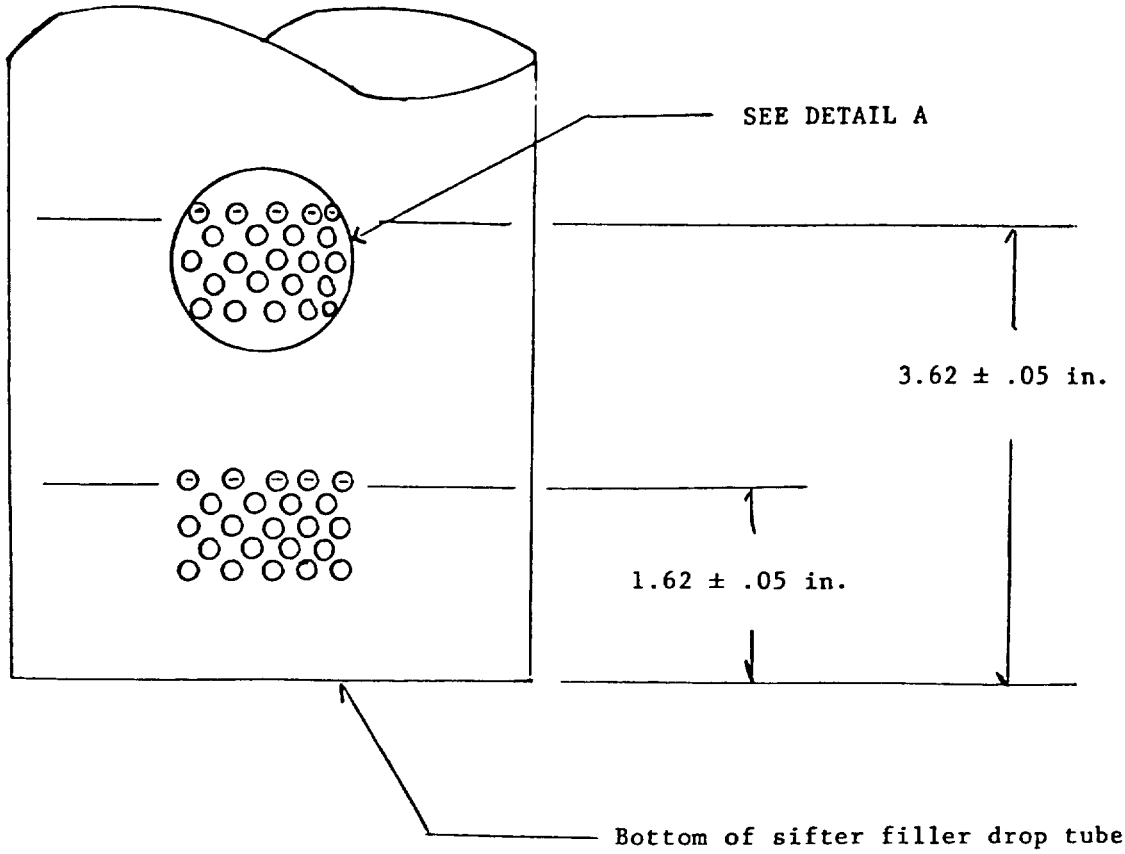

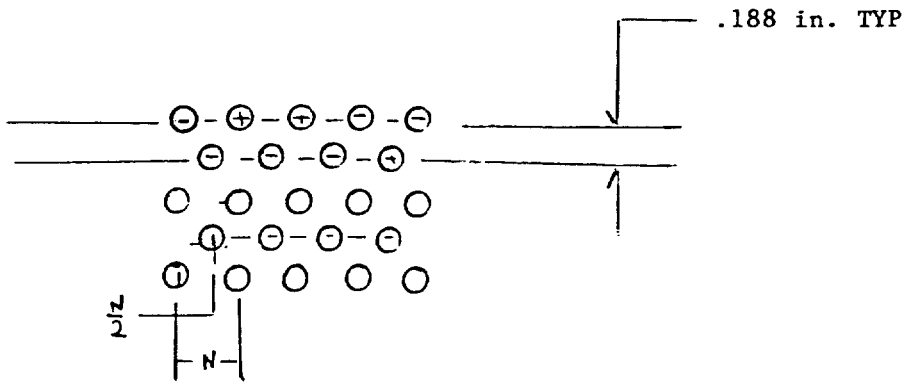

DETAIL A

EACH ROW SHALL CONSIST OF 36 HOLES OF .125 +/- .010 IN. DIA EQUALLY SPACED AROUND THE PERIPHERY, FIVE ROWS TOTAL, TWO PLACES, AS SHOWN

FIGURE 2. Air inlet hole pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.

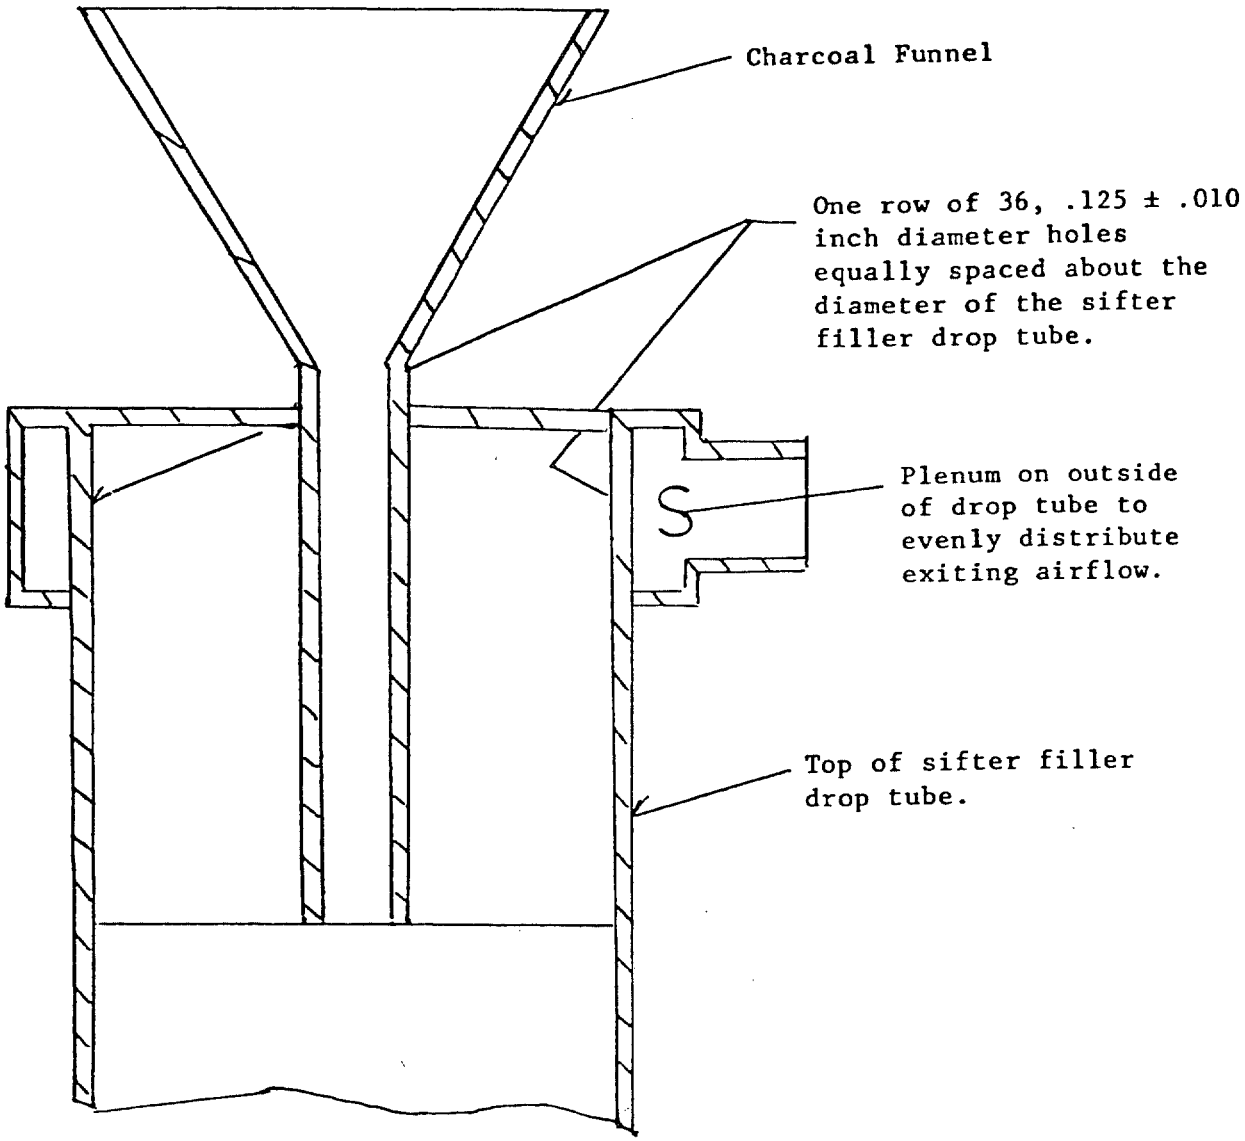


FIGURE 3. Top of drop tube alternative 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.

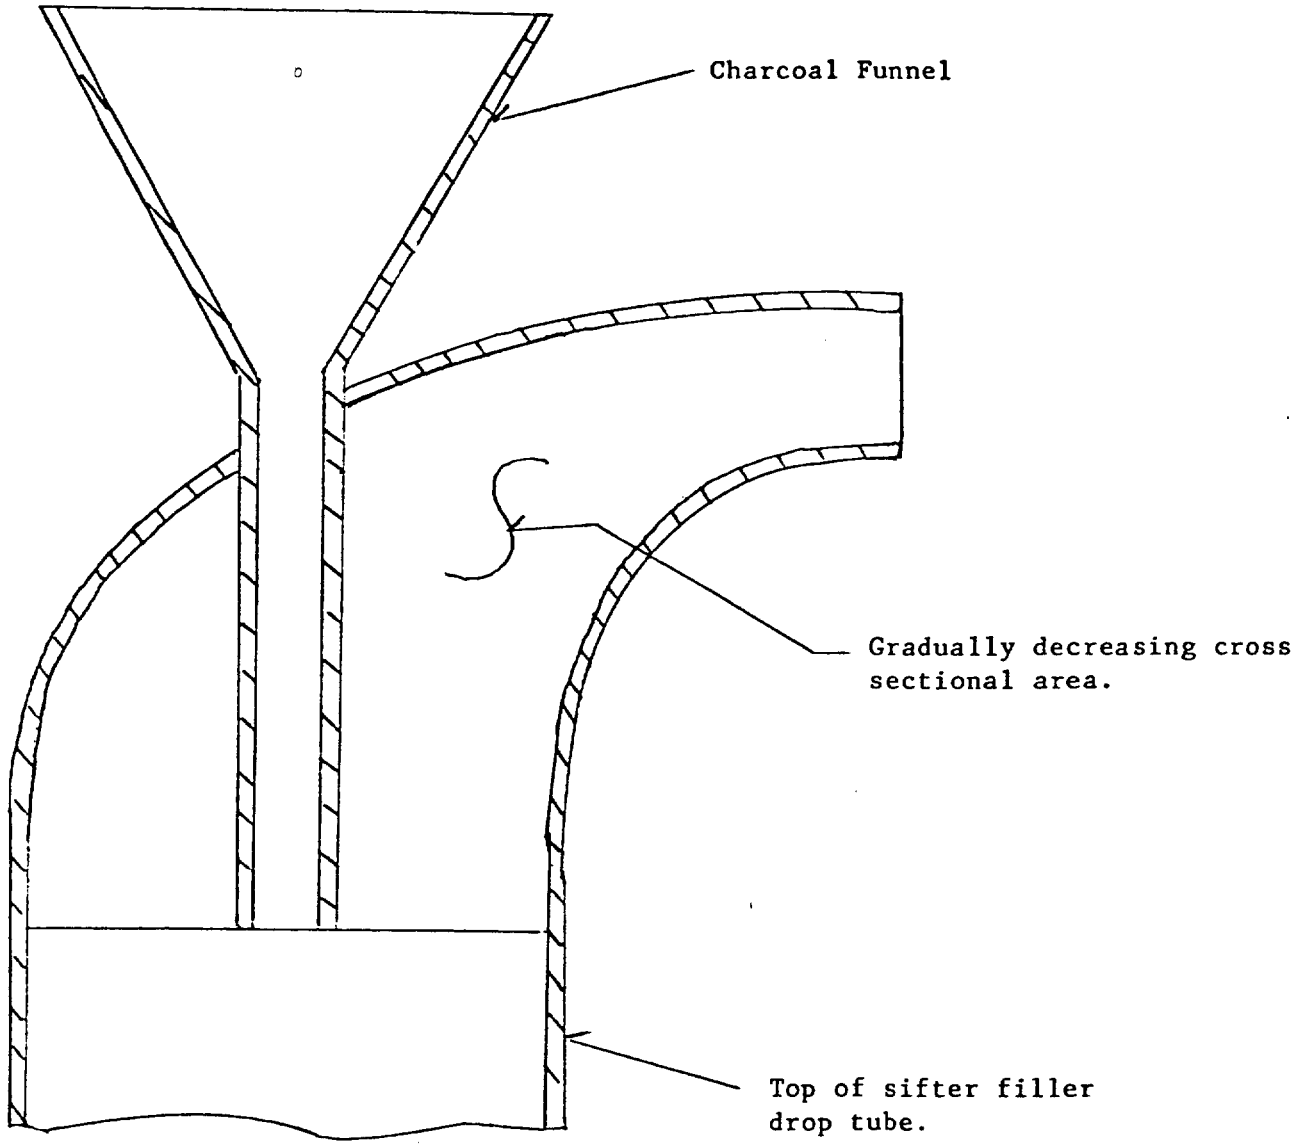


FIGURE 4. Top of drop tube alternative 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.

PAGE 5

4.4.1, Delete and replace with the following:

"4.4.1 Lotting. A lot shall consist of the canisters produced by one manufacturer, at one plant, from the same material, under essentially the same manufacturing conditions, and during one calendar week's continuous production, except that no more than one lot of impregnated charcoal or one lot of filter elements may be represented in one lot of canisters."

PAGE 7

4.4.3.4(b), Make the following changes:

	Major	Defects
Add:	110	Out of roundness (total indicator reading) incorrect

Change:	Major	Defects
From:	102	Rolled thread major diameter incorrect
To:	102	Rolled thread min. and max. major diameter incorrect
From:	108	Diameter at top of threaded neck
To:	108	Inside diameter at top of threaded neck (2.078)

PAGE 9

4.4.4.6, line 4: Delete "Q216 Test Apparatus Agent Gas Sorption (B136-41-850-3)" and replace with the following: "Q224, Tester, Filter Life, 50 LPM (B136-41-1800-3)".

In paragraph 4.4.4.6, make the following changes:

Under "RH", change:

FROM:	15%	TO:	15% Max
	80%		80% $\pm$ 3%
	15%		15% Max

Under "Rate of Airflow", change:

FROM:	32 liters/min[1]	TO	32 $\pm$ 1.0 liters/min[1]
	50 liters/min[2]		50 $\pm$ 1.6 liters/min[2]
	50 liters/min[1]		50 $\pm$ 1.6 liters/min[1]

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.

Add the following paragraph:

"5.3.1.1 Special Marking. Mark using 3/8 inch letters the following special marking adjacent to the contract data markings in accordance with MIL-STD-129: No Pad Insert Required."

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4240-A840

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:33Z
Check the source to verify that this is the current version before use.