MIL-V-0010134E(EA)
2 October 1974
SUPERSEDING
MIL-V-0010134D(MU)
24 October 1968
USED IN LIEU OF
MIL-V-10134C
14 March 1963

MILITARY SPECIFICATION

VALVE, OUTLET, CHEMICAL-BIOLOGICAL MASK, C15

This limited coordination Military specification has been prepared by Edgewood Arsenal based upon currently available technical information, but it has not been approved for promulgation as a coordinated revision of Military Specification MIL-V-10134C. It is subject to modification. However, pending its promulgation as a coordinated Military specification, it may be used in procurement.

1. SCOPE

1.1 This specification covers one type of chemical-biological mask outlet valve.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

STANDARDS

FEDERAL

FED-STD-123 - Marking for Domestic Shipment (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

DRAWINGS

US ARMY ARMAMENT COMMAND

EDGEWOOD ARSENAL

B5-2-597	-	Valve, Outlet, C15.
DLB136-44-1-3	-	Q212 Indicator, Inlet and Outlet Valve Resistance.
DL136-45-202-14	-	M4A1 Outlet Valve Leakage Indicator.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components. All materials and components cited on Drawing B5-2-597 and its subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.2 Manufacture and assembly. The outlet valve shall be manufactured and assembled in accordance with Drawing B5-2-597 and subsidiary drawings listed thereon.

3.3 Resistance to airflow. The assembled outlet valve shall have a resistance not exceeding a pressure differential of 22 millimeters of water at an airflow rate of 85 liters per minute when tested as specified in 4.4.4.1.

3.4 Outlet valve leakage. Leakage through the assembled outlet valve shall not exceed 15 milliliters of air per minute, at a pressure differential of 1 inch of water, when tested as specified in 4.4.4.2.

3.5 Preproduction sample. Prior to the start of regular production, a preproduction sample of outlet valves shall be produced in accordance with this specification for examination and tests (see 4.3). Any change in materials or operating conditions shall require a new preproduction sample.

3.6 Workmanship. The outlet valve shall be free from foreign matter, and damage such as distortion, dents, roughened valve seat, and torn disk that would impair its function.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to specified requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5, for which specific inspection has not been provided in this specification, have been satisfied.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection.

4.3.1 Sample. A preproduction sample of 10 outlet valves shall be produced using the same methods, materials, and equipment as will be used during regular production.

4.3.2 Inspection procedure.

4.3.2.1 For examination. The sample outlet valves shall be inspected for all requirements of the drawings and this specification.

4.3.2.2 For tests. The sample outlet valves shall be tested in accordance with 4.4.4.

4.3.3 Acceptance/rejection criteria. The preproduction sample shall meet the examinations and tests specified by 4.3.2 to be acceptable. The supplier shall obtain written approval from the contracting officer before proceeding with regular production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot shall consist of the outlet valves produced by one manufacturer, at one plant, from the same materials, and under the same manufacturing conditions. No more than one lot of outlet valve disks shall be represented in any one lot of outlet valves.

4.4.2 Sampling.

4.4.2.1 For examination and nondestructive tests. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.3 Inspection procedure.

4.4.3.1 For examination and nondestructive tests. Sample outlet valves shall be examined and tested in accordance with the classification of defects and with MIL-STD-105.

4.4.3.2 For critical defects. Each valve shall be inspected for critical defects.

4.4.3.3 Classification of defects.

(a) Valve, outlet, C15 (Dwg B5-2-597).

Categories	Defects	Acceptance standards
Critical:		
1	Outlet valve leakage	4.4.4.2
Major:	AQL 0.25 percent defective	
101	Outlet valve resistance to airflow	4.4.4.1
	AQL 1.0 percent defective	
102	Component missing, incorrect, or incorrectly assembled	
103	Workmanship (see 3.6)	
Minor:	AQL 2.5 percent defective	
201	Protective finish missing	
202	Wrong color	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

4.4.4 Tests.

4.4.4.1 Resistance to airflow. The outlet valve shall be tested for resistance to airflow with the Q212 Inlet and Outlet Valve Resistance Indicator (DLB136-44-1-3).

4.4.4.2 Outlet valve leakage. The outlet valve shall be tested for leakage with the M4A1 Outlet Valve Leakage Indicator (DL136-45-202-14).

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking, interplant shipment (see 6.4). The valves shall be packaged and packed to afford adequate protection from the supplier to the first receiving activity for immediate use. Shipping containers shall comply with the rules and regulations applicable to the mode of transportation. In addition to any marking required by the contract or order, marking shall conform to FED-STD-123.

5.2 Repair part. When this item is procured for storage and issue as a repair part, preservation, packaging, packing, and marking shall be as specified on the repair part packaging data sheet which is identified by the National Stock Number for the repair part.

6. NOTES

6.1 Intended use. The valve covered by this specification is intended for use with chemical-biological masks.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Preproduction:

(1) Time allowed for supplier submission of sample for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the supplier whether or not to proceed with production.

6.3 Component specifications.

Cover, Outlet Valve	-	MIL-C-10113.
Discs, Outlet Valve	-	MIL-D-10132.
Seat, Outlet Valve	-	MIL-S-10133.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

6.4 Interplant shipments. Packaging for supplies and materials which will not enter the military supply system. Typical interplant shipments are shipments from a vendor to a subcontractor or a prime contractor, or from a subcontractor to a prime contractor, or from a vendor or contractor to a military arsenal or plant.

6.5 International interest. Certain provisions of this specification are the subject of international standardization agreement QSTAG 216 and 234. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization channels including departmental standardization offices, if required.

6.6 Figure 1. Figure 1 is a miniature reproduction of assembly drawing and is attached for information only.

Custodians:

Army - EA
Navy - SH

Preparing activity:

Army - EA

Project No. 4240-A647

Review activity:


Navy - SH

User activity:

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

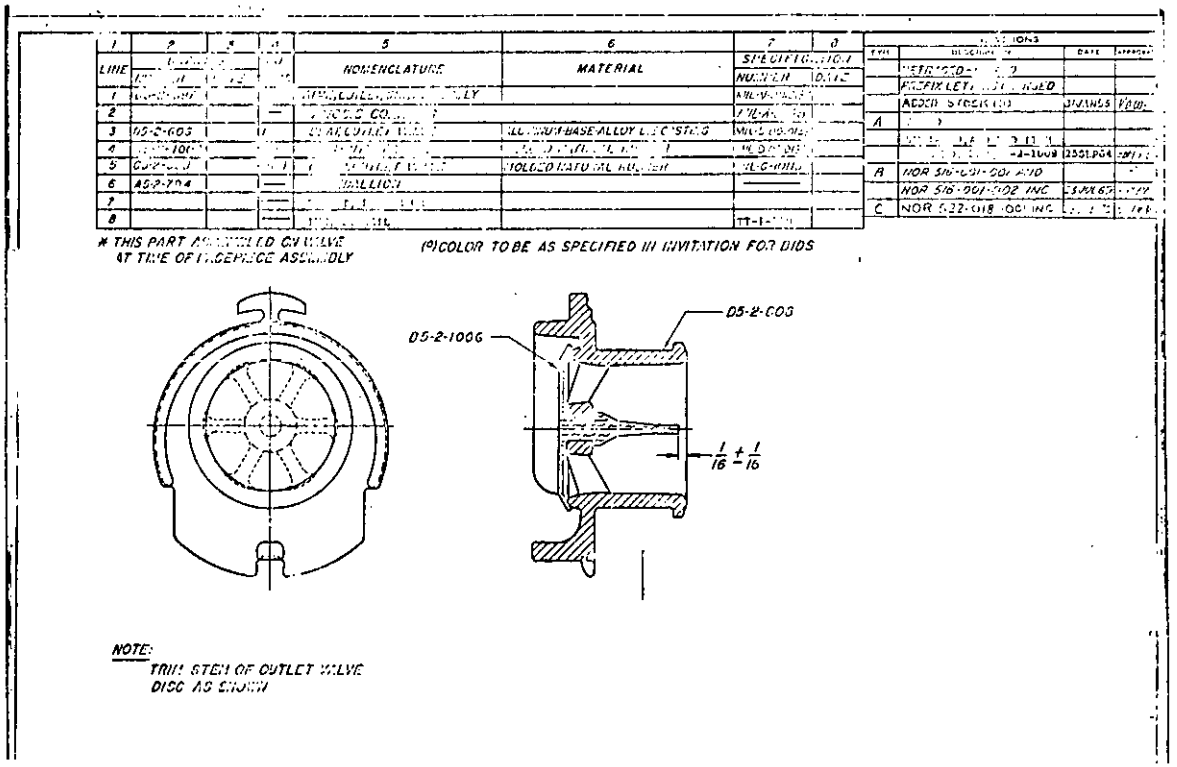

THIS FIGURE IS A MINIATURE COPY OF AN EDGEWOOD ARSENAL DRAWING AND IS FOR INFORMATION ONLY: THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS

Figure 1

Valve, Outlet, Chemical-Biological Mask, C15

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Edgewood Arsenal
ATTN: SAREA-TS-S
Aberdeen Proving Ground, MD 21010

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:36Z
Check the source to verify that this is the current version before use.