REVIEW INTEREST: DCSC, 69
USER INTEREST: YD, ATAC

FED. SUP CLASS
2805

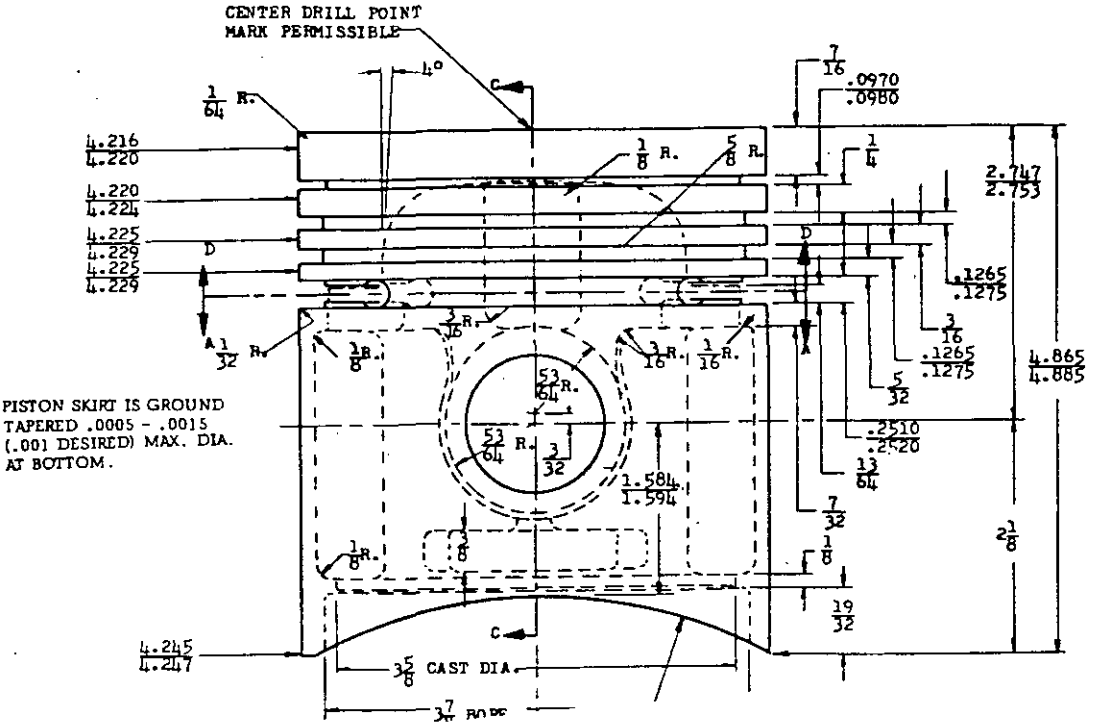

PISTON SKIRT IS GROUND TAPERED .0005 - .0015 (.001 DESIRED) MAX. DIA. AT BOTTOM.

SIDES OF
TRUE WI

RING LAN
EFFECT C

JIGGING I
NOTCHES
AS QUALIF

Ⓑ CANCELED AFTER 20 SEPTEMBER 1982
NO SUPERSEDING STANDARD

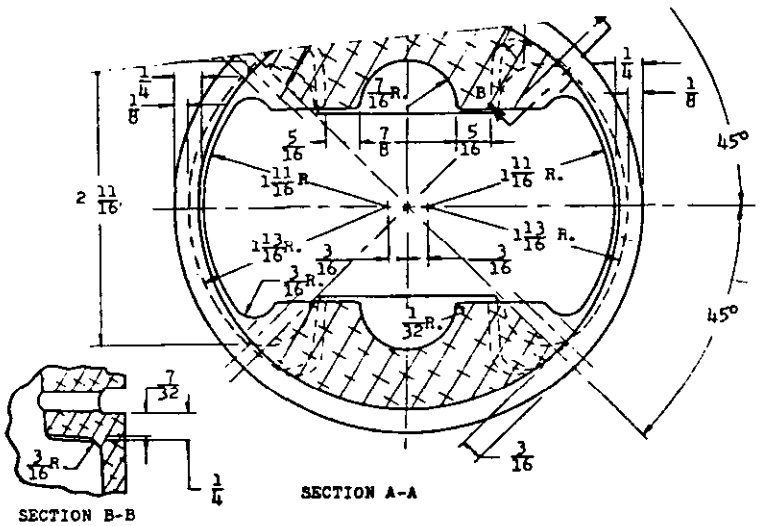

WT. OF FIN. PISTON:
1222 ± 4 GRAMS.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 24 OCT 1958 REVISED Ⓐ 15 DEC 1965 Ⓑ 20 SEPTEMBER 1982

P.A. MO (ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE: 4-1/4" x 4-7/8" COMP. HEIGHT 2-3/4"	PART NO. MS 13888-1 MILITARY STANDARD MS 13888
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 6

DD FORM 672-1 (Coordinated)

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:30Z
Check the source to verify that this is the current version before use.